

Rosetta Mars Express Venus Express

MaRS/ RSI/ VeRa

Radio Science File Naming Convention And Radio Science File Formats

Issue: 10
Revision: 5
Date: 30.11.2004
Document: MEX-MRS-IGM-IS-3016
ROS-RSI-IGM-IS-3087
VEX-VRA-IGM-IS-3009

Prepared by

Thomas Andert

Approved by

Martin Pätzold (MaRS Principal Investigator)

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	2 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

Page left free

Document Change Record

Issue	Rev	Sec	Date	Changes	Name
2.0	0.0	2	02.11.2002	Section 2 inserted	T.A.
		3		Section 3 inserted	
		4-7		Number of sections shifted	
		5		5.1.2.3 inserted	
		6		6.1.1.3.1 modified	
		All		Reviewed	
2.0	1.0	2	12.02.2003	Figure 2.1 updated	T.A.
		3		Section 3 edited	
		4		Table 4.1 and 4.2 edited	
		5		Section 5.1.2.2 inserted	
		6		Section 6.1.2 inserted	
2.0	2	All	22.05.2003	Some editing	mpa
3.0	0.0	All	04.06.03	Complete update	T.A.
4.0	0	All	08.07.2003	Complete revision	mpa
4	1	8.1 4.1 6.1	15.07.2003	Change of orbit predict file extension Change of RSR level 1a extension; predict file extensions Description of DSN file format	mpa
4	2	All 8.1 9.1	16.07.2003	All ATDF and ODR format descriptions removed New predict file formats Range calibration file format	mpa
4	3	4.2 5	20.07.2003	Introduction of descriptive files Old section 5 becomes new section 7	mpa
4	4	4.1 6.2.2	22.07.2003	New level 2 file types Changed Doppler output file format Changed file name format	mpa
4	5	6.2.2	30.07.2003	Changed Doppler output file format changed ranging output format	mpa
5	0	all	01.08.2003	after Stanford review	mpa

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	4 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

5	1	All	17.08.2003	DSS station numbers New file name formats TNF level 1b extensions After discussion CGN/Stan/JPL/ESA	mpa
5	2	all	19.08.2003	New file name format	mpa
5	3	4.1 6.2.2	25.08.2003	New L02 file types in Table 4-1 Introducing L02 Doppler output files for X-band and S-band each	mpa
5	4		26.08.2003	New L02 ranging file formats for X-band and S-band each	mpa
5	5	All 4.1 3.1.4 6.1.2 6.2.2	15.09.2003	Some editing New extensions for binary and ASCII files New Volume ID New formats for X- and S-band calibrated Doppler files Level 2, after discussion with VD and JPB	mpa
5	6	4.1 5.2.1.2 7.3 8.4 8.5 8.6	17.09.2003	Adding information about ancillary files	mpa
6	0	All 3.1.3 9 11 12	19.09.2003	RS comments included Document reorganized Volume name specified Calibration section expanded SPICE information included Example IFMS configuration file in Appendix	mpa
6	1	4.1 8.1 8.2	24.11.2003	New range data type identifier in Table 4.1 Tables updated Tables updated	mpa
6	2	2 4.1 6 7.3	29.11.2003	New Figures 2.1 and 2.2 New ODF file name definitions Table 4.1 TNF description replaced by ODF throughout section 6 New section 7.3	mpa
6	3	5.2.1 7.4.1 7.4.2 8.4 8.5	2.12.2003	Section 5.2.1.2.1.1 inserted Tables updated Tables updated Tables updated Tables updated Tables updated	B.S.

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	5 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

6	4	8.5.1	15.12.2003	Update file name	B.S.
6	5	4.1	03.02.2004	Update Table 4.1	mpa
		7.3.1		New data type identifier	
		8.1.1		New section	
		9.2		New section	
6	6	All	11.02.2004	Editing and correcting typos	mpa
		3.2		Table 3.4 updated	
		3.3		Table 3.5 updated	
		4.1		Table 4.1 updated	
		5		Explaining text introduced	
		5.1		Section corrected and revised	
		6.1		Updated	
		6.1.3.1		Table 6.5 and 6.6 corrected	
		6.1.3.2		revised	
		6.2		revised	
		12.2		Tables 6.12 and 6.13 corrected	
				New section; example labels	
6	7	4.1	12.02.2004	Table 4.1 updated	mpa
		8.3		Section deleted	
		10.1		Section reworked and revised	
6	8	3.2	17.02.2004	Table 3.4 revised	mpa
		3.3		Table 3.5 revised	
		4.1		Table 4.1 revised; data types added	
		5.1.2.3		Section revised	
		6.1.1.3		Tables revised	
		6.2.2		ODF Header File deleted	
		6.3		Level 2 tables revised	
		7.6 – 7.8		Table 6.9 revised	
		9.5		Sections added	
		9.6		Section added	
		2		Section added	
				Figur 2.1 updated	T.A.
6	9	12	18.2.2004	Appendix with Example PDS labels added	mf
6	10	12	15.03.2004	New section 12	mpa
6	11	beginning	18.03.2004	Axel Hagermann deleted from distribution list	LC
		All		some editing	
		1.3		section updated	
		3.2.1		Table 3.4: data level in data_set_id	
				description changed from PSA-level to CODMAC-level; footnote inserted	
		6.1.1.3.1		Level 1b file name corrected	
		6.1.1.3.2		Table 6-2, 6-3, 6-4 updated	
		7.1.2.2		Table 7-1 product_type replaced by standard_data_product_id and definition	

ROSETTA Radio Science Investigations RSI MARS EXPRESS Radio Science Experiment MaRS VENUS EXPRESS Radio Science VeRa Document name : File Naming Convention			
Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	6 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

5

6 of 161

VEX-VRA-IGM-IS-3009

		13.2.1.2 13.2.3.1 13.2.3.2 7.1.2.2	22.3.2004	values for instrument_id updated Section updated Section updated Section updated Table 7-1 Mission phase name inserted and updated Table 3-4: data description part updated	
6	12	11	23.3.2004	SPICE kernel names updated	CS
6	13	4.1 5.1.2.4 6.1.3.2.2	06.04.2004	Table 4.1 new data types introduced for covering BSR ancillary data from DSN/Stanford New section for BRO data Section updated	mpa
6	14	4.1 6.2.1.3.2. 6.2.1.3.2.1 6.2.1.6.1. 6.2.2.2. 6.2.2.3.2.1 13.2. 9.4.1 7.2.1. 6.1.1.3.2.1 6.2.1.3.2.1 6.2.1.3.2.2 6.2.1.3.2.4 6.2.2.3.2.1 6.2.2.3.2.2 9.1.2. 9.2.3. 9.3.2. 10.1.3. 6.2.1.3.2.2 6.2.2.2 6.2.1.3.1.2 6.2.1.3.2. 7.2.1 5.2.1.1.3. 6.2.1.3.2.7	12.07.2004	Table 4.1 updated with new Doppler names D1X,D1S,D1X,D2S instead of DP1,DP2 and for level 1a&1b and calibration file names updated: C1S,C1X,C2X,C2S inserted updated with new Doppler file names Meteo file name updated .TAB instead of .AUX as ending calibration file names updated C1X,C1S,C2X,C2S instead of DP1,DP2; RNG,AG1,AG2 deleted from table MJD time format updated to 12:00 01.01.2000 RNG replaced by RGX, RGS updated with new Doppler, Ranging and Calibration file names New section added New section added	LC

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	7 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

		6.2.1.3.1. 9.3. 9.3.1. 9.3.2. 9.4.		Description extended New section "IFMS doppler calibration file" added Description extended	
7	0	4.1 5.2 6.1 6.2 8.4 & 8.5 11	25.08.2004	Table 4.1 updated Section 5.2 updated 5.2.1.1.9 deleted Tables in 6.1 updated Section 6.2 updated Section 8.4 and 8.5 file names corrected Section 11 updated	mpa et al.
7	1	3	31.08.2004	Revision of section 3	mpa
7	2	3	6.9.2004	Volumes and Datasets Organization, Formats and Name Specification Reintroduced in Section 3	mf
7	3	3.2.1 3.2.2 3.2.4.2. 7.1.2.2. 8.3. 12 13.2.3 All	13.9.2004	Data_set_id updated Data_set_id updated Description of volume CD updated New keyword added processing_level_id 8.3. section deleted New section Labels and tables updated Update of time description in tables	LC
		7.3.1.1 7.3.2.1		file name updated file name updated	bs
8	0	10	14.09.04	file name updated	
8	1	All	15.09.2004	Some editing	mpa
9	0	6.5	16.09.2004	Update tables 6.5 and 6.6	mpa
9	1	3.2.1.1. 3.2.1.2. 3.2.2.1 3.2.3.1 3.2.4.2 3.2.5 3.2.5.1 6 6.1.1.3.2. 7 8 9.2.3. 9.3.2.	20.09.2004	added radio science missione phase description new section added: Dataset name Table 3.4 updated section updated. Definition of volume_id clarified volume_set_name defined Figure 3.2: description of figure updated New section: Volume series New section: Volume series name Tables 6.5 – 6.8, Tables 6.11-6.14 time description updated Subsections 1-4 time description updated Table 7.1 updated Tables 8.1-8.4 time description updated time description updated	LC

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	8 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

		9.4.2. 10.1.3.		Table 10.2 time description updated	
9	2	4.1 9.6	22.09.2004	Table 4.1 updated New section 9.6	Mpa
9	3	6	23.09.2004	Tables 6.6 and 6.7 edited Tables 6.1 – 6.4 updated New Table 6.5 included	mpa
9	4	6 7 8 9 10 12.1.2 12.2.3 13.3.3	29.09.2004	Tables 6.1 – 6.9 updated Tables 6.11 - 6.15 updated Table 7-1 keyword original_product_id replaced by source_product_id Tables 8.1- 8.4 updated sections 9.2.3, 9.3.2, 9.4.2, 9.6.2 updated Table 10-2 updated Description of ephemeris time corrected Replaced old example labels by new ones	LC
9	5	6	08.10.2004	Update of tables 6.6 and 6.7	mpa
9	6	4.1 6 6.1.1.3.1 9.5 11	22.10.2004	Update Table 4.1 Revised tables 6.1 – 6.5 Update tables 6.6 and 6.7 after discussions with GLT and RAS. Tables 6.8 and 6.9 revised ODF L1A and L1B file names updated DSN METEO file updated Update of SPICE file names	mpa
9	7	6	24.10.2004	Correction of Tables 6.6 and 6.7	mpa
10	1	4 6 7	27.10.2004	Update of Table 4.1. Inserted new file ending .RAW Section 4.2 file extension .RAW added Section 6.2.1.3.1. file extension .RAW added Update of Table 7.1 updated value for producer_id	LC
10	2	3	08.11.2004	Mission phases updated	CS
10	3	9.9	23.11.2004	Section about wrong uplink frequency added	CS
10	4	3.2	29.11.2004	Data_set_id and Data_set_name changed VOLUME_NAME updated	LC
10	5	6	01.12.2004	Tables section 6 updated	mpa

DISTRIBUTION LIST

Destination	Number of copies
<u>RSI Team:</u>	
Martin Pätzold	1
Jörg Schmitt	1
<u>MaRS Team:</u>	
Martin Pätzold	1
Christina Stanzel	1
Thomas Andert	1
Markus Fels	1
Alexander Gahr	1
Ralf Schaa	1
Barbara Stracke	1
Ludmila Carone	1
Len Tyler	1
Richard Simpson	1
Dave Hinson	1
Jörg Selle	1
Bernd Häusler	1
Véronique Dehant	1
Jean-Pierre Barriot	1

ACRONYMS

AAS	Atmosphere Analysis Software
AGC	Automatic Gain Control
AMMOS	Advanced Multi-Mission Operations System
ATDF	Archival Tracking Data Files
ADC	Analog to Digital Converter
BWG	Beam Wave Guide ground station (DSN)
CALI	calibration file
CHDO	Compressed Header Data Object
DDS	Data Distribution System
DSMS	Deep Space Mission System
DSN	Deep Space Network
ESA	European Space Agency
ESOC	European Space Operations Centre
G/S	Ground Station
HEF	High Efficiency ground station (DSN)
IFMS	Intermediate Frequency Modulation System
JPL	Jet Propulsion Labatory
MEX	Mars Express
MGs	Mars Global Surveyor
NEA	NEAR
NNO	New Norcia Station (Perth)
ODF	Orbit Data File
ODR	Original Data Record
PDS	Planetary Data System
ROS	Rosetta
RSI	Radio Science Investigation
RSR	Radio Science Receiver
S/C	Spacecraft
SFDU	Standard Formatted Data Unit
TNF	Tracking and Navigation File
ULS	Ulysses
UniBw	Universität der Bundeswehr UniBw

Contents

<u>1 INTRODUCTION.....</u>	<u>17</u>
1.1 PURPOSE OF THE DOCUMENT.....	17
1.2 DOCUMENT OVERVIEW.....	17
1.3 REFERENCED DOCUMENTS.....	18
<u>2 DATA FLOW.....</u>	<u>19</u>
<u>3 MARS, RSI AND VERA VOLUMES AND DATASETS ORGANIZATIONS, FORMATS AND NAME SPECIFICATIONS</u>	<u>21</u>
3.1 DEFINITIONS AND GENERAL CONCEPT.....	21
3.1.1 DEFINITIONS.....	21
3.1.1.1 Data Product.....	21
3.1.1.2 Data Set.....	21
3.1.1.3 Data Set Collection	21
3.1.1.4 Volume.....	21
3.1.1.5 Volume Set.....	21
3.1.2 DATA- AND VOLUME SET ORGANIZATION	22
3.2 VOLUME AND DATASET NAME SPECIFICATION	23
3.2.1 DATASET	23
3.2.1.1 Dataset ID	23
3.2.1.2 Dataset Name	27
3.2.2 DATASET COLLECTION	28
3.2.2.1 Dataset Collection ID.....	28
3.2.3 VOLUME	30
3.2.3.1 Volume ID.....	30
3.2.3.2 Volume Name	31
3.2.4 VOLUME SET	32
3.2.4.1 Volume Set ID	32
3.2.4.2 Volume Set Name	33
3.2.5 VOLUME SERIES	35
3.2.5.1 Volume Series Name	35
<u>4 GENERAL FILE NAMING CONVENTION.....</u>	<u>37</u>
4.1 FILE NAME FORMAT	37
4.2 DATA FILES	37
4.3 DESCRIPTIVE FILES.....	37
<u>5 RAW TRACKING DATA FILES (LEVEL 1A).....</u>	<u>43</u>
5.1 DEEP SPACE NETWORK TRACKING DATA.....	43

5.1.1	FILE NAMES OF INCOMING LEVEL 1A DSN RAW DATA FILES	43
5.1.2	FILE FORMATS OF INCOMING LEVEL 1A DSN RAW DATA FILES	43
5.1.2.1	ODF Level 1a.....	43
5.1.2.2	RSR Level 1a	44
5.1.2.3	Incoming ancillary files from the DSN	45
5.1.2.3.1	DSN meteorological calibration file	45
5.1.2.3.2	DSN tropospheric calibration model file	45
5.1.2.3.3	DSN ionospheric calibration model file.....	45
5.1.2.3.4	DSN monitor files	45
5.1.2.3.5	DSN Network Monitoring Control files	45
5.1.2.3.6	DSN Sequence of Events file.....	45
5.1.2.3.7	SPICE kernels	45
5.1.2.4	RSR Level 1a Browse Data Plots.....	46
5.2	ESA – NEW NORCIA STATION (LEVEL 1A)	47
5.2.1	FILE NAMES OF INCOMING LEVEL 1A IFMS FILES	47
5.2.1.1	IFMS Level 1a incoming raw data files.....	47
5.2.1.1.1	IFMS raw data file name format	47
5.2.1.1.2	IFMS raw data file format.....	48
5.2.1.1.3	Level 1a file name format	48
5.2.1.2	Incoming ancillary files from ESOC DDS.....	48
5.2.1.2.1	ESOC DDS file name convention.....	48
5.2.1.2.1.1	Conventions	48
5.2.1.2.2	S/C attitude file, reconstructed.....	50
5.2.1.2.3	Orbit event file	50
5.2.1.2.4	S/C orbit file during cruise, heliocentric	50
5.2.1.2.5	S/C orbit file during mission, Marscentric	50
5.2.1.2.6	SPICE kernels	50

6 PROCESSED TRACKING DATA (LEVEL 1B AND 2)..... 51

6.1	DEEP SPACE NETWORK.....	51
6.1.1	CLOSED-LOOP ODF LEVEL 1B PRODUCTS	51
6.1.1.1	Specifications Document	51
6.1.1.2	Input file.....	51
6.1.1.2.1	ODF level 1a file.....	51
6.1.1.3	Output Level 1b products.....	52
6.1.1.3.1	File name formats.....	52
6.1.1.3.2	Data file formats for Level 1b ODF files	53
6.1.1.3.2.1	File format of S-band Doppler	53
6.1.1.3.2.2	File format of X-band Doppler	54
6.1.1.3.2.3	File format of S-band ranging	55
6.1.1.3.2.4	File format of X-band ranging	56
6.1.1.3.2.5	File format of the uplink ramp rate file.....	57
6.1.2	CLOSED-LOOP ODF LEVEL 2 PRODUCTS.....	58
6.1.2.1	Specifications document	58
6.1.2.2	Input file.....	58
6.1.2.2.1	The orbit prediction file PTW or PON.....	58
6.1.2.2.2	The orbit reconstructed file RTW or RON.....	58
6.1.2.3	ODF Level 2 products.....	59
6.1.2.3.1	ODF file name formats Level 2	59

6.1.2.3.2	ODF file formats Level 2	59
6.1.2.3.2.1	Calibrated Doppler files DPX and DPS	59
6.1.2.3.2.2	Calibrated ranging files RGX and RGS	65
6.1.3	OPEN-LOOP RSR LEVEL 2	68
6.1.3.1	Specification Document	68
6.1.3.2	Open-loop RSR Level 2 products	68
6.1.3.2.1	Open-loop Doppler file products Level 2	68
6.1.3.2.1.1	Open-loop Doppler File name format	68
6.1.3.2.1.2	Open-loop Doppler File formats	69
6.1.3.2.2	Bistatic Radar products	70
6.1.3.2.2.1	File name format	70
6.1.3.2.2.2	Bistatic Radar products level 2: Power Spectra	70
6.1.3.2.2.3	Bistatic Radar products level 2: Surface Reflection Geometry File	71
6.2	NEW NORCIA STATION (LEVEL 1B AND LEVEL 2).....	72
6.2.1	CLOSED-LOOP IFMS LEVEL 1B PRODUCTS	72
6.2.1.1	Specifications document	72
6.2.1.2	Input files	72
6.2.1.2.1	IFMS level 1a files	72
6.2.1.3	Output IFMS Level 1b products	73
6.2.1.3.1	File name formats.....	73
6.2.1.3.2	Data file formats.....	74
6.2.1.3.2.1	The Doppler Files D1S, D1X, D2S, D2X.....	74
6.2.1.3.2.2	The Ranging Files RGX, RGS	75
6.2.1.3.2.3	The Meteorological File MET	75
6.2.1.3.2.4	The AGC files AG1 and AG2.....	76
6.2.1.3.2.5	The range calibration file RCX or RCS	76
6.2.1.3.2.6	The configuration files CFG	76
6.2.1.3.2.7	The doppler calibration files C1X, C1S, C2X, C2S.....	76
	See section 9.3.....	76
6.2.2	CLOSED-LOOP IFMS LEVEL 2 PRODUCTS.....	77
6.2.2.1	Specifications document	77
6.2.2.2	Input files	77
6.2.2.2.1	The orbit reconstructed file RTW or RON.....	77
6.2.2.2.2	The range calibration file RCX or RCS	77
6.2.2.3	Output IFMS Level 2 products	78
6.2.2.3.1	File name formats.....	78
6.2.2.3.2	Data file formats Level 2.....	78
6.2.2.3.2.1	Calibrated Doppler files D1X, D1S, D2X, D2S	78
6.2.2.3.2.2	Calibrated ranging files RGX and RGS	78

7 FORMAT OF DESCRIPTIVE FILES..... 79

7.1	PDS LABEL FILES.....	79
7.1.1	FILE NAME	79
7.1.2	FILE FORMAT	79
7.1.2.1	Header of label files	79
7.1.2.2	Description part of label files	79
7.2	IFMS CONFIGURATION FILES.....	82
7.2.1	FILE NAME	82
7.2.2	FILE FORMAT	82

7.3	ESOC ANCILLIARY FILES.....	83
7.3.1	SPACECRAFT ATTITUDE DATA; RECONSTRUCTED	83
7.3.1.1	File name.....	83
7.3.1.2	File format.....	83
7.3.2	SPACECRAFT ORBIT EVENT FILE.....	84
7.3.2.1	File name.....	84
7.3.2.2	File format.....	84
7.4	INFORMATION FILES.....	85
7.4.1	FILE NAME.....	85
7.4.2	FILE FORMAT	85
7.5	DSN MONITOR FILE.....	86
7.5.1	SPECIFICATION DOCUMENT	86
7.5.2	FILE NAME	86
7.5.3	FILE FORMAT	86
7.6	DSN NETWORK MONITORING CONTROL FILE	87
7.6.1	SPECIFICATION DOCUMENT	87
7.6.2	FILE NAME	87
7.6.3	FILE FORMAT	87
7.7	DSN SEQUENCE OF EVENTS FILE.....	88
7.7.1	SPECIFICATION DOCUMENT	88
7.7.2	FILE NAME	88
7.7.3	FILE FORMAT	88
8	<u>ORBIT FILES.....</u>	<u>89</u>
8.1	DOPPLER AND RANGE PREDICTION FILE	89
8.1.1	SPECIFICATION DOCUMENT	89
8.1.2	FILE NAME	89
8.1.3	FILE FORMAT	89
8.1.3.1	Two-way Doppler and range predict files.....	89
8.1.3.2	One-way Doppler and range predict files	90
8.2	RECONSTRUCTED DOPPLER & RANGE ORBIT FILE	91
8.2.1	FILE NAME.....	91
8.2.2	FILE FORMAT	91
8.2.2.1	Two-way Doppler and range reconstructed orbit files.....	91
8.2.2.2	One-way Doppler and range reconstructed orbit files	92
8.3	SPACECRAFT HELIOCENTRIC CRUISE ORBIT FILE.....	93
8.3.1	FILE NAME.....	93
8.3.2	FILE FORMAT	93
8.4	SPACECRAFT MARSCENTRIC ORBIT FILE	94
8.4.1	FILE NAME.....	94
8.4.2	FILE FORMAT	94
9	<u>CALIBRATION FILES</u>	<u>95</u>
9.1	IFMS RANGE CALIBRATION LEVEL 1B.....	95
9.1.1	FILE NAME	95
9.1.2	FILE FORMAT	95
9.2	IFMS RANGE CALIBRATION LEVEL 2	96

9.2.1	SPECIFICATION DOCUMENT	96
9.2.2	FILE NAME	96
9.2.3	FILE FORMAT	96
9.3	IFMS DOPPLER CALIBRATION FILES	97
9.3.1	FILE NAME	97
9.3.2	FILE FORMAT	97
9.4	IFMS METEOROLOGICAL CALIBRATION	98
9.4.1	FILE NAME FORMAT	98
9.4.2	FILE FORMAT	98
9.5	DSN METEO CALIBRATION FILE	99
9.5.1	FILE NAME FORMAT	99
9.5.2	FILE FORMAT	99
9.6	DSN MODIFIED METEO CALIBRATION FILE	100
9.6.1	FILE NAME FORMAT	100
9.6.2	FILE FORMAT	100
9.7	DSN TROPOSPHERIC CALIBRATION MODEL FILE	101
9.7.1	SPECIFICATION DOCUMENT	101
9.7.2	FILE NAME FORMAT	101
9.7.3	FILE FORMAT	101
9.8	DSN IONOSPHERIC CALIBRATION FILE.....	102
9.8.1	SPECIFICATION DOCUMENT	102
9.8.2	FILE NAME FORMAT	102
9.8.3	FILE FORMAT	102
9.9	CORRECTED UPLINK FREQUENCY	103

10 GEOMETRY FILES 104

10.1	PLANETARY CONSTELLATION GEOMETRY	104
10.1.1	SPECIFICATION DOCUMENT	104
10.1.2	FILE NAME.....	104
10.1.3	FILE FORMAT	105

11 SPICE..... 106

11.1	INTRODUCTION	106
11.1.1	SPICE FILES	106
11.1.2	FILE HANDLING AND DESCRIPTION	106
11.2	SPK ORBIT KERNEL FILE	107
11.2.1	FILE NAME	107
11.3	EK EPHEMERIS KERNEL FILE	108
11.3.1	FILE NAME	108
11.4	CK C-MATRIX INSTRUMENT ATTITUDE FILE.....	109
11.4.1	FILE NAME	109
11.5	TLS LEAP SECOND KERNEL FILE.....	110
11.5.1	FILE NAME	110
11.6	FK FRAME KERNEL FILE	111
11.6.1	FRAME KERNEL FILE NAME	111
11.6.2	LOCATION KERNEL FILE NAME	112
11.7	IK INSTRUMENT KERNEL FILE	113

11.7.1	FILE NAME.....	113
11.8	ORBNUM ORBIT NUMBERING FILE	114
11.8.1	FILE NAME.....	114
11.9	PCK PLANETARY CONSTANT FILE.....	115
11.9.1	FILE NAME.....	115
11.10	SCLK SPACECRAFT CLOCK KERNEL FILE.....	116
11.10.1	FILE NAME.....	116

12 TIME STANDARDS AND FORMATS..... 118

12.1	TIME STANDARDS	118
12.1.1	COORDINATED UNIVERSAL TIME (UTC).....	118
12.1.2	DYNAMICAL TIME SCALE T_{EPH} FOR THE JPL DE 405 EPHEMERIS.....	119
12.1.3	OTHER TIME STANDARDS	119
12.1.3.1	Barycentric Dynamic Time (TDB)	119
12.1.3.2	International Atomic Time (TAI).....	119
12.1.3.3	Terrestrial Dynamic Time (TT)	120
12.1.3.4	GMT (UT).....	120
12.1.3.5	Universal Time (UT1).....	121
12.1.3.6	Geocentric Coordinate Time (TCG)	122
12.1.3.7	Barycentric Coordinate Time (TCB)	122
12.1.3.8	Julian Date (JD)	123
12.1.3.9	Modified Julian Date (MJD)	123
12.2	TIME FORMATS	123
12.2.1	ISO TIME FORMAT	123
12.2.2	TIME IN FRACTIONS OF DAYS OF YEAR	123
12.2.3	EPHEMERIS TIME FORMAT	123

13 APPENDIX..... 124

13.1	IFMS CONFIGURATION FILE EXPLANATION.....	124
13.2	EXAMPLE PDS LABELS	138
13.2.1	DSN ODF PRODUCTS	138
13.2.1.1	Level 1a.....	138
13.2.1.2	Level 1b.....	140
13.2.1.3	Level 2.....	142
13.2.2	DSN RSR PRODUCTS	143
13.2.2.1	Level 1a.....	143
13.2.2.2	Level 2.....	145
13.2.3	IFMS CLOSED-LOOP PRODUCTS	146
13.2.3.1	Level 1a.....	146
13.2.3.2	Level 1b.....	148
13.2.3.3	Level 2.....	154
13.2.4	IFMS OPEN-LOOP PRODUCTS	160
13.2.4.1	Level 1a.....	160
13.2.4.2	Level 2.....	160

1 INTRODUCTION

1.1 PURPOSE OF THE DOCUMENT

The Radio Science Investigations (RSI) experiment on board of ESA's mission Rosetta, Mars Express and Venus Express will use the S/C radio system to perform their experiments. Data from the tracking ground stations will be collected and pre-processed at IGM Cologne. This Document describes the different kinds of data files, their formats and naming conventions, which will be generated during the operational phase of both missions Mars Express and Rosetta.

1.2 DOCUMENT OVERVIEW

Section 2 shows the data flow of the tracking and processed data files

Section 3 defines volume and dataset name conventions of the data media for data archiving and distribution to PDS

Section 4 defines the general file naming convention of data files and label files of the different data archiving levels

Section 5 defines the file name convention and the formats of the raw data files used by Rosetta RSI and MaRS of level 1a

Section 6 defines the file name convention and the formats of the data files used by Rosetta RSI and MaRS up to level 2

Section 7 defines the formats and file names of the descriptive files

Section 8 defines the file names and formats of the predicted and reconstructed orbit files, both from UniBw and ESOC

Section 9 defines the file names and formats of the calibration files from ESOC and DSN concerning ranging and media calibrations.

Section 10 defines file names and formats of geometries

Section 11 defines old and MaRS generated file names of files related to SPICE

Section 12 is an Appendix

1.3 REFERENCED DOCUMENTS

The following documents are referenced in the MaRS FOM, and may be referred to if more information is needed.

	document Number	Title	Issue Number	Date
1	GRST-TTC-GS-ICD-0518-TSOG	IFMS-to-OCC interface	9.3.1	
2	MEX-MRS-IGM-MA-3017	IFMS-Read-Program-Manual	TBD	TBD
3	ROS-RSI-IGM-MA-3113 MEX-MRS-IGM-MA-3026	RSR-Read-Program-Manual	TBD	TBD
4	820-013, 0159-Science	Radio Science Receiver Standard Formatted Data Unit	Draft	05.02.2001
5	deleted			
6	deleted			
7	820-013, TRK-2-34	Deep Space Mission System (DSMS) Tracking System Data Archival Format	Rev B	15.12.2002
8	MEX-MRS-IGM-DS-3031	Solar Corona Analysis Software; Requirement Spec.	Draft	20.06.2003
9	MEX-ESC-IF-5003	DDID Appendix H	1.3	01.03.2002
10	MEX-MRS-IGM-IS-3019	Rosetta/Mars Express/Venus Express Archive Generation, Validation and Transfer Plan	4.0	27.08.2003
11	ME-ESC-IF-5014	Configuration Control Document FTS Configuration	A2	07.03.2003
12	820-013 TRK 2-18	ODF		
13		Media Calibration etc.		
14		PDS document Zender		
15		SPICE documentation	N0051	
16	MEX-MRS-IGM-DS-3037	ODF Level 1a to Level 1b Software Design Specifications	Draft	25.11.2003
17	JPL D-7669, Part 2	PDS Standards Reference	3.6	01.08.2003

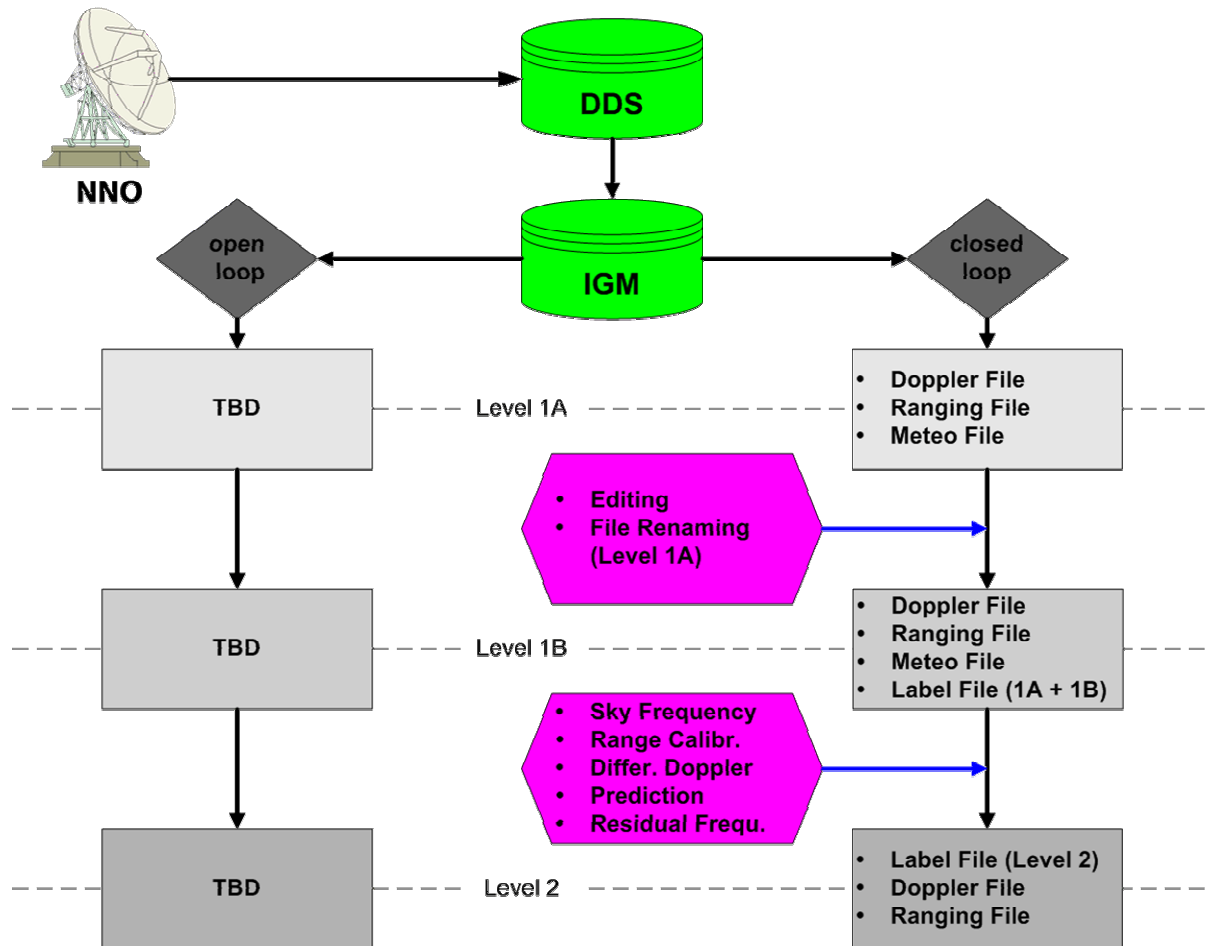


Figure 2-2: Data flow from ESA's NNO station.

3 MARS, RSI AND VERA VOLUMES AND DATASETS

ORGANIZATIONS, FORMATS AND NAME SPECIFICATIONS

3.1 DEFINITIONS AND GENERAL CONCEPT

3.1.1 Definitions

3.1.1.1 Data Product

A labeled grouping of data resulting from a scientific observation. Examples of data products include spectrum tables, and time series tables. A data product is a component of a data set.

3.1.1.2 Data Set

The accumulation of data products, secondary data, software, and documentation, that completely document and support the use of those data products. A data set is part of a data set collection.

3.1.1.3 Data Set Collection

A data set collection consists of data sets that are related by observation type, discipline, target, or time, and therefore are treated as a unit, archived and distributed as a group (set) for a specific scientific objective and analysis.

3.1.1.4 Volume

A physical unit used to store or distribute data products (e.g. a CD_ROM or DVD disk) which contain directories and files. The directories and files include documentation, software, calibration and geometry information as well as the actual science data. A volume is part of a volume set.

3.1.1.5 Volume Set

A volume set consists of one or more data volumes containing a single data set or collection of related data sets. In certain cases, the volume set can consists of only one volume.

3.1.2 Data- and Volume Set Organization

The general concept for the MaRS, RSI and VeRa Data- and Volume Set Design is shown in Figure 3.1-1.

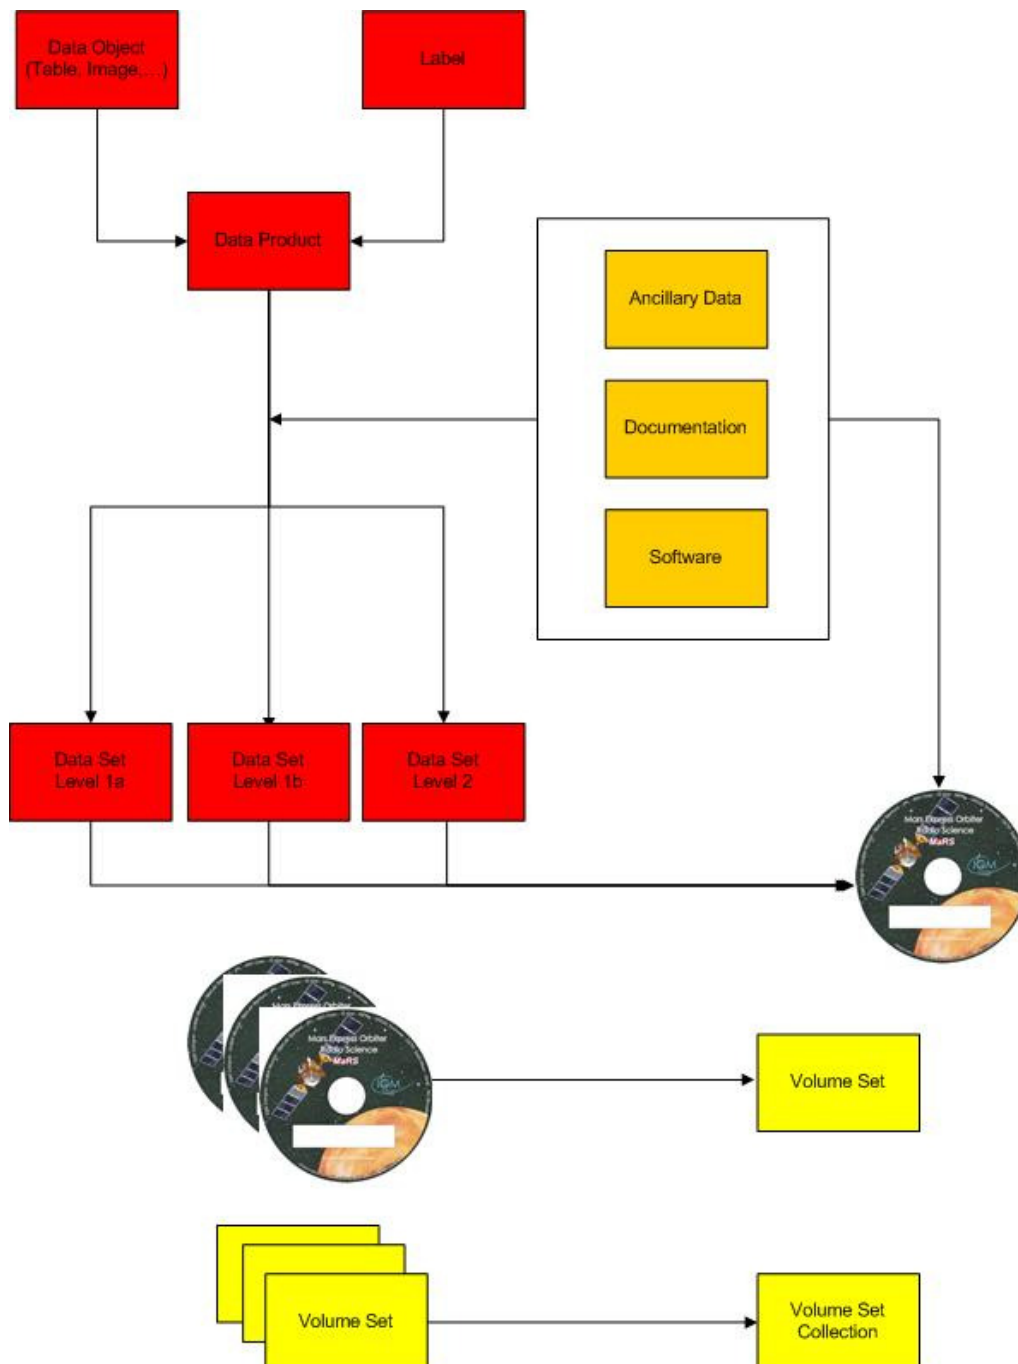


Figure 3-1: Data Set Collection, Data Sets and Data Products

3.2 VOLUME AND DATASET NAME SPECIFICATION

3.2.1 Dataset

3.2.1.1 *Dataset ID*

The Data Set ID is a unique alphanumeric identifier for the MaRS, VeRa and RSI data products. One data set corresponds to one physical data volume and both have the same four digit sequence number. See Table 3-1 for more information.

XXX-Y-ZZZ-U-VVV-NNNN-WWW

Acronym	Description	Example
XXX	Instrument Host ID	MEX ROS VEX
Y	Target ID	M (Mars) V (Venus) C (Comet Churyumov-Gerasimenko) L (asteroid Lutetia) S (asteroid Steins)
ZZZ	Instrument ID	MRS RSI VRA
U	Data level ¹ (CODMAC Level)	1 raw data/ESOC/DDS 2 edited raw data 3 calibrated data 5 derived/scientific data 1/2/3 (Data set contains raw, calibrated and Higher Level DATA)

¹ In the keyword DATA_SET_ID the CODMAC-levels are used instead of PSA-level. In all other file names and documents we keep PSA-level.

VVV	MaRS mission phases (deviate from the official MEX mission phases see below)	MCO Mission Commissioning CR1 cruise first part PRM prime mission ENT extended mission
NNNN	A 4 digit sequence number which is identical to the sequence number in the corresponding volume's VOLUME_ID	0123
WWW	Version number	V1.0

Table 3-1: Dataset ID

Examples:

MEX-M-MRS-1/2/3-PRM-1144-V1.0
ROS-C-RSI-1/2/3-MCO-0099-V2.0
VEX-V-VRA-1/2/3-MCO-0124-V1.0

It should be noted that the MaRS mission phase names used in the data_set_id **do not** correspond to the mission phase names as defined from ESA for Mars Express. However, since the radio science team tries has to archive data for Mars Express as well as for Venus Express and Rosetta, it was granted the use of spacecraft-independent mission phase names which can be used for all three missions.

For the mission_phases definition see

Acronym	Description	Timespan
For Rosetta		
NEV	Near Earth Verification	2004-03-02 at 00:00:00 UTC to 2004-05-31 at 23:59:59 UTC
CR1	Cruise 1	2004-06-01 at 00:00:00 UTC to tbd
FB1	Flyby 1	2005-03-01 at 00:00:00 UTC to 2005-03-31 at 23:59:59 UTC
AS1	Asteroid Flyby 1	2008
AS2	Asteroid Flyby 2	2010
MCO	Mission Commissioning	tbd
PRM	Prime Mission	tbd
ENT	Extended Mission	tbd

Acronym	Description	Timespan
For Venus Express		

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	25 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

NEV	Near Earth Verification	2005-10 to tbd
CR1	Cruise 1	2005-10 to 2006-03
ARR	Arrival	2006-04
MCO	Mission Commissioning	2006-04 to 2006-07
PRM	Prime Mission	2006-08-01 at 00:00:00 UTC to 2007-10-30 at 23:59:59 UTC
ENT	Extended Mission	tbd

Table

3-2

Acronym	Description	Timespan
For Mars Express		
NEV	Near Earth Verification	2003-06-02 at 00:00:00 UTC to 2003-07-31 at 23:59:59 UTC
CR1	Cruise 1	2003-08-01 at 00:00:00 UTC to 2003-12-25 at 23:59:59 UTC
MCO	Mission Commissioning	2003-12-26 at 00:00:00 UTC to 2004-06-30 at 23:59:59 UTC
PRM	Prime Mission	2004-07-01 at 00:00:00 UTC to 2005-11-30 at 23:59:59 UTC
ENT	Extended Mission	tbd

Acronym	Description	Timespan
For Rosetta		
NEV	Near Earth Verification	2004-03-02 at 00:00:00 UTC to 2004-05-31 at 23:59:59 UTC
CR1	Cruise 1	2004-06-01 at 00:00:00 UTC to tbd
FB1	Flyby 1	2005-03-01 at 00:00:00 UTC to 2005-03-31 at 23:59:59 UTC
AS1	Asteroid Flyby 1	2008
AS2	Asteroid Flyby 2	2010
MCO	Mission Commissioning	tbd
PRM	Prime Mission	tbd
ENT	Extended Mission	tbd

Acronym	Description	Timespan
---------	-------------	----------

For Venus Express		
NEV	Near Earth Verification	2005-10 to tbd
CR1	Cruise 1	2005-10 to 2006-03
ARR	Arrival	2006-04
MCO	Mission Commissioning	2006-04 to 2006-07
PRM	Prime Mission	2006-08-01 at 00:00:00 UTC to 2007-10-30 at 23:59:59 UTC
ENT	Extended Mission	tbd

Table 3-2: Mission phase description

3.2.1.2 Dataset Name

The dataset name is the full name of the dataset already identifiable by a dataset id. Dataset names shall be at most 60 characters in length and must be in upper case. See Table 3-3 for more information.

Description	Example
Instrument Host Name	MARS EXPRESS ROSETTA ORBITER VENUS EXPRESS
Target name	MARS VENUS 67P (for Comet Churyumov-Gerasimenko) LUTETIA (tbc) STEINS (tbc)
Instrument id	MRS (tbc) RSI (tbc) VRA (tbc)
MaRS mission phases (can deviate from the MEX official phase names. See above)	MISSION COMMISSIONING CRUISE 1 PRIME MISSION EXTENDED MISSION
A 4 digit sequence number which is identical to the sequence number in the corresponding volume's VOLUME_ID	0123
Version number	V1.0

Table 3-3: Dataset name

Examples:

MARS EXPRESS MARS MRS MISSION COMMISSIONING 0123 V1.0
 VENUS EXPRESS VENUS VRA PRIME MISSION 0099 V2.0
 ROSETTA ORBITER 67P RSI CRUISE 1 1144 V3.0

3.2.2 Dataset Collection

3.2.2.1 Dataset Collection ID

The data set collection ID element is a unique alphanumeric identifier for a collection of related data sets or data products. The data set collection is treated as a single unit, whose components are selected according to a specific scientific purpose. Components are related by observation type, discipline, target, time, or other classifications. See Table 3-4 for more information.

XXX_Y_ZZZ_U_VVV_IIIIIIII_TTT

Acronym	Description	Example
XXX	Instrument Host ID	MEX ROS VEX
Y	Target ID	M (Mars) V (Venus) C (Comet 67P/Churyumov-Gerasimenko) L (asteroid Lutetia) S (asteroid Steins)
ZZZ	Instrument ID	MRS RSI VRA
U	Data Level ²	1 (Raw Data of level 1a and 1b) 2 (Calibrated Data) 3-5 (Higher Level Data) 1/2/3 (Data set contains raw, calibrated and Higher Level DATA)

² In the keyword DATA_COLLECTION_ID the CODMAC-levels are used instead of PSA-level. In all other file names and documents we keep PSA-level.

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	29 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

VVV	Data Description (Acronym)	MCO commissioning CR1 cruise first part PRM prime mission ENT extended mission
IIIIIIII	Data Description (Detailed)	ROCC Occultation Profiles GRAV Gravity Data RANG Apocenter Ranging BSR Bistatic Radar Spectra PHOBOS Phobos Flyby SUPCON superior solar conjunction INFCON inferior solar conjunction
TTT	Version Number	V1.0

Table 3-4: Dataset Collection ID

Examples:

MEX-M-MRS-5-PRM-ROCC-V1.0
ROS-C-RSI-5-MCO-GRAV-V2.0
VEX-V-VRA-5-MCO-BSR-V1.0

3.2.3 Volume

3.2.3.1 *Volume ID*

The Volume ID provides a unique identifier for a single MaRS, RSI or VeRa data volume, typically a physical CD-ROM or DVD. The volume ID is also called “volume label” by the various CD-ROM recording software packages. The Volume ID is formed using an instrument identifier of 3 characters, followed by an underscore character, followed by a 4 digit sequence number. There can be several version of the same volume, if for example the archiving software changed during the archiving process or errors occurred during the initial production. This is indicated by the Volume Version ID, a string, which consists of a ‘V’ for Version followed by a sequence number indicating the revision number. Please note that the Volume_Version_ID is a independent keyword and is not part of the actual Volume ID. See Table 3-5 for more information.

XXXXXX_ZZZZ VV.V

Acronym	Description	Example
XXXXXX	Mission and Instrument ID	MEXMRS ROSRSI VEXVRA
ZZZZ	4 digit sequence number	0001
VV.V	Volume_version_ID	V1.0

Table 3-5: Volume ID

Examples:

MEXMRS_0001 V1.0
ROSRSI_0999 V1.0
VEXVRA_0508 V1.0

If a volume is redone because of errors in the initial production or because of a change in the archiving software during the archiving process, the volume ID remains the same, and the Volume Version ID will be incremented.

3.2.3.2 Volume Name

The VOLUME NAME (formatted according to Table 3-6) contains the name of the physical data volume (typically a CD-ROM or DVD) already identifiable by its VOLUME ID. Both the VOLUME ID and the VOLUME NAME are printed on the CD-ROM or DVD label (see Figure 3-2).

xxxxxx_zzzz_yyyy_ddd vv.v

Acronym	Description	Example
xxxxxx	Mission and Instrument ID	MEXMRS ROSRSI VEXVRA
zzzz	4 digit sequence number	0001
yyyy	Year of the measurement	2004
ddd	Day of year of the measurement	180
vv.v	Volume version ID	V1.0

Table 3-6: Volume name definition

Examples:

MEXMRS_0001_2003_180 V1.0
ROSRSI_0999_2016_355 V1.0
VEXVRA_0508_2008_190 V1.0

3.2.4 Volume Set

A volume set consists of a number of volumes.

3.2.4.1 *Volume Set ID*

The VOLUME SET ID identifies a data volume or a set of volumes. Volume sets are considered as a single orderable entity. VOLUME SET ID shall be at most 60 characters in length, must be in upper case and separated by underscores. See Table 3-7 for more information.

XXX_YYYY_ZZZ_WWW_UVVV

Acronym	Description	Example
XXX	Abbreviation of the country of origin	DE USA
YYYY	The government branch	UNIK NASA
ZZZ	Discipline within branch	IGM
WWW	Mission and Instrument ID	MEXMRS ROSRSI VEXVRA
UVVV	A 4 digit sequence identifier The "U" digit is be used to represent the volume set U = 0 commissioning / cruise = 1 flybys = 2 prime missions = 3 extended missions the trailing "V"s are wildcards that represent the range of volumes in the set	0099

Table 3-7: Volume Set ID

Examples (tbc):

DE_UNIK_IGM_MEXMRS_0099
USA_NASA_JPL_MEXMRS_0098

3.2.4.2 Volume Set Name

The VOLUME SET NAME provides the full, formal name of a group of data volumes containing a data set or a collection of related data sets. Volume set names shall be at most 60 characters in length and must be in upper case. Volume sets are considered as a single orderable entity. In certain cases, the volume set name can be the same as the volume name, such as when the volume set consists of only one volume.

Spacecraft	Example
Mars Express	MEX: RADIO SCIENCE OCCULTATION MEX: RADIO SCIENCE GLOBAL GRAVITY MEX: RADIO SCIENCE TARGET GRAVITY MEX: RADIO SCIENCE SOLAR CORONA MEX: RADIO SCIENCE PHOBOS FLYBY MEX: RADIO SCIENCE BISTATIC RADAR
Venus Express	tbd
Rosetta	tbd

Examples:

MEX: RADIO SCIENCE OCCULTATION
MEX: RADIO SCIENCE GLOBAL GRAVITY

Both the VOLUME SET ID and the VOLUME SET NAME are printed on the CD-ROM or DVD label (Figure 3-2).

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	34 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

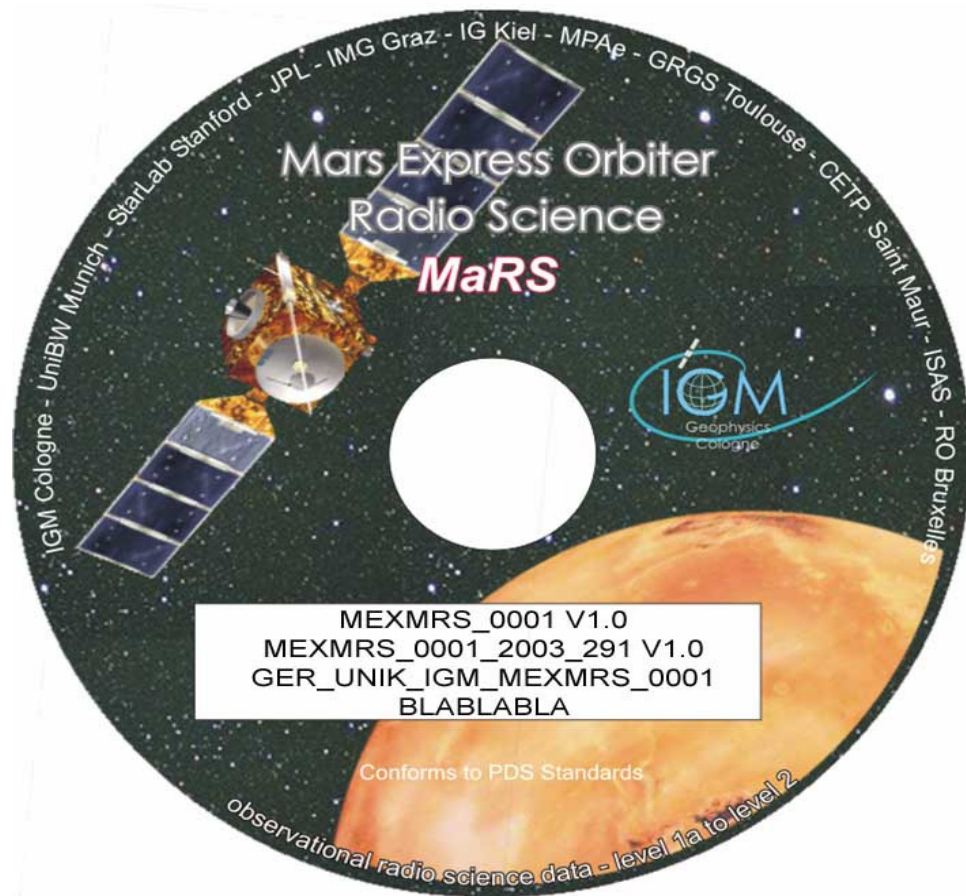


Figure 3-2: Example of a physical archive data volume (CD-ROM or DVD) with appropriate designations printed on the volume label sticker. On the sticker is printed: line 1: Volume_id + Volume_Version_ID, line 2: Volume_name, line 3: Volume_set_id, Line 4:Volume_set_name.

3.2.5 Volume Series

A volume series consists of one or more volume sets that represent data from one or more missions or campaigns.

3.2.5.1 *Volume Series Name*

The `volume_series_name` element provides a full, formal name that describes a broad categorization of data products or data sets related to a planetary body or a research campaign. See Table 3-8 for details.

Spacecraft	Example
Mars Express	MISSION TO MARS (tbc)
Venus Express	MISSION TO VENUS (tbc)
Rosetta	MISSION TO SMALL BODIES (tbc)

Table 3-8: Volume Series Name

Examples:

MISSION TO MARS (tbc)
MISSION TO VENUS (tbc)
MISSION TO SMALL BODIES (tbc)

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	36 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

Page left free

4 GENERAL FILE NAMING CONVENTION

4.1 FILE NAME FORMAT

All incoming data files will be renamed and all processed data files will be named after the following file naming convention format. The original file name of the incoming tracking data files will be stored in the according label file as *original_product_id*. See Table 4-1 for more information.

rggtttlll_sss_yyddhhmm_qq.eee

4.2 DATA FILES

Data files are:

- The DSN and IFMS radio tracking files from Level 1a to level 2
- The predicted and reconstructed Doppler and range files
- Geometry files

All Level 1a binary data files will have the extension *eee = DAT*.

Level 1a to level 2 tabulated ASCII data files will have the extension *eee = TAB* with the exception of IFMS level 1a files which will have the extension *eee = RAW*.

4.3 DESCRIPTIVE FILES

Descriptive files contain information in order to support the processing and analysis of data files. The following file types are defined as descriptive files with extension *eee =*

- *.LBL PDS label files
- *.CFG IFMS configuration
- *.AUX Auxiliary files (event files, attitude files, ESOC orbit files, UniBw products, SPICE files)
- *.TXT Information (text) files

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	38 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

Acronym	Description	Examples
r	Spacecraft (Raumsonde) name R = Rosetta M = Mars Express V = Venus Express	M
gg	Ground station ID: 00 = valid for all ground stations or independent of ground station or not feasible to appoint to a specific ground station or complex <u>DSN complex 40 Canberra</u> 34 = 34 m BWG 40 = complex 43 = 70 m 45 = 34 m HEF <u>ESA Cebreros antenna:</u> xx = 35 m <u>DSN complex 10 Goldstone:</u> 10 = complex 14 = 70 m 15 = 34 m HEF 24 = 34 m BWG 25 = 34 m BWG 26 = 34 m BWG 27 = 34 m HSBWG <u>ESA Kourou antenna</u> xx = 15 m <u>DSN complex 60 Madrid:</u> 54 = 34 m BWG 55 = 34 m BWG 60 = complex 63 = 70 m 65 = 34 m HEF <u>ESA New Norcia antenna</u> 32 = 35 m	43
tttt	data source identifier <u>Level 1a and 1b</u> ODF0 = ODF closed loop TNF0 = TNF closed-loop (L1a) T000 – T017 = TNF closed-loop (L1b) ICL1 = IFMS 1 closed loop ICL2 = IFMS 2 closed-loop ICL3 = IFMS RS closed-loop IOL3 = IFMS RS open loop R1Az = RSR block 1A open loop	TNF0

	R1Bz = RSR block 1B open loop R2Az = RSR block 2A open loop R2Bz = RSR block 2B open loop R3Az = RSR block 3A open loop R3Bz = RSR block 3B open loop z = 1...4 subchannel number ESOC = ancillary files from the ESOC DDS DSN0 = ancillary files from the DSN <u>Level 2</u> UNBW = predicted and reconstructed Doppler & range orbit files IFMS = ESA IFMS file ODF0 = DSN ODF closed-loop file T000 – T017 = DSN TNF closed-loop file RSR0 = DSN RSR open-loop file NAIF = JPL or ESTEC SPICE kernels GEOM = geometry file	
III	Data archiving level L1A = Level 1A L1B = Level 1B L02 = Level 2 L03 = Level 3	L1a
sss	data type <u>IFMS Data files level 1a:</u> D1X uncalibrated Doppler 1 X-band D1S uncalibrated Doppler 1 S-band D2X uncalibrated Doppler 2 X-band D2S uncalibrated Doppler 2 S-band C1X Doppler 1 X-band equip. calibration C1S Doppler 1 S-band equip. calibration C2X Doppler 2 X-band equip. calibration C2S Doppler 2 S-band equip. calibration RGX uncalibrated X-band range RGS uncalibrated S-band range MET meteo AG1 AGC 1 AG2 AGC 2 RCS S-band range equip. calibration RCX X-band range equip. calibration <u>DSN data files level 1a:</u> ODF original orbit files (closed-loop) RSR radio science receiver open-loop files TNF TNF file (closed-loop)	

	BRO bistatic radar 4-panel plots (browse) <u>ESOC ancillary data, Level 1a:</u> ATR attitude file, reconstructed EVT orbit event file OHC orbit file, heliocentric, cruise OMO orbit file, Marscentric, operational <u>DSN ancillary data, Level 1a:</u> DKF DSN Keyword File MON DSN monitor data NMC DSN Network Monitoring Control file SOE DSN Sequence of Events TRO DSN tropospheric calibration model MET DSN meteorological file ION DSN ionospheric calibration model <u>IFMS data files level 1b:</u> D1X uncalibrated Doppler 1 X-band D1S uncalibrated Doppler 1 S-band D2X uncalibrated Doppler 2 X-band D2S uncalibrated Doppler 2 S-band C1X Doppler 1 X-band equip. calibration C1S Doppler 1 S-band equip. calibration C2X Doppler 2 X-band equip. calibration C2S Doppler 2 S-band equip. calibration RGX uncalibrated X-band range RGS uncalibrated S-band range MET meteo AG1 AGC 1 AG2 AGC 2 RCX X-band range equip. calibration RCS S-band range equip. calibration <u>DSN ODF data files level 1b:</u> DPS S-band Doppler DPX X-band Doppler RGS uncalibrated S-band ranging file RGX uncalibrated X-band ranging file RMP uplink frequency ramp rate file <u>DSN ancillary files level 1b:</u> MET meteorological file <u>data level 2:</u> D1X calibrated Doppler 1 X-band	
--	---	--

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	41 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

	D1S calibrated Doppler 1 S-band D2X calibrated Doppler 2 X-band D2S calibrated Doppler 2 S-band RGS calibrated S-band ranging file RGX calibrated X-band ranging file RCS S-band range calibration file (IFMS) RCX X-band range calibration file (IFMS) BSR bistatic radar power spectra SRG bistatic radar surface reflection geometry file <u>orbit files level 2</u> PTW Doppler & range prediction two-way PON Doppler & range prediction one-way RTW reconstructed Doppler & range orbit file two-way RON reconstructed Doppler & range orbit file one-way LOC heliocentric state vector file <u>Constellation file Level 2:</u> MAR Mars constellation file VEN Venus constellation file P67 Churyumov-Gerasimenko constellation file <u>SPICE kernel files level 2:</u> BSP binary spacecraft/location kernel file FRM frame kernel file ORB orbit numbering file PBC predicted attitude kernel file PCK planetary constant kernel SCK spacecraft clock kernel TLS leap second kernel file <u>Science data level 3:</u> SCP solar corona science	
yy	Year	04
ddd	Day of the year	153
hhmm	Sample hour , minute (Start time)	1135
qq	Sequence or version number	01

eee	.DAT binary data files (Level 1a) .TAB ASCII data files .AUX ancillary files .CFG IFMS configuration files (Level 1b) .LBL PDS label files .TXT information files .RAW ASCII data files (Level 1a)	
-----	--	--

Table 4-1: Data file naming convention

5 RAW TRACKING DATA FILES (LEVEL 1A)

All incoming data files will be renamed and all processed data files will be named after the file naming convention format defined in section 4.1. The original file name of the incoming tracking data files will be stored in the according label file as *original_product_id*.

5.1 DEEP SPACE NETWORK TRACKING DATA

5.1.1 File names of incoming level 1a DSN raw data files

The file names of the incoming Deep Space Network (DSN) tracking data files level 1a are not specified:

Abbreviation	description
ODF	Closed-loop ODF level 1a file
TNF	Closed-loop Tracking Navigation File (TNF) Level 1a
RSR	Open-loop RSR level 1a file

5.1.2 File formats of incoming Level 1a DSN raw data files

5.1.2.1 *ODF Level 1a*

The structure of binary ODF is described in the NASA document

820-13, Rev B; TRK-2-18 ODF Orbit data File

and in the IGM documents

**MEX-MRS-IGM-DS-3037
DSN ODF (Orbit Data File) Processing Software:
Level 1a to Level 1b
Software Design Specifications**

5.1.2.2 RSR Level 1a

The RSR is a computer controlled open loop receiver that digitally records a spacecraft signal through the use of an analog to digital converter (ADC) and up to four digital filter sub-channels. The digital samples from each sub-channel are stored to disk at regular intervals in real time. In near real time the records are partitioned and formatted into a sequence of RSR SFDUs which are transmitted to JPL's Advanced Multi-Mission Operations System (AMMOS). Included in each RSR SFDU is the ancillary data necessary to reconstruct the signal represented by the recorded data samples in that SFDU.

The structure of RSR's is described in the NASA document

820-13, 0159 -Science Radio Science Receiver Standard Formatted Data Unit (SFDU)
--

And in the IGM documents

ROS-RSI-IGM-MA-3113-RSR-Read-Program-Manual MEX-MRS-IGM-MA-3026 RSR-Read-Program-Manual
--

The physical layout of the RSR SFDU is divided into five sections: the SFDU label, the header aggregation CHDO label, the primary header CHDO, the secondary header CHDO, and the data CHDO. The primary header CHDO and the secondary header CHDO together constitute the value field of the header aggregation CHDO; the header aggregation CHDO and the data CHDO together constitute the value field of the RSR SFDU.

The length of the RSR SFDU (in 8-bit bytes) is designated as N in this module. In general, the length of all items in the RSR SFDU are fixed, except for the data CHDO. The length of the data CHDO is variable and is determined by the sample rate and sample size of the recorded data. The length of the data CHDO is designated as M in this module. In any case, the total length of the RSR SFDU is easily ascertained from the length attribute in the SFDU label (total SFDU length $N =$ SFDU length attribute + 20).

5.1.2.3 Incoming ancillary files from the DSN

5.1.2.3.1 DSN meteorological calibration file

The file name and format of the DSN meteo calibration file is described in section 9.4.

5.1.2.3.2 DSN tropospheric calibration model file

The DSN tropospheric calibration file describes a model of the Earth troposphere at the antenna site. The file name and format is described in section 9.5.

5.1.2.3.3 DSN ionospheric calibration model file

The DSN tropospheric calibration file describes a model of the Earth ionosphere at the antenna site. The file name and format is described in section 9.6.

5.1.2.3.4 DSN monitor files

The file name and format of the DSN monitor file is described in section 7.6.

5.1.2.3.5 DSN Network Monitoring Control files

The file name and format of the DSN Network Monitoring Control file is described in section 7.7.

5.1.2.3.6 DSN Sequence of Events file

The file name and format of the DSN Sequence of Events file is described in section 7.8.

5.1.2.3.7 SPICE kernels

The file name and formats of the SPICE kernel files is described in section 11.

5.1.2.4 RSR Level 1a Browse Data Plots

In order to check data quality of RSR Level 1a open-loop data, Stanford University is producing a 4-panel plot. These plots are in the tbd file format.

The source identifier *tttt* is set according to the relevant RSR receiver channel and subchannel (see Tabel 4.1), the data level *///=L1A* and the data type identifier is *sss=BRO* for browse data.

rggttttL1A_BRO_yydddhmm_00.AUX

5.2 ESA – NEW NORCIA STATION (LEVEL 1A)

5.2.1 File names of incoming Level 1a IFMS files

5.2.1.1 *IFMS Level 1a incoming raw data files*

5.2.1.1.1 IFMS raw data file name format

The nominal length of a filename of the IFMS is 31 characters, and increases only in the case that more than 9999 sequence IDs are needed, or in the case of raw (uncorrected) ranging data (more information in the referenced document IFMS-to-OCC). In that case, the IFMS expands the sequence IDs length, or add a filename extension, as needed. Level 1a files will be renamed according to the file name format defined in section 4.1.

gggg_ssss_ddd_ii_tt_hhmmss_kkkk

Acronym	Description	Example
gggg	Ground station ID NN = New Norcia NN11 = IFMS-1 NN12 = IFMS-2 NN13 = IFMS-RS	NN11
ssss	Spacecraft ID MEX1 = Mars Express ROSE = Rosetta	MEX1
ddd	Day of year	108
ii	Data kind identifier OP = operational TS = test CL = calibration (range) RO = radio science (old)	OP
tt	Type of Data D1 = Doppler 1 D2 = Doppler 2 ME = Meteo RG = Ranging G1 = AGC 1 G2 = AGC 2	
hhmmss	hh = hours mm = minutes ss = seconds	145513
kkkk	Data-set sequence identification	0001

Table 5-1: File name convention for Raw IFMS-files

5.2.1.1.2 IFMS raw data file format

The structure of the IFMS tracking data files are described in the ESA document

GRST-TTC-GS-ICD-0518-TOSG
Issue/Revision No: 9.3.1
IFMS-to-OCC
Interface Control Document

5.2.1.1.3 Level 1a file name format

Since the IFMS raw data file names are not PDS compliant, a new file name is created and is formatted according to section 4.1 with the data archiving level set to *III = L1a*. It replaces the original file name which is stored in the accompanying PDS label file. The extension is set to *eee = TAB* (see also 6.2.1.3.1). The file content remains unchanged.

5.2.1.2 *Incoming ancillary files from ESOC DDS*

5.2.1.2.1 ESOC DDS file name convention

5.2.1.2.1.1 Conventions

The following conventions have been adopted in the rest of this document:

1. RMx is used where a file can be sent to either RMA or RMB
2. MMx is used where a file can be sent to either MMA or MMB
3. FDX is used where a file can be sent to either FDL or FDR

The incoming ESOC ancillary data file names follow the following format :

ffff_sssddd_Dwxyymmddhhmmss_vvvvv.eee

Placeholder	description
ffff	File type identifier ORHM = orbit file heliocentric Mars Express ORMM = orbit file marscentric Mars Express ORMF = orbit file marscentric frozen orbit ORHR = orbit file heliocentric Rosetta ATNM = attitude file nominal Mars Express ATNR = attitude file nominal Rosetta EVTM = event file Mars Express EVTf = event file frozen orbit (Mars Express) VILM = visibility file Lander Mars Express OASW = orbit and attitude data access software
sss	Data source identifier FDx = ESOC Flight Dynamics PST = ESTEC Project Science Team Mars Express (for SPICE files)
ddd	Data destination identifier MMx = Mars Express Mission System (DDS) PIX = PI Teams (for SPICE files from PST)
D	Data file
w	format identifier B = binary data A = ASCII data
x	Data type identifier _ = (underscore) orbit data P = predicted attitude data R = reconstructed attitude data
yymmddhhmmss	Start time of data in file Except for orbit files where the time stamp is replaced by Twelve (12) underscores
vvvvv	Version number
eee	Extension MEX = Mars Express

5.2.1.2.2 S/C attitude file, reconstructed

The reconstructed spacecraft attitude file for a specified time interval is described in section 7.3.

5.2.1.2.3 Orbit event file

The orbit event file contains tbd . The highest version number represents the most recent issue of that file. The file name and file format is described in section 7.4.

5.2.1.2.4 S/C orbit file during cruise, heliocentric

The spacecraft cruise orbit file is described in section 8.4

5.2.1.2.5 S/C orbit file during mission, Marscentric

The spacecraft Marscentric orbit file is described in section 8.5

5.2.1.2.6 SPICE kernels

The file name and formats of the SPICE kernel files is described in section 11.

6 PROCESSED TRACKING DATA (LEVEL 1B AND 2)

6.1 DEEP SPACE NETWORK

6.1.1 Closed-loop ODF Level 1b products

6.1.1.1 *Specifications Document*

The processing of ODF Level 1a to Level 1b products is specified in the IGM documents

MEX-MRS-IGM-DS-3037 DSN ODF (Orbit Data File) Processing Software: Level 1a to Level 1b Software Design Specifications

6.1.1.2 *Input file*

The input files for the processing software are:

- The ODF level 1a file

6.1.1.2.1 ODF level 1a file

The original ODF files have file names and formats according to section 5.1.1 and 5.1.2.

6.1.1.3 Output Level 1b products

6.1.1.3.1 File name formats

A new file name is created and is formatted according to section 4.1 with the data archiving level set to *III = L1A*. It replaces the original file name which is stored in the accompanying label file. The extension is set to *eee = TAB*.

A DSN ODF file contains usually data covering several days and from different ground stations. Therefore, a general apointment to a specific ground station cannot be done and *gg=00*.

The processed data file names of level 1b are formatted according section 4.1 with the archiving level set to *III = L1b* and *eee = TAB*.

The sequence number *qq* is not used for all DSN file types of level 1a and level 1b and is set *qq = 00*.

- For the Doppler data *sss = DPS or DPX*
- For the range data *sss = RNS or RNX*
- For the uplink frequency ramp rate data *sss = RMP*
- For the modified meteorological file *sss = MET*

New level 1a file name:

r00ODF0L1A_sss_yydddhmm_00.DAT

Level 1b file name:

r00ODF0L1B_sss_yydddhmm_00.TAB

6.1.1.3.2 Data file formats for Level 1b ODF files

6.1.1.3.2.1 File format of S-band Doppler

Table 6-1 File format of S-band Level 1b Doppler file

Column	Format	Description	Unit	Resolution
1		Sample number		
2		Time in ISO format		
3		Time in fractions of day of year	Days	10 ⁻⁹
4		Ephemeris time since 01.01.2000	Sec	μsec
5	I2	DSN station ID		
6	I1	1 = One-way 2 = two-way		
7	I1	Uplink frequency flag 0 = one-way 1 = S-band 2 = X-band 3 = Ka-band		
8	I1	Downlink frequency flag 1 = S-band 2 = X-band 3 = Ka-band		
9	I1	Data validity indicator 0 = data invalid 1 = data valid		
10		Observed S-band Doppler	Hz	μHz

6.1.1.3.2.2 File format of X-band Doppler

Table 6-2 File format of Level 1b X-band Doppler

Column	Format	Description	Unit	Resolution
1		Sample number		
2		Time in ISO format		
3		Time in fractions of day of year	Days	10 ⁻⁹
4		Ephemeris time since 01.01.2000	Sec	μsec
5		DSN station ID		
6	I1	1 = One-way 2 = two-way		
7	I1	Uplink frequency flag 0 = one-way 1 = S-band 2 = X-band 3 = Ka-band		
8	I1	Downlink frequency flag 1 = S-band 2 = X-band 3 = Ka-band		
9	I1	Data validity indicator 0 = data invalid 1 = data valid		
10		Observed X-band Doppler	Hz	μHz

6.1.1.3.2.3 File format of S-band ranging

Table 6-3File format of Level 1b S-band ranging

Column	Format	Description	Unit	Resolution
1		Sample number		
2		Time in ISO format		
3		Time in fractions of day of year	Days	10 ⁻⁹
4		Ephemeris time since 01.01.2000	Sec	μsec
5	I2	DSN station ID		
6	I1	1 = One-way 2 = two-way		
7	I1	Uplink frequency flag 0 = one-way 1 = S-band 2 = X-band 3 = Ka-band		
8	I1	Downlink frequency flag 1 = S-band 2 = X-band 3 = Ka-band		
9	I1	Data validity indicator 0 = data invalid 1 = data valid		
10		Observed S-band range	Range units	

6.1.1.3.2.4 File format of X-band ranging

Table 6-4 File format of level 1b X-band ranging

Column	Format	Description	Unit	Resolution
1		Sample number		
2		Time in ISO format		
3		Time in fractions of day of year	Days	10 ⁻⁹
4		Ephemeris time since 01.01.2000	Sec	μsec
5	I"	DSN station ID		
6	I1	1 = One-way 2 = two-way		
7	I1	Uplink frequency flag 0 = one-way 1 = S-band 2 = X-band 3 = Ka-band		
8	I1	Downlink frequency flag 1 = S-band 2 = X-band 3 = Ka-band		
9	I1	Data validity indicator 0 = data invalid 1 = data valid		
10		Observed X-band range	Range units	

6.1.1.3.2.5 File format of the uplink ramp rate file

Table 6-5: File format of uplink ramp rate file

Column	Format	Description	Unit	Resolution
1		Sample number		
2		Ramp start time Time in ISO format		
3		Ramp start time Time in fractions of day of year	Days	10^{-9}
4		Ramp start time Ephemeris time since 01.01.2000	Sec	μsec
5		Ramp stop time Time in ISO format		
6		Ramp stop time Time in fractions of day of year	Days	10^{-9}
7		Ramp stop time Ephemeris time since 01.01.2000	Sec	μsec
8		DSN Station ID		
9		Ramp Rate	Hz/s	10^{-6} Hz/s
10		Ramp Start Frequency	Hz	10^{-6} Hz

6.1.2 Closed-loop ODF Level 2 products

6.1.2.1 *Specifications document*

The processing of the ODF Level 1b to Level 2 data is specified in the IGM document

MEX-MRS-IGM-DS-3038 DSN ODF (Orbit Data File) Calibration Software: Level 1b to Level 2 Software Design Specifications

6.1.2.2 *Input file*

The input files are:

- The ODF level 1b files
 - The Doppler and range prediction file (PTW or PON)
- Or
- The Orbit reconstructed file (RTW or RON)
 - Media calibration files

6.1.2.2.1 The orbit prediction file PTW or PON

The content and format of the predict file is described in section 8.

6.1.2.2.2 The orbit reconstructed file RTW or RON

The content and format of the reconstructed orbit file is described in section 8.

6.1.2.3 ODF Level 2 products

6.1.2.3.1 ODF file name formats Level 2

The file names of the ODF output level 2 files are formatted according to section 4.1 with the archiving level identifier set to *III = L02* and the file type set to *sss = DPX* or *DPS* for X-band or S-band Doppler, respectively, or *sss = RGX* or *RGS* for calibrated X-band or S-band ranging files, respectively. The data source identifier is *ttt = ODF0*

rggODF0L02_sss_yydddhmm_00.TAB

6.1.2.3.2 ODF file formats Level 2

6.1.2.3.2.1 Calibrated Doppler files DPX and DPS

The calibrated Doppler files contain observed IFMS Doppler expressed as X-band Doppler or S-band Doppler, residual and detrended X-band or S-band Doppler (computed using the predict file), the detrended differential Doppler. If only one single frequency was used, the differential Doppler will be set to zero. The formats are shown in Table 6-6 and Table 6-7.

column	description	unit	resolution
1	Sample number		
2	Ground received time <i>as UTC in ISO format</i>		
3	Ground received time <i>as UTC in fractions of day of year starting with the first day of the year the data was recorded at 00:00.000</i>	days	10^{-10} days
4	Ground received time <i>as elapsed terrestrial barycentric dynamic time (TDB) time since noon of the first calendar day of year 2000 (12:00 1 January 2000 TDB)</i>	sec	10^{-6} sec
5	Geometric impact parameter <u>Propagation experiments:</u> approximate value of the closest approach of a downlink geometric ray path to the center of the reference body (Sun, planet, minor object). When two-way, the value is approximate average of uplink and downlink rays <u>Gravity observations:</u> geometric distance of the s/c from the center of mass of referenced body	km	10^{-3} m
6	Transmit frequency ramp reference time <i>UTC in ISO format</i> <i>The time (t_0) at which the transmitted frequency would have been f_0 using the coefficients f_0 (column 7) and df (column 8). At any time t within the interval when those coefficients are valid, the transmitted frequency f_t may be calculated from</i> $f_t = f_0 + df \cdot (t - t_0)$ <u>For DSN two-way measurements:</u> <i>f_t is the uplink frequency of the ground transmitter; the f_t photon will reach the receiver one RTLT later.</i> <u>For DSN one-way measurements:</u> <i>f_t is the downlink frequency of the spacecraft transmitter; the f_t photon will reach the receiver OWLT later. In both cases, f_0 and df may change; but f_t is always continuous, and changes in the coefficients occur only on integer seconds.</i> <u>For IFMS measurements:</u> $f_t = f_0$ <i>because $df=0$.</i>		

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	61 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

7	Transmit frequency corresponding to time in column 6 <u>Two-way coherent modes:</u> <i>Uplink frequency of ground station</i> <i>S-band order of 2100 MHz</i> <i>X-band order of 7100 MHz</i> <u>One-way mode:</u> <i>S/C transmission frequency</i> <i>X-band order of 8400 MHz</i> <i>S-band order of 2300 MHz</i>	Hz	10^{-6} Hz
8	Uplink frequency ramp rate <u>DSN two-way coherent:</u> <i>Time derivative of uplink frequency in column 7</i> <u>DSN one-way downlink mode:</u> <i>Value of spacecraft frequency drift, if known and/or meaningful; -99999.999999</i> <u>IFMS measurements:</u> <i>Ramp rate is always zero; df=0</i>	Hz/sec	10^{-6} Hz/sec
9	Observed X-band antenna frequency <i>Frequency of the signal at the terminals of the receiving antenna structure at UTC TIME columns 2 to 4 (t_r). Set to -9999999999.999999 for missing or corrupted data.</i>	Hz	10^{-6} Hz
10	Predicted X-band antenna frequency <i>Based on the ESOC reconstructed orbit file or SPICE kernels</i> <i>Expected frequency of the signal at the terminals of the receiving antenna structure at UTC TIME in columns 2 to 4 (t_r). The calculation includes geometrical effects (relative positions and motions of ground station and spacecraft, including Earth rotation and light time adjustments), tuning of both the transmitter and receiver and a model-based correction for one- or two-way (as appropriate) propagation through the Earth's atmosphere.</i>	Hz	10^{-6} Hz
11	Correction of Earth atmosphere propagation <i>Correction term for the propagation of the signal in the Earth atmosphere, based on meteorological data observed at the ground station site (MET-files)</i>	Hz	10^{-6} Hz
12	Residual calibrated X-band frequency shift <i>column 9 minus 10</i>	Hz	10^{-6} Hz
13	Received signal level <u>Closed-loop data:</u> <i>Signal level from AGC in decibels relative</i>	dBm / dB	0.1 dB

	<i>to one milliwatt (dBm).</i> <u>Open-loop (RSR):</u> <i>Signal level in decibels (dB) relative to an arbitrary reference.</i>		
14	Differential Doppler $f_s - \frac{3}{11} f_x$ Where f_s and f_x are the received S-band and X-band frequencies If BAND_NAME = X (from the label file), f_x comes from column 9 in this table and f_s comes from column 9 in the file identified by SOURCE_ID (from the label file). If BAND_NAME = S (from the label file), f_s comes from column 9 in this table and f_x comes from column 9 in the file identified by SOURCE_ID (from the label file). if either band is not available, this column is set "-99999.999"	Hz	10^{-6} Hz
15	standard deviation of the observed antenna frequency X-band in column 9 (open-loop only) for closed-loop this value is set "-99999.999"	Hz	10^{-6} Hz
16	Received X-band signal quality (open-loop only) Ratio of observed received signal strength to the statistical standard deviation of the measurement, column 15 divided by column 19 For closed-loop this value is set "-999.9"	dB	0.1 dB
17	standard deviation of received signal level at X-band (open-loop) A statistical measure of the error in determining SIGNAL LEVEL (column 15) based on fit of a data spectrum to a sinc function. Uses the same arbitrary scale factor as column 15; units of dB. for closed-loop this is set "-999.9"	dB	0.1 dB

Table 6-6: : format of the level 2 X-band Doppler file.

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	63 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

column	description	unit	resolution
1	Sample number		
2	Ground received time <i>as UTC in ISO format</i>		
3	Ground received time <i>as UTC in fractions of day of year starting with the first day of the year the data was recorded at 00:00.000</i>	days	10^{-10} days
4	Ground received time <i>as elapsed terrestrial barycentric dynamic time (TDB) time since noon of the first calendar day of year 2000 (12:00 1 January 2000 TDB)</i>	sec	10^{-6} sec
5	Geometric impact parameter <u>Propagation experiments:</u> approximate value of the closest approach of a downlink geometric ray path to the center of the reference body (Sun, planet, minor object). When two-way, the value is approximate average of uplink and downlink rays <u>Gravity observations:</u> geometric distance of the s/c from the center of mass of referenced body	km	10^{-3} m
6	Transmit frequency ramp reference time <i>UTC in ISO format</i> <i>The time (t_0) at which the transmitted frequency would have been f_0 using the coefficients f_0 (column 7) and df (column 8). At any time t within the interval when those coefficients are valid, the transmitted frequency f_t may be calculated from</i> $f_t = f_0 + df \cdot (t - t_0)$ <u>For DSN two-way measurements:</u> f_t is the uplink frequency of the ground transmitter; the f_t photon will reach the receiver one RTLT later. <u>For DSN one-way measurements:</u> f_t is the downlink frequency of the spacecraft transmitter; the f_t photon will reach the receiver OWLT later. In both cases, f_0 and df may change; but f_t is always continuous, and changes in the coefficients occur only on integer seconds. <u>For IFMS measurements:</u> $f_t = f_0$ <i>because $df=0$.</i>		

7	Transmitted frequency corresponding to time in column 6 <u>Two-way coherent modes:</u> <i>Uplink frequency of ground station</i> <i>S-band order of 2100 MHz</i> <i>X-band order of 7100 MHz</i> <u>One-way mode:</u> <i>S/C transmission frequency</i> <i>X-band order of 8400 MHz</i> <i>S-band order of 2300 MHz</i>	Hz	10^{-6} Hz
8	Uplink frequency ramp rate <u>DSN two-way coherent:</u> <i>Time derivative of uplink frequency in column 7</i> <u>DSN one-way downlink mode:</u> <i>Value of spacecraft frequency drift, if known and/or meaningful; -99999.999999</i> <u>IFMS measurements:</u> <i>Ramp rate is always zero; df=0</i>	Hz/sec	10^{-6} Hz/sec
9	Observed S-band antenna frequency <i>Frequency of the signal at the terminals of the receiving antenna structure at UTC TIME columns 2 to 4 (t_r). Set to -9999999999.999999 for missing or corrupted data.</i>	Hz	10^{-6} Hz
10	Predicted S-band antenna frequency <i>Based on the ESOC reconstructed orbit file or SPICE kernels</i> <i>Expected frequency of the signal at the terminals of the receiving antenna structure at UTC TIME in columns 2 to 4 (t_r). The calculation includes geometrical effects (relative positions and motions of ground station and spacecraft, including Earth rotation and light time adjustments), tuning of both the transmitter and receiver and a model-based correction for one- or two-way (as appropriate) propagation through the Earth's atmosphere.</i>	Hz	10^{-6} Hz
11	Correction of Earth atmosphere propagation <i>Correction term for the propagation of the signal in the Earth atmosphere and ionosphere, based on meteorological data observed at the ground station site (MET-files)</i>	Hz	10^{-6} Hz
12	Residual calibrated X-band frequency shift <i>column 9 minus 10</i>	Hz	10^{-6} Hz
13	Received S-band signal level	dBm /	0.1 dB

	<u>Closed-loop data:</u> Signal level from AGC in decibels relative to one milliwatt (dBm). <u>Open-loop (RSR):</u> Signal level in decibels (dB) relative to an arbitrary reference.	dB	
14	Differential Doppler $f_s - \frac{3}{11} f_x$ Where f_s and f_x are the received S-band and X-band frequencies If BAND_NAME = X (from the label file), f_x comes from column 9 in this table and f_s comes from column 9 in the file identified by SOURCE_ID (from the label file). If BAND_NAME = S (from the label file), f_s comes from column 9 in this table and f_x comes from column 9 in the file identified by SOURCE_ID (from the label file). if either band is not available, this column is set "-99999.999"	Hz	10^{-6} Hz
15	standard deviation of the observed antenna frequency S-band in column 9 (open-loop only) for closed-loop this value is set "-99999.999"	Hz	10^{-6} Hz
16	Received S-band signal quality (open-loop only) Ratio of observed received signal strength to the statistical standard deviation of the measurement, column 15 divided by column 19 For closed-loop this value is set "-999.9"	dB	0.1 dB
17	standard deviation of received signal level at S-band (open-loop) A statistical measure of the error in determining SIGNAL LEVEL (column 15) based on fit of a data spectrum to a sinc function. Uses the same arbitrary scale factor as column 15; units of dB. for closed-loop this is set "-999.9"	dB	0.1 dB

Table 6-7: format of the level 2 S-band Doppler file.

6.1.2.3.2.2 Calibrated ranging files RGX and RGS

The level 2 ranging file contains the observed TWLT at X-band or S-band, the calibrated TWLT at X-band or S-band, the TWLT delay at X-band or S-band and the differential TWLT. If only one frequency was used, the differential TWLT is set to -99999.9. The formats are shown in Table 6-8 and Table 6-9.

column	description	unit	resolution
1	Sample number		
2	Ground received time <i>as UTC in ISO format</i>		
3	Ground received time <i>as UTC in fractions of day of year starting with the first day of the year the data was recorded at 00:00.000</i>	days	10 ⁻⁹ days
4	Ground received time <i>as elapsed terrestrial barycentric dynamic time (TDB) time since noon of the first calendar day of year 2000 (12:00 1 January 2000 TDB)</i>	sec	10 ⁻⁶ sec
5	Geometric impact parameter <u>Propagation experiments:</u> approximate value of the closest approach of a downlink geometric ray path to the center of the reference body (Sun, planet, minor object). When two-way, the value is approximate average of uplink and downlink rays <u>Gravity observations:</u> geometric distance of the s/c from the center of mass of referenced body	km	10 ⁻³ m
5	Observed TWLT X-band	Seconds	0.1 nsec
6	calibrated TWLT X-band <i>corrected for the propagation in the Earth atmosphere, ionosphere and interplanetary plasma propagation</i>	Seconds	0.1 nsec
7	TWLT delay X-band <i>Total correction applied to column 6</i>	nsec	0.1 nsec
8	Differential TWLT <i>Computed from the S-band and X-band calibrated range in column 6</i> $\tau_S - \tau_X$ <i>If neither S-band or X-band is available the value is set to -99999.9</i>	nsec	0.1nsec

Table 6-8: format of the level 2 X-band calibrated ranging file

column	description	unit	resolution
1	Sample number		
2	Ground received time <i>as UTC in ISO format</i>		
3	Ground received time <i>as UTC in fractions of day of year starting with the first day of the year the data was recorded at 00:00.000</i>	days	10 ⁻⁹ days
4	Ground received time <i>as elapsed terrestrial barycentric dynamic time (TDB) time since noon of the first calendar day of year 2000 (12:00 1 January 2000 TDB)</i>	sec	10 ⁻⁶ sec
5	Geometric impact parameter <i>Propagation experiments: approximate value of the closest approach of a downlink geometric ray path to the center of the reference body (Sun, planet, minor object). When two-way, the value is approximate average of uplink and downlink rays</i> <i>Gravity observations: geometric distance of the s/c from the center of mass of referenced body</i>	km	10 ⁻³ m
5	Observed TWLT S-band	Seconds	0.1 nsec
6	calibrated TWLT S-band <i>corrected for the propagation in the Earth atmosphere, ionosphere and interplanetary plasma propagation</i>	Seconds	0.1 nsec
7	TWLT delay S-band <i>Total correction applied to column 6</i>	nsec	0.1 nsec
8	Differential TWLT <i>Computed from the S-band and X-band calibrated range in column 6</i> $\tau_s - \tau_x$ <i>If neither S-band or X-band is available the value is set to -99999.9</i>	nsec	0.1nsec

Table 6-9: format of the level 2 S-band calibrated ranging file

6.1.3 Open-loop RSR Level 2

6.1.3.1 *Specification Document*

tbd

6.1.3.2 *Open-loop RSR Level 2 products*

6.1.3.2.1 Open-loop Doppler file products Level 2

6.1.3.2.1.1 Open-loop Doppler File name format

The file names of the Doppler RSR level 2 products are formatted according to section 4.1 with the archiving level identifier set to *III = L02* and the file type set to *sss = DPS or DPX*. The data source identifier is *tttt = RSR0*

rggRSR0L02_sss_yydddhmm_00.TAB

6.1.3.2.1.2 Open-loop Doppler File formats

See Table 6-6 and Table 6-7.

6.1.3.2.2 Bistatic Radar products

6.1.3.2.2.1 File name format

The file names of the bistatic radar RSR level 2 products are formatted according to section 4.1 with the archiving level identifier set to *III = L02* and the file type set to *sss = BSR or SRG*, for the power spectra and the surface reflection geometry file, respectively . The data source identifier is *tttt = RSR0*.

Bistatic Radar power spectra:

rggRSR0L02_BSR_yydddhmm_00.TAB

The associated surface reflection geometry file:

rggRSR0L02_SRG_yydddhmm_00.TAB

6.1.3.2.2.2 Bistatic Radar products level 2: Power Spectra

The BSR spectra contain as a function of spectral frequency the power of the right-handed circular polarized (RCP) and the left-handed circular polarized (LCP) signals at X-band and S-band, and the real and imaginary components of the RCP and LCP cross spectra again at both frequency bands.

If the polarization information for a frequency band is not available, then the respective columns contain zeros.

Column	Description	Unit	Resolution/ format
1	Spectrum number		I3
2	Center time of spectrum	spm	microseconds
3	Number of sample in spectrum		I5
4	Spectral frequency	Hz	
5	X-band RCP power	W	1x,E12.5
6	X-band LCP power	W	1x,E12.5
7	S-band RCP power	W	1x,E12.5
8	S-band LCP power	W	1x,E12.5
9	X-band RCP/LCP cross spectral power real component	W	1x,E12.5
10	X-band RCP/LCP cross spectral power imaginary component	W	1x,E12.5
11	S-band RCP/LCP cross spectral power real component	W	1x,E12.5
12	S-band RCP/LCP cross spectral power imaginary component	W	1x,E12.5

Table 6-10: BSR spectra file format

6.1.3.2.2.3 Bistatic Radar products level 2: Surface Reflection Geometry File

tbd

6.2 NEW NORCIA STATION (LEVEL 1B AND LEVEL 2)

6.2.1 Closed-loop IFMS level 1b products

6.2.1.1 *Specifications document*

The processing of the IFMS Level 1a to Level 1b data is specified in the document

MEX-MRS-IGM-MA-3017 Issue 1.0 IFMS-Read-Program User Manual
--

6.2.1.2 *Input files*

The input files are:

- The incoming IFMS level 1a files

6.2.1.2.1 IFMS level 1a files

The original IFMS files have file names and formats according to section 5.2.1.

6.2.1.3 Output IFMS Level 1b products

6.2.1.3.1 File name formats

Since the incoming raw IFMS files are not PDS compliant, for each file a new file name is created and is formatted according to section 4.1 with the data archiving level set to */// = L1A* and file ending set to *.eee = .RAW*. It replaces the original file name which is stored in the accompanying label file. The data source identifier is set to *tttt = ICL1, ICL2, ICL3 or IOL3*.

New level 1a file name:

rggttttL1A_sss_yydddhmm_qq.RAW

PDS label file names level 1a:

rggttttL1A_sss_yydddhmm_qq.LBL

The processed data file names of level 1b are formatted according section 4.1 with the archiving level identifier set to */// = L1B*. For each Level 1a data file three files are generated:

Level 1b data file name:

rggttttL1B_sss_yydddhmm_qq.TAB

IFMS configuration file name level 1b:

rggttttL1B_sss_yydddhmm_qq.CFG

PDS label file names level 1b:

rggttttL1B_sss_yydddhmm_qq.LBL

The label file contains the description of the *.TAB* as well as of the *.CFG* file.

6.2.1.3.2 Data file formats

The program will produce up to fifteen different level 1b data files along with their respective label files according to PDS standards. The data files contain Doppler data, ranging data, meteorological data and AGC data. The file type identifier *sss* is set to:

<i>D1S</i>	<i>D2S</i>	<i>RGS</i>	<i>AG1</i>	<i>RCS</i>	<i>C1S</i>	<i>C2S</i>
<i>D1X</i>	<i>D2X</i>	<i>RGX</i>	<i>AG2</i>	<i>RCX</i>	<i>C2X</i>	<i>C2X</i>
<i>MET</i>						

Furthermore, IFMS configuration files are created which contain the actual configuration of the respective IFMS (*tttt* = *ICL1*, *ICL2*, *ICL3* or *IOL3*). The extension of the configuration files are *eee* = *CFG*, they describe data files of file type *sss*.

6.2.1.3.2.1 The Doppler Files *D1S*, *D1X*, *D2S*, *D2X*

The program will read the information of the level 1a Doppler files and will produce Doppler files of level 1b containing data described in Table 6-11.

Column	description	Unit
1	sample number	
2	Ground received time as UTC in ISO format	
3	Ground received time as UTC in fractions of day of year starting with the first day of the year the data was recorded in at 00:00.000	days
4	Ground received time in Ephemeris time beginning at J2000 (12 h 1 January 2000 TBD)	s
5	Interval count	
6	Unwrapped phase	cycles
7	Spurious carrier	(Flag 0 or 1)
8	Delta delay	seconds

Table 6-11: format of IFMS level 1b doppler files

6.2.1.3.2.2 The Ranging Files RGX, RGS

The program will read the information of the level 1a ranging file and will produce a level 1b ranging file containing data described in Table 6-12.

Column	description	Unit
1	Sample number	
2	Ground received time as UTC in ISO format	
3	Ground received time as UTC in fractions of day of year starting with the first day of the year the data was recorded in at 00:00.000	days
4	Ground received time as Ephemeris time beginning at J2000 (12 h 1 January 2000 TBD)	s
5	Delay	Seconds
6	Current Code	(Number 0..24)
7	Ambiguity Done	(Flag 0 or 1)
8	Spurious Carrier	(Flag 0 or 1)
9	Spurious Tone	(Flag 0 or 1)
10	Previous Correlation	(Flag 0 or 1)
11	Estimated Doppler Effect or more precisely: minus relative velocity of s/c over c	
12	DSP – Status	(Flag 0 or 1)
13	DSP – Integrated Tone	dB
14	DSP – Integrated Code	
15	DSP – Phase Error	cycles
16	DSP Toneloop SNR	dB
17	DSP Modulation Index	rad

Table 6-12: format of the IFMS level 1b ranging files

6.2.1.3.2.3 The Meteorological File MET

The program will read the information of the level 1a meteorological file and will produce a level 1b meteorological file for Earth atmosphere calibration. See section 9.4 for file name and file format description.

6.2.1.3.2.4 The AGC files AG1 and AG2

The program will read the information of the level 1a AGC files and will produce the level 1b AGC files containing data described in Table 6-13.

Colum	Description	Unit
1	Sample number	N/A
2	Ground received time as UTC in ISO format	
3	UTC sample time in fractions of day of year starting with the first day of the year the data was recorded in at 00:00.000	days
4	Ephemeris time beginning at J2000 (12 h 1 January 2000 TBD)	s
5	Carrier Level	dBm
6	Polarisation Angle of received carrier signal	cycles

Table 6-13 format of IFMS level 1b AGC files

6.2.1.3.2.5 The range calibration file RCX or RCS

See section 9.1

6.2.1.3.2.6 The configuration files CFG

See section 7.2

6.2.1.3.2.7 The doppler calibration files C1X, C1S, C2X, C2S

See section 9.3

6.2.2 Closed-loop IFMS level 2 products

6.2.2.1 *Specifications document*

The IFMS level 2 processing is specified in the documents

MEX-MRS-IGM-DS-3035
IFMS Doppler Processing Software: Level 1a to Level 2

MEX-MRS-IGM-DS-3036
IFMS Ranging Processing Software: Level 1a to Level 2

6.2.2.2 *Input files*

The input files are:

- The IFMS level 1a files (D1S,D1X, D2S,D2X, RGX,RGS)
- The orbit reconstructed file (RWT or RON)
- The range calibration file (RCX or RCS)
- Meteorological file
- AGC file
- Klobuchar coefficients for Earth ionosphere calibration
- Spacecraft orbit SPICE kernels

6.2.2.2.1 The orbit reconstructed file RTW or RON

The content and format of the predict file is described in section 8.

6.2.2.2.2 The range calibration file RCX or RCS

The content and format of the range calibration file RCX and RCS is described in section 9

6.2.2.3 Output IFMS Level 2 products

6.2.2.3.1 File name formats

The file names of the IFMS output level 2 files are formatted according to section 4.1 with the archiving level identifier set to *III = L02* and the file source identifier set to *tttt = IFMS*. The file type is set to *sss = D1X or D2X* for X-band Doppler or *sss = D1S or D2S* for S-band Doppler, respectively, or *sss = RGX or RGS* for calibrated X-band or S-band ranging files, respectively.

r32IFMSL02_sss_yydddhmm_qq.TAB

6.2.2.3.2 Data file formats Level 2

6.2.2.3.2.1 Calibrated Doppler files D1X, D1S, D2X, D2S

The calibrated Doppler files contain observed IFMS sky frequency, X-band Doppler and S-band Doppler frequency shift, residual (computed using the predict file), and the differential Doppler. If only a single downlink frequency was used, a differential Doppler cannot be computed and was set to zero in the output file. The formats are shown in Table 6-6 and Table 6-7.

6.2.2.3.2.2 Calibrated ranging files RGX and RGS

The level 2 ranging file contains the observed TWLT at X-band or S-band, the calibrated TWLT at X-band or S-band, the TWLT delay at X-band or S-band and the differential TWLT. If only one frequency was used, the differential TWLT is set to -99999.9. The formats are shown in Table 6-8 and Table 6-9.

7 FORMAT OF DESCRIPTIVE FILES

7.1 PDS LABEL FILES

7.1.1 File name

The extension is set to *eee = LBL*.

rggtttlll_sss_yyddhhmm_qq.LBL

7.1.2 File Format

All label files consist of a header and a description part of the format of the data file.

7.1.2.1 Header of label files

The header of a label file contains general information about the data file like PDS version id, record type and so on. See Table 7-1 for a detailed description.

7.1.2.2 Description part of label files

The description part of a label file contains information about the format and the data in every column of the according data file.

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	80 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

Line	Name	Description
1	Pds_version_id	Version number of the PDS standard document
2	Data_set_id	Identifier for data set or data product
3	Processing_level_id	Identifier of a set of data according to the CODMAC standard
4	Target_name	Identifies a target: MARS VENUS P67 / CHURYUMOV-GERASIMENKO
5	Instrument_host_name	Full name of the host on which an instrument is based MARS EXPRESS VENUS EXPRESS ROSETTA-ORBITER
6	instrument_host_id	The instrument_host_id element provides a unique identifier for the host where an instrument is located. This host can be either an earth base or a spacecraft MEX VEX ROS
7	Instrument_name	Full name of an instrument MARS EXPRESS ORBITER RADIO SCIENCE VENUS EXPRESS RADIO SCIENCE ROSETTA RADIO SCIENCE INVESTIGATIONS
8	Instrument_id	Acronym which identifies the instrument MRS VRA RSI
9	Producer_id	Name for the producer of the dataset IFMS ESA/NNO DSN IGM COLOGNE JPL
10	DSN_station_number	DSN station number
11	Product_creation_time	UTC system format time when a product was created
12	Standard_data_product_id	Type of a data product within a data set TNF ODF RSR IFMS1, IFMS2, IFMS3
13	Product_id	Permanent, unique identifier of the data product
14	Source_product_id	The source_product_id data element identifies a product used as input to create a new product.
15	Software_name	Name of data processing software (Not available in

ROSETTA Radio Science Investigations RSI MARS EXPRESS Radio Science Experiment MaRS VENUS EXPRESS Radio Science VeRa Document name : File Naming Convention			
Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	81 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

		level 1a)
--	--	-----------

Table 7-1: Description of the header of label files

7.2 IFMS CONFIGURATION FILES

The configuration files contain the configuration or Active Table of each recording IFMS for each data type.

7.2.1 File name

The file type description is set to *sss* of the to be described IFMS data file and the extension is *eee = CFG*.

r32tttL1B_sss_yyddhhmm_qq.CFG

sss	Description
D1S	uncalibrated Doppler 1 data file S-band
D1X	uncalibrated Doppler 1 data file X-band
D2S	uncalibrated Doppler 2 data file S-band
D2X	uncalibrated Doppler 2 data file X-band
C1S	Doppler 1 calibration data file S-band
C1X	Doppler 1 calibration data file X-band
C2S	Doppler 2 calibration data file S-band
C2X	Doppler 2 calibration data file X-band
MET	Meteo file
RGS	uncalibrated S-band range data file
RGX	uncalibrated X-band range data file
RCS	S-band range calibration data file
RCX	X-band range calibration data file

7.2.2 File format

All configuration files are of the same format. See Appendix 12.1 for details.

7.3 ESOC ANCILLIARY FILES

7.3.1 Spacecraft Attitude Data; reconstructed

7.3.1.1 File name

Original file name:

ATNM_FDxMMx_DARyymmddhhmmss_vvvvv.MEX

Where

	description
ATNM	Attitude file Acronym as described in [11]
FDxMMx / FDxRMx	File source: ESOC Flight Dynamics (FDS) for the Mars Express Mission Control System (MMS) / for the Rosetta Mission Control System (RMS)
D	Data
A	ASCII data
R	Reconstructed data
yymmddhhmmss	Date specifies start time of the data in the file
vvvvv	Version number
MEX	Mars Express file

New MaRS and PDS compliant file name:

r00ESOCL1A_ATR_yydddhmm_vv.AUX

The data source identifier is set to *tttt* = *ESOC*, the data type identifier is set to *sss* = *ATR* for reconstructed attitude data. The sequence number is equal to the version number of the original file name. The extension is set to *eee* = *AUX*.

7.3.1.2 File format

The file format is described in the DDID Appendix H [referenced document 9]. A copy of the latest DDID Appendix H can be found on the most recent Data Archive Volumes. The structure of the Data Archive Volume is described in [10].

7.3.2 Spacecraft orbit Event File

7.3.2.1 *File name*

Original file name:

EVTM_FDxMMx_DA_____vvvvv.MEX

Where

	description
EVTM	Event file Acronym as described in [11]
FDxMMx / FDxRMx	File source: ESOC Flight Dynamics (FDS) for the Mars Express Mission Control System (MMS) / for the Rosetta Mission Control System (RMS)
D	Data
A	ASCII data
_	Blank (underscore)
_____	12x underscore no specific start date given
_vvvvv	Version number
MEX	Mars Express file

New MaRS and PDS compliant file name:

r00ESOCL1A_EVT_yyddhhmm_vv.AUX

The data source identifier is set to *tttt* = *ESOC*, the data type identifier is set to *sss* = *EVT* for reconstructed attitude data. The sequence number is equal to the version number of the original file name. The extension is set to *eee* = *AUX*.

The time information in the MaRS file name will be set to the creation date of the event file.

7.3.2.2 *File format*

The file format is described in the DDID Appendix H [referenced document 9]. A copy of the latest DDID Appendix H can be found on the most recent Data Archive Volumes. The structure of the Data Archive Volume is described in [10].

7.4 INFORMATION FILES

Information files contain collected information in plain ASCII (e.g. letters, emails, tables, notes, etc.) with regard to the respective data file to support analysis and interpretation.

7.4.1 File name

The extension is set to *eee = TXT*

r32ttttL1B_sss_yydddhmm_qq.TXT

7.4.2 File format

Plain ASCII text.

7.5 DSN MONITOR FILE

7.5.1 Specification document

none

7.5.2 File name

The file type description is set to *sss=MON*, the data source identifier is *ttt=DSN0* and the extension is *eee=TXT*.

rggDSN0L1A_MON_yydddhmm_qq.TXT

7.5.3 File format

none; ASCII file

7.6 DSN NETWORK MONITORING CONTROL FILE

7.6.1 Specification document

none

7.6.2 File name

The file type description is set to *sss=NMIC*, the data source identifier is *ttd=DSN0* and the extension is *eee=TXT*.

rggDSN0L1A_NMIC_yydddhmm_qq.TXT

7.6.3 File format

none; ASCII file

7.7 DSN SEQUENCE OF EVENTS FILE

7.7.1 Specification document

none

7.7.2 File name

The file type description is set to *sss=SOE*, the data source identifier is *ttt=DSN0* and the extension is *eee=TXT*.

rggDSN0L1A_SOE_yydddhmm_qq.TXT

7.7.3 File format

None; ASCII file

8 ORBIT FILES

8.1 DOPPLER AND RANGE PREDICTION FILE

8.1.1 Specification document

MEX-MRS-IGM-DS-3039

Radio Science Predicted and Reconstructed Orbit Data: Specifications

The Doppler and range predict file is provided by UniBwM and contains predicted Doppler and range for a given time span for one-way and two-way data.

8.1.2 File name

The predict file name is formatted according to section 4.1 by setting the archiving level to $III = L02$ and the file type to $sss = PTW$ or $sss = PON$ for two-way or one-way data, respectively. The file source is set to $tttt = UNBW$. The predict file is always relative to a given ground station (topocentric).

rggUNBWL02_sss_yydddhmm_qq.TAB

8.1.3 File format

8.1.3.1 Two-way Doppler and range predict files

column	description	unit	resolution
1	sample number		
2	year (t_{TWRD})		
3	UTC Time stamp in ISO format (t_{TWRD})		
4	UTC Time in Fractions of DOY (t_{TWRD})	days	10^{-7} days
5	Ephemeris Time since J2000 (12 h 1 January 2000 TBD) (t_{TWRD})	days	Integer
6	TWUL Doppler $\frac{V_{LOS,UL}}{c}$		10^{-14}
7	TWDL Doppler $\frac{V_{LOS,DL}}{c}$		10^{-14}
8	TWUL Doppler $\frac{V_{LOS,UL}}{c}$ considering gravity fields degree and order $l,m \leq 10$		10^{-14}
9	TWDL Doppler $\frac{V_{LOS,DL}}{c}$ considering gravity fields degree and order $l,m \leq 10$		10^{-14}

10	TW geom. range ($r_{SC}(t_{TWE}) - r_{GS}(t_{TWE})$)	km	0.1 km
11	TW range ($(r_{SC}(t_{TWRU}) - r_{GS}(t_{TWE})) + ((r_{GS}(t_{TWRD}) - r_{SC}(t_{TWRU}))$)	km	0.1 km
12	DLLT ($t_{TWRU} - t_{TWRD}$)	seconds	nsec
13	TWLT ($t_{TWE} - t_{TWRD}$)	seconds	nsec

Table 8-1: Two-way Doppler and range prediction file format

8.1.3.2 One-way Doppler and range predict files

column	description	unit	resolution
1	sample number		
2	Year (t_{OWR})		
3	UTC Time stamp in ISO format (t_{TWRD})		
4	UTC Time in Fractions of DOY (t_{TWRD})	days	10^{-7} days
5	Ephemeris Time since J2000 (12 h 1 January 2000 TBD) (t_{TWRD})	days	Integer
6	OW geom. range ($r_{SC}(t_{OWE}) - r_{GS}(t_{OWE})$)		
7	One-Way Doppler $\frac{v_{LOS}}{c}$		10^{-14}
8	One-Way Doppler $\frac{v_{LOS}}{c}$ considering gravity fields degree and order l,m <= 10		10^{-14}
9	OWL ($t_{OWR} - t_{OWE}$)	seconds	nsec

Table 8-2: One-way Doppler and range prediction file format

Nomenclature:

OW one way link
TW two way link
UL uplink
DL downlink
c speed of light ($c = 299,792,458$ m/s)
LT Light time
 v_{LOS} relative velocity between ground station and S/C (in the line of sight)
 $r_{SC}(t)$ Position of S/C at time t
 $r_{GS}(t)$ Position of ground station at time t

 t_{OWE} Time at emission of signal at S/C (one-way calculation)
 t_{OWR} Time at reception of signal at ground station (one-way calculation)

 t_{TWE} Time at emission of signal at ground station (two-way calculation)
 t_{TWRU} Time at reception of signal at S/C (two-way calculation - uplink)
 t_{TWRD} Time at reception of signal at ground station (two-way calculation - downlink)

8.2 RECONSTRUCTED DOPPLER & RANGE ORBIT FILE

The Doppler and range reconstructed orbit file is provided by UniBwM and contains post-observation reconstructed Doppler and range for a given time span for one-way and two-way data.

8.2.1 File name

The orbit file name is formatted according to section 4.1 by setting the archiving level to $lll = L02$ and the file type to $sss = RTW$ or $sss = RON$ for two-way or one-way data, respectively. The file type is set to $ttt = ORB$. The predict file is always relative to a given ground station (topocentric).

rggUNBWL02_sss_yydddhmm_qq.TAB

8.2.2 File format

8.2.2.1 Two-way Doppler and range reconstructed orbit files

column	description	unit	resolution
1	sample number		
2	year (t_{TWRD})		
3	UTC Time stamp in ISO format (t_{TWRD})		
4	UTC Time in Fractions of DOY (t_{TWRD})	days	10^{-7} days
5	Ephemeris Time since J2000 (12 h 1 January 2000 TBD) (t_{TWRD})	days	Integer
6	TWUL Doppler $\frac{V_{LOS,UL}}{c}$		10^{-14}
7	TWDL Doppler $\frac{V_{LOS,DL}}{c}$		10^{-14}
8	TWUL Doppler $\frac{V_{LOS,UL}}{c}$ considering gravity fields degree and order $l,m \leq 10$		10^{-14}
9	TWDL Doppler $\frac{V_{LOS,DL}}{c}$ considering gravity fields degree and order $l,m \leq 10$		10^{-14}
10	TW geom. range ($r_{SC}(t_{TWE}) - r_{GS}(t_{TWE})$)	km	0.1 km
11	TW range ($(r_{SC}(t_{TWRU}) - r_{GS}(t_{TWE})) + ((r_{GS}(t_{TWRD}) - r_{SC}(t_{TWRU}))$)	km	0.1 km
12	DLLT ($t_{TWRU} - t_{TWRD}$)	seconds	nsec
13	TWLT ($t_{TWE} - t_{TWRD}$)	seconds	nsec

Table 8-3: File format description of Two-way Doppler reconstructed files.

8.2.2.2 One-way Doppler and range reconstructed orbit files

column	description	unit	resolution
1	sample number		
2	Year (t_{OWR})		
3	UTC Time stamp in ISO format (t_{TWRD})		
4	UTC Time in Fractions of DOY (t_{TWRD})	days	10^{-7} days
5	Ephemeris Time since J2000 (12 h 1 January 2000 TBD) (t_{TWRD})	days	Integer
6	OW geom. range ($r_{SC}(t_{OWE}) - r_{GS}(t_{OWE})$)		
7	One-Way Doppler $\frac{v_{LOS}}{c}$		10^{-14}
8	One-Way Doppler $\frac{v_{LOS}}{c}$ considering gravity fields degree and order l,m <= 10		10^{-14}
9	OWLT ($t_{OWR} - t_{OWE}$)	seconds	nsec

Table 8-4: One-way Doppler and range prediction file format

Nomenclature:

OW one way link
TW two way link
UL uplink
DL downlink
c speed of light (c = 299,792,458 m/s)
LT Light time
 v_{LOS} relative velocity between ground station and S/C (in the line of sight)
 $r_{SC}(t)$ Position of S/C at time t
 $r_{GS}(t)$ Position of ground station at time t

t_{OWE} Time at emission of signal at S/C (one-way calculation)
 t_{OWR} Time at reception of signal at ground station (one-way calculation)

t_{TWE} Time at emission of signal at ground station (two-way calculation)
 t_{TWRU} Time at reception of signal at S/C (two-way calculation - uplink)
 t_{TWRD} Time at reception of signal at ground station (two-way calculation - downlink)

8.3 SPACECRAFT HELIOCENTRIC CRUISE ORBIT FILE

8.3.1 File name

Original file name:

ORHM_FDxMMx_DA_____vvvvv.MEX

Where

	description
ORHM	Spacecraft orbit, cruise, heliocentric Acronym as described in [11]
FDxMMx / FDxRMx	File source: ESOC Flight Dynamics (FDS) for the Mars Express Mission Control System (MMS) / for the Rosetta Mission Control System (RMS)
D	Data
A	ASCII data
_	Blank (underscore)
_____	12x blank (underscore) no specific time or time range given
_vvvvv	Version number
MEX	Mars Express file

New radio science and PDS compliant file name:

r00ESOCL1A_OHC_yydddhmm_vv.AUX

The data source identifier is set to *tttt* = *ESOC*, the data type identifier is set to *sss* = *OHC* for the heliocentric cruise orbit file. The sequence number is equal to the version number of the original file name. The extension is set to *eee* = *AUX*.

8.3.2 File format

The file format is described in the DDID Appendix H [referenced document 9]. A copy of the latest DDID Appendix H can be found on the most recent Data Archive Volumes. The structure of the Data Archive Volume is described in [10].

8.4 SPACECRAFT MARSCENTRIC ORBIT FILE

8.4.1 File name

Original file name:

ORMM_FDxMMx_DA_yymmddhhmmss_vvvvv.MEX

Where

	description
ORMM	Spacecraft orbit, operational, Marscentric Acronym as described in [11]
FDxMMx / FDxRMx	File source: ESOC Flight Dynamics (FDS) for the Mars Express Mission Control System (MMS) / for the Rosetta Mission Control System (RMS)
D	Data
A	ASCII data
_	Blank (underscore)
yymmddhhmmss	Date specifies start time of the data in the file
_vvvvv	Version number
MEX	Mars Express file

New MaRS and PDS compliant file name:

M00ESOCL1A_OMO_yydddhmm_vv.AUX

The data source identifier is set to *tttt* = *ESOC*, the data type identifier is set to *sss* = *OMO* for the marscentric operational orbit file. The sequence number is equal to the version number of the original file name. The extension is set to *eee* = *AUX*.

8.4.2 File format

The file format is described in the DDID Appendix H [referenced document 9]. A copy of the latest DDID Appendix H can be found on the most recent Data Archive Volumes. The structure of the Data Archive Volume is described in [10].

9 CALIBRATION FILES

9.1 IFMS RANGE CALIBRATION LEVEL 1B

The IFMS range calibration file is taken before or after the NNO tracking pass and contains the range delay within the IFMS ground station equipment.

9.1.1 File name

The range calibration file name is formatted according to section 4.1 by setting the archiving level to $III = L1B$, the file type to $sss = RCX$ or RCS , the file type is set to $tltt = ICL1$ or $ICL2$, depending on the uplinking IFMS and the ground station is $gg = 32$.

r32ttttL1B_sss_yyddhhmm_qq.TAB

9.1.2 File format

The file content and file format for the range calibration file is identical to the regular range file as described in section 6.2.1.3.2.2.

9.2 IFMS RANGE CALIBRATION LEVEL 2

9.2.1 Specification document

MEX-MRS-IGM-DS-3036 IFMS Ranging Processing Software: Level 1a to Level 2 Software Design Specifications

The range calibration file Level 2 contains the measured equipment delay, the average value and the 1-sigma rms value. The difference to the Level 1b file is the resolved ambiguity of the measured range delay.

9.2.2 File name

The range calibration file name is formatted according to section 4.1 by setting the archiving level to $lll = L02$, the file type to $sss = RCX$ or RCS , the file type is set to $litt = ICL1$ or $ICL2$, depending on the uplinking IFMS and the ground station is $gg = 32$.

r32ttttL02_sss_yydddhmm_qq.TAB

9.2.3 File format

column	description	unit	resolution
1	Sample number		
2	Ground received time as UTC in ISO format		
3	Ground received time as UTC in fractions of day of year starting with the first day of the year the data was recorded in at 00:00.000	days	10^{-7} days
4	Ground received time as Ephemeris time beginning at J2000 (12 h 1 January 2000 TBD)	s	s
5	Mean average value of equipment propagation delay	Seconds	nsec
6	equipment propagation delay	Seconds	nsec
7	Root Mean Square of equipment propagation delay	Seconds	nsec

9.3 IFMS DOPPLER CALIBRATION FILES

The IFMS doppler calibration file is taken before or after the NNO tracking pass at the same time as the IFMS ranging calibration file.

9.3.1 File name

The doppler calibration file name is formatted according to section 4.1 by setting the archiving level to $lll = L1B$, the file type to $sss = C1X$ or $C2X$ or $C1S$ or $C2S$, the file type is set to $ttt = ICL1$ or $ICL2$, depending on the uplinking IFMS and the ground station is $gg = 32$.

r32ttttL1B_sss_yydddhmm_qq.TAB

9.3.2 File format

The file content and file format for the doppler calibration file is identical to the regular doppler file as described in section 6.2.1.3.2.1.

Column	description	Unit
1	sample number	
2	Ground received time as UTC in ISO format	
3	Ground received time as UTC in fractions of day of year starting with the first day of the year the data was recorded in at 00:00.000	days
4	Ground received time as Ephemeris time beginning at J2000 (12 h 1 January 2000 TBD)	s
5	Interval count	
6	Unwrapped phase	cycles
7	Spurious carrier	
8	Delta delay	seconds

9.4 IFMS METEOROLOGICAL CALIBRATION

The meteorological file is the Level 1b IFMS output and describes the temperature, atmospheric pressure and humidity at the ground station site. The file is accompanied by the IFMS configuration file **.CFG* (see Appendix 12.1 for content). Since the meteorological information is stored independently from doppler and ranging measurements, these files usually do not start and stop at the same time as a Doppler or range data file. That means that sometimes the meteorological data applicable for a Doppler or range data file has to be extracted from two files.

9.4.1 File name format

The file name of the meteorological file is formatted according to section 4.1 by setting the archiving level to *III = L1B*, the file type to *sss = MET*, the file type is set to *tltt = ICL1* or *ICL2*, depending on the uplinking IFMS and the ground station is *gg = 32*.

r32ttttL1B_MET_yydddhmm_qq.TAB

9.4.2 File format

Column	description	Unit
1	Sample number	
2	UTC Time in ISO format	
3	UTC Time in DOY and fractions of day	days
4	Ephemeris time since J2000 (12 h 1 January 2000 TBD)	s
5	Humidity	0.1 %
6	Pressure	0.1 hecto Pascal
7	Temperature	0.1 °C

9.5 DSN METEO CALIBRATION FILE

9.5.1 File name format

This file presents meteorological data as a function of time at the location of the DSN ground station complexes. *gg* = 10, 40, 60 is set for the ground station complex

rggDSN0L1A_MET_yyddhhmm_qq.AUX

9.5.2 File format

The file has a header line:

DATE: yymmdd DOY: ddd DSS gg

And six columns with meteorological information for every 30 minutes

column	description	unit
1	time	hhmm
2	dew p temperature	degree Celsius
3	temperature	degree Celsius
4	pressure	mbar
5	H2O partial pressure	mbar
6	relative humidity	%

The format repeats itself for each day of the year.

9.6 DSN MODIFIED METEO CALIBRATION FILE

The DSN meteorological calibration was modified to match the format of the IFMS meteorological calibration file in order to be able to reuse existing software modules for the ODF processing at the L1B data level. One file for each ground station complex was created.

9.6.1 File name format

This file presents meteorological data as a function of time at the location of one DSN ground station complex by setting *gg* = *ground station complex*.

rggDSN0L1B_MET_yydddhmm_qq.TAB

9.6.2 File format

Column	description	Unit
1	Sample number	
2	UTC time in ISO format	
3	UTC time in DOY and fractions of day	days
4	Ephemeris time since J2000 (12 h 1 January 2000 TBD)	s
5	Humidity	0.1 %
6	Pressure	0.1 hecto Pascal
7	Temperature	0.1 °C

9.7 DSN TROPOSPHERIC CALIBRATION MODEL FILE

9.7.1 Specification Document

tbd

9.7.2 File name format

This file presents a model of the Earth troposphere at the location of a DSN ground station antenna.

rggDSN0L1A_TRO_yydddhmm_qq.AUX

9.7.3 File format

tbd

column	description	unit

9.8 DSN IONOSPHERIC CALIBRATION FILE

9.8.1 Specification Document

tbd

9.8.2 File name format

This file presents a model of the Earth ionosphere at the location of a DSN ground station antenna.

rggDSN0L1A_ION_yydddhmm_qq.AUX

9.8.3 File format

tbd

column	description	unit

9.9 CORRECTED UPLINK FREQUENCY

The wrong uplink frequency is sometimes provided in the IFMS Level 1a Doppler Raw-Files coming from ESOC. The correct frequency will be calculated and corrected in Level 2 data files. The Level 1a file including the wrong frequency, the appropriate Level 2 file including the correct frequency, and the wrong and correct frequency are provided for each occurrence of this error in the file UPLINK_FREQ_CORRECT.TAB in the CALIB directory.

There will be no UPLINK_FREQ_CORRECT.TAB if all uplink frequencies in the Level 1a IFMS Doppler files are correct.

10 GEOMETRY FILES

10.1 PLANETARY CONSTELLATION GEOMETRY

10.1.1 Specification Document

A barycentric EME 2000 state vector file is provided by UniBwM and contains the state vectors of the Earth and a given interplanetary body from Table 10-1.

MEX-MRS-IGM-DS-3039 Radio Science Predicted and Reconstructed Orbit and Planetary Constellation Data: Specifications

10.1.2 File name

The file name is formatted according to section 4.1 by setting the archiving level to *///* = *L02* and the file type *sss* can be found in Table 10.1. The data source identifier is set to *tttt* = *UNBW*. The state vector file is always barycentric (solar system barycentre) EME 2000.

r00UNBWL02_sss_yydddhmm_qq.TAB

Spacecraft	Interplanetary body	sss
Mars Express	Mars	MAR
Venus Express	Venus	VEN
Rosetta	Asteroid (tbd)	Tbd
Rosetta	Comet 67 P/Churyumov-Gerasimenko	P67

Table 10-1: interplanetary bodies

10.1.3 File format

column	description	unit	resolution
1	Sample number		
2	time as UTC in ISO format		
3	time as UTC in fractions of day of year starting with the first day of the year the data was recorded in at 00:00.000	days	10^{-7} days
4	time as Ephemeris time beginning at J2000 (12 h 1 January 2000 TBD)	seconds	seconds
5	x-component Earth r_{Ex}	AU	10^{-9} AU
6	y-component Earth r_{Ey}	AU	10^{-9} AU
7	z-component Earth r_{Ez}	AU	10^{-9} AU
8	x-component Planet r_{Px}	AU	10^{-9} AU
9	y-component Planet r_{Py}	AU	10^{-9} AU
10	z-component Planet r_{Pz}	AU	10^{-9} AU
11	angle Planet-Sun-EarthPSE	deg	0.1 deg
12	angle Sun-Earth-Planet SEP	deg	0.1 deg
13	angle Sun-Planet-EarthSPE	deg	0.1 deg
14	solar offset R	solar radii	0.01 solar radii

Table 10-2: file format of the solar conjunction geometry file.

11 SPICE

11.1 INTRODUCTION

11.1.1 Spice files

The NAIF group at JPL will produce SPICE files from the Mars Express orbit files generated by ESOC. The SPICE files relevant for the respective MaRS data will be copied on the archive CD-ROM volume. They are also available from the following file servers:

At ESTEC:

<ftp://solarsystem.estec.esa.nl/pub/projects/mex/data/spice>

at JPL:

<ftp://naif.jpl.nasa.gov/pub/naif/MEX>

available SPICE files:

- | | |
|-----------|--|
| 1. SPK | spacecraft orbit kernel file |
| 2. EK | ephemeris kernel file for the planets |
| 3. CK | C-matrix instrument attitude kernel file |
| 4. TLS | leap second kernel file |
| 5. FK | frame kernel file |
| 6. IK | instrument kernel file |
| 7. ORBNUM | orbit numbering kernel file |
| 8. PCK | planetary constant kernel file |
| 9. SCLK | spacecraft clock kernel file |

11.1.2 File handling and description

The documentation of the SPICE subroutines and the use of the kernels is described in [15] and can be retrieved from

ftp://naif.jpl.nasa.gov/pub/naif/toolkit_docs/Tutorials/pdf/

11.2 SPK ORBIT KERNEL FILE

11.2.1 File name

ESTEC original file name:

AAAA_____vvvvv.BSP

Where

	description
aaaa	ORMM = spacecraft orbit, operational, marscentric ORMF = spacecraft orbit, marscentric, frozen orbit ORHM = spacecraft orbit, cruise, heliocentric, Mars Express Aconym as described in [11]
_____	14 underscores
vvvvv	Version number
BSP	Binary SP file

11.3 EK EPHEMERIS KERNEL FILE

11.3.1 File name

ESTEC original file name:

tbd

Where

	description

11.4 CK C-MATRIX INSTRUMENT ATTITUDE FILE

11.4.1 File name

ESTEC original file name:

ATNM_Pyymmddhhmmss_vvvvv.BC

Where

	description
ATNM	Predicted / reconstituted attitude Aconym as described in [11]
P	P = predicted
yymmddhhmmss	Time stamp
vvvvv	Version number
BC	Binary CK file

11.5 TLS LEAP SECOND KERNEL FILE

11.5.1 File name

JPL/NAIF original file name:

NAIFvvvv.TLS

currently the most actual leap second file.

Where

	description
NAIF	
vvvv	Version number (currently 0007)

11.6 FK FRAME KERNEL FILE

11.6.1 Frame Kernel File name

There are five actual JPL/NAIF frame kernel files with the original file names:

Original file name	description
DSN_TOPO.TF	Frame kernel file for all DSN ground stations
NEW_NORCIA_TOPO.TF	Frame kernel file for the 35-m station in New Norcia (NNO). An read.me file is available. A location SPK file is available under the old file name <i>NEW_NORCIA.BSP</i> and described in 11.6.2
EARTHFIXEDIAU.TF	SPICE reference frame mapped to EARTH_IAU
EARTHFIXEDITRF93.TF	SPICE reference frame mapped to IRTF 1993
MEX_V04.TF	Mars Express spacecraft frame kernel

11.6.2 Location Kernel file name

The following location kernels are available:

Original NAIF file name	description
NEW_NORCIA.BSP	A location SPK file for the 35-m New Norcia station

11.7 IK INSTRUMENT KERNEL FILE

11.7.1 File name

NAIF original file name:

tbd

Where

	description

11.8 ORBNUM ORBIT NUMBERING FILE

11.8.1 File name

ESTEC original file name:

ORMF_____vvvvv.ORB

Where

	description
ORMF	ORMF = spacecraft orbit, marscentric, frozen orbit Aconym as described in [11]
_____	14 underscores
vvvvv	Version number the highest version number presents the most actual file
ORB	Orbit numbering file

An important descriptive file is availbale as:

M00NAIFL1B_ORB_04001000000_vv.TXT

11.9 PCK PLANETARY CONSTANT FILE

11.9.1 File name

NAIF original file name	description
MARS_IAU2000_V0.TPC	Mars planetary constant file

11.10 SCLK SPACECRAFT CLOCK KERNEL FILE

11.10.1 File name

NAIF original file name:

MEX_yymmdd_STEP.TSC

Where

	description
MEX_yymmdd_STEP.TSC	This file is a SPICE spacecraft clock (SCLK) kernel containing information required for MEX spacecraft on-board clock to UTC conversion. The most actual file will be provided
yymmdd	Is the start time of the clock kernel

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	117 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

Page left free

12 TIME STANDARDS AND FORMATS

12.1 TIME STANDARDS

MaRS, RSI and VeRa data products makes use of different Time and Reference system. For our data processing and archiving the most important Time Systems are:

1. Coordinated Universal Time (UTC)
2. Ephemeris Time (ET)

The scientific success of a Radio Science Experiment depends critically on a common understanding about the conventions for the reference and time systems. The following sections give an overview of the time standards necessary to understand the above mentioned Time systems and to convert to other common Time Systems. It should be noted that radio science data are generated and recorded at ground stations. Thus the times given in the data and label files are ground station and not onboard time.

12.1.1 Coordinated Universal Time (UTC)

Coordinated Universal Time (UTC) is obtained from atomic clocks running at the same rate as TT (see section 12.1.3.3) or TAI (see section 12.1.3.2). The UTC time scale is always within 0.7 seconds of UT1 (see section 12.1.3.5). By the use of leap seconds, care is taken to ensure that this difference is never exceeded. However, because of the introduction of the leap seconds it becomes clear that this time scale is not steady.

The International Earth Rotation Service (IERS) can add leap seconds and is normally doing this at the end of June or December of each year if necessary. The actual UTC can only be determined for a previous point in time but predictions for the future are published by the IERS. This fact should be noted when future missions are planned on the base of the UTC time standard.

UTC can be obtained by the difference of the predicted value DUT1 or the past value ΔUT between UT1 and UTC published in the IERS Bulletin A (<http://maia.usno.navy.mil/>) which contains previous leap seconds and predictions :

$$UTC = UT1 - DUT1 \quad \text{or} \quad UTC = UT - \Delta UT$$

This relation is needed to obtain UT1 (UT) from UTC.

12.1.2 Dynamical Time Scale T_{eph} for the JPL DE 405 Ephemeris

In a general relativistic framework, time is not an absolute quantity but depends on the location and motion of a clock. Therefore unlike UTC T_{eph} is not based on the rotation of the earth around its axis. T_{eph} refers to the center of mass of the solar system and is the independent variable of *barycentric planetary ephemerides*. It should be noted that during the years 1984 – 2003 the time scale of ephemerides referred to the barycenter of the solar system was the relativistic time scale Barycentric Dynamic Time TDB (see section 12.1.3.1).

From 2004 onwards this time scale for the JPL DE 405 ephemeris will be replaced by T_{eph} . For practical purposes the length of the ephemeris second can be taken as equal to the length of the TDB second. T_{eph} is approximately equal to TDB, but not exactly. On the other hand, T_{eph} is mathematically and physically equivalent to the newly-defined TCB (see section 12.1.3.7), differing from it by only an offset and a constant rate. Within the accuracy required by MaRS, RSI and VeRa we use: $T_{\text{eph}} \sim \text{TDB}$.

T_{eph} is then defined as seconds past J2000, with J2000 being 12 h 1 January TDB.

12.1.3 Other Time Standards

12.1.3.1 *Barycentric Dynamic Time (TDB)*

Since the differences compared to TT are fairly small, the corrections can be determined by the following approximation :

$$\text{TDB} = \text{TT} + 0.001658^{\text{s}} \cdot \sin g + 0.000014^{\text{s}} \cdot \sin (2g)$$

with g being the mean anomaly of the Earth in its orbit given by

$$g = 357.53 + 0.9856003 \cdot (\text{JD}(\text{UT1}) - 2451545.0) \quad [\text{deg}]$$

12.1.3.2 *International Atomic Time (TAI)*

TAI provides the practical realization of a uniform time scale based on atomic clocks. This time is measured at the surface of the Earth. Since this time scale is a steady one, it differs from UTC by an integral number of leap seconds introduced up the current point in time:

$$\text{TAI} = \text{UTC} + \text{LS}$$

where LS is the number of leap seconds. The unit of TAI is the SI second.

12.1.3.3 Terrestrial Dynamic Time (TT)

Terrestrial Time (TT) – formerly Terrestrial Dynamical Time (TDT) - is to be understood as time measured on the geoid. It has conceptionally a uniform time scale. TT is the independent variable of *geocentric ephemerides*. TT replaced Ephemeris Time (ET) in 1984. The difference between TT and the atomic time scale (TAI) is a constant value of 32.184 seconds:

$$TT = TAI + 32.184^s$$

One therefore obtains also the relationship:

$$UTC = TT - 32.184^s - LS$$

TT does not take into account relativistic corrections. It is used as an independent argument of geocentric ephemeris.

12.1.3.4 GMT (UT)

Time is traditionally measured in days of 86400 SI seconds. Each day has 24 hours counted from 0^h at midnight. The motion of the real sun was replaced by the concept of a fictitious mean sun that moves uniformly in right ascension defining the Greenwich Mean Time (GMT) or Universal Time (UT). Greenwich Mean Sidereal Time (GMST), however, is the Greenwich hour angle of the vernal equinox, i. e. it denotes the angle between mean vernal equinox of date and the Greenwich meridian.

The mean vernal equinox is based on a reference system which takes into account the secular effects, i.e. the precession of the Earth's equator but not periodic effects such as the nutation of the Earth's axis.

In terms of SI seconds, the length of a sidereal day (i. e. the Earth's spin period) amounts 23^h 56^m 4^s.091 ± 0^s.005 (corresponding to a factor 1/1.00273790935) making it about four minutes shorter than a 24^h solar day. Hence, sidereal time and mean solar time have different "rates".

12.1.3.5 Universal Time (UT1)

Universal Time UT1 is the presently adopted realization of a mean solar time scale (constant average length of a solar day of 24 hours) with $UT1 = UT$. As a result, the length of one second of UT1 is not constant because of the apparent motion of the sun and the rotation of the Earth. UT1 is therefore defined as a function of sidereal time.

For any particular day, 0 h UT1 is defined as the instant at which Greenwich Mean Sidereal Time (GMST) has the value:

$$GMST(0^h UT1) = 24110^s.54841 + 8640184^s.812866 \cdot T_o \\ + 0^s.093104 \cdot T_o^2 - 0^s.0000062 \cdot T_o^3$$

For an arbitrary time of the day, the expression may be generalized to obtain the Greenwich hour angle GHA by multiplying this time with the factor 1.00273790935, adding this result to GMST and convert it into degrees (if so desired)

$$GMST (UT1) = 24110^s.54841 + 8640184^s.812866 T_o + 1.00273790935 UT1 + 0^s.093104 T^2 - 0^s.0000062 \cdot T^3$$

where T is the time in Julian centuries since the 1st of January 2000, 12 h, i.e. 2000 Jan. 1.5 :

$$T = \frac{JD(UT1) - 2451545}{36525}$$

and JD is the Julian Date.

Ecliptic and Earth equator at 2000 Jan 1.5 define the *J2000 system*.

The most useful relation for computer software is one that uses only JD (UT1):

$$GMST(^{\circ}) = 280.46061837 + 360.98564736629 \cdot (JD - 2451545.0) + \\ + 0.000387933 T^2 - T^3 / 38710000$$

The difference between UT1 and TT or TAI (atomic clock time, to be explained below) can only be determined retrospectively. This difference is announced by the International Earth Rotation Service (IERS) and is handled in practice by the implementation of leap seconds (maximum of two in one year).

The above formulae contain implicitly the Earth's mean angular rotation $\omega_{\oplus}$ in degrees per second [3.15].

$$\omega_{\oplus} (rad / s) = \left\{ 1.002737909350795 + 5.9006 \cdot 10^{-11} T - 5.9 \cdot 10^{-15} T^2 \right\} \cdot \frac{2\pi}{86400_s}$$

12.1.3.6 Geocentric Coordinate Time (TCG)

Geocentric Coordinate Time TCG represents the time coordinate of a four dimensional reference system and differs from TT by a constant scale factor yielding the relation

$$TCG = TT + L_G \cdot (JD - 2443144.5) \cdot 86400 \text{ s}$$

$$L_G = 6.9692903 \cdot 10^{-10}$$

For practical reasons this equation can also be put into the following relation :

$$TCG = TT + 2.2 \text{ s/cy} \cdot (\text{year} - 1977.0)$$

cy = century

12.1.3.7 Barycentric Coordinate Time (TCB)

The Barycentric Coordinate Time TCB has been introduced to describe the motion of solar system objects in a non rotating relativistic frame centered at the solar system barycenter. TCB and TCG exhibit a rate difference which depends on the gravitational potential of the Sun at the mean Earth-Sun distance 1 AU and the Earth's orbital velocity. The accumulated TCB-TT time difference amounts to roughly 11 s around epoch J2000.

$$TCB = TCG + L_C \cdot (JD - 2443144.5) \cdot 86400 \text{ s} + P$$

(Mc Carthy 1996) and

$$\begin{aligned}
P \approx & +0^{\text{s}}.0016568 \cdot \sin(35999^{\circ}.37T + 357^{\circ}.5) \\
& + 0^{\text{s}}.0000224 \cdot \sin(32964^{\circ}.5T + 246^{\circ}) \\
& + 0^{\text{s}}.0000138 \cdot \sin(71998^{\circ}.7T + 355^{\circ}) \\
& + 0^{\text{s}}.0000048 \cdot \sin(3034^{\circ}.9T + 25^{\circ}) \\
& + 0^{\text{s}}.0000047 \cdot \sin(34777^{\circ}.3T + 230^{\circ}) \\
T = & (JD - 2451545.0) / 36525
\end{aligned} \tag{3.16}$$

$$L_C = 1.4808268457 \cdot 10^{-8}$$

The largest contribution is given by the first term. When neglecting the other terms we can approximate P by:

$$P = 0.001658^{\text{s}} \sin(g) + 0.000014^{\text{s}} \sin(2g)$$

12.1.3.8 Julian Date (JD)

In astronomical computations, a continuous day count is used which avoids the usage of a calendar. The Julian Date (JD) is the number of days since noon January 1, 4712 BC including fractions of the day.

12.1.3.9 Modified Julian Date (MJD)

Since the JD has become such a large number, the Modified Julian Date was introduced for convenience. JD was reset at November 17th 1858 which leads to the following equation :

$$\text{MJD} = \text{JD} - 2400000.5^d$$

Note that the count for MJD starts at midnight.

12.2 TIME FORMATS

12.2.1 ISO Time Format

In our data and label files we use UTC time to measure the time the data were recorded at the ground station in the PDS compliant ISO/DIS 8601 standard format CCYY-MM-DDTHH:MM:SS.sss. (Example: 2004-06-21T025208.000 corresponds to the date 21.6.2004 and the time of day 2:52:08.000).

12.2.2 Time in Fractions of Days of Year

This is the UTC time in the format fraction of days of year starting with the first day of year the data was recorded at 00:00.000 UTC. (Example: 2003-07-01T18:03:02.000 in ISO format corresponds to 182.752106 in fraction of days since the 1st July was the 182th day of the year 2003.) This format is only used in the data files.

12.2.3 Ephemeris Time Format

Ephemeris time is given in seconds starting with the 1st January 2000 at 12:00:00.000 TBD (see also section 12.1.2).

13 APPENDIX

13.1 IFMS CONFIGURATION FILE EXPLANATION

line	abbreviation	possible value	description
1	station_id	NN12	
2	spacecraft_id	MEX1	
3	data_set_kind	OP	
4	dap_type	D1	
5	ref_time_tag	20030702.001055.000	
6	first_sample_time	20030702.002114.000	
7	last_sample_time	20030702.021414.000	
8	requestor_id	STC	
9	requested_id	1	
10	why_opend	Conf_Changed	
11	total_samples	6781	
12	sample_period	1.	
13	internal_reference	No	
14	uplink_carrier_230	Yes	
15	actual_carrier_indic	3067833783.	
16	actual_tone_indic	-	
17	epd_source	0	
18	rg_data_corrected	No	
19	sequence_id	3	
20	LogMaxEv	N/A in input Data	Maximum number of logged events
21	LogDebugMode	N/A in input Data	Select `Debug` logging level
22	Dsp_MetPresent	N/A in input Data	Meteorological Unit present
23	Dsp_UlmPresent	N/A in input Data	Up-Link Modulator present
24	Dsp_Cf1Present	N/A in input Data	Common Front End #1 present
25	Dsp_Cf2Present	N/A in input Data	Common Front End #1 present
26	Dsp_DcePresent	N/A in input Data	Diversity Combination Estimator present and GDSP
27	Dsp_RgdPresent	N/A in input Data	Ranging Demodulator present and GDSP
28	Dsp_RcdPresent	N/A in input Data	Remnant Carrier Demodulator present and GDSP
29	Dsp_ScdPresent	N/A in input Data	Suppressed Carrier Demodulator present and GDSP
30	Dsp_TcdsPresent	N/A in input Data	Telemetry Channel Decoder System present and GDSP
31	UlmCarFrSel	"230MHz"	Up-Link Modulator Carrier

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	125 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

			Output Frequency
32	UImCarFrOffs	0	Up-Link Modulator Carrier Output Frequency Offset
33	UImCarNomLvl	4	Up-Link Modulator Carrier Nominal output level
34	UImCarTstOut	No	Up-Link Modulator Carrier Test output selection
35	UImCarTstLvl	0.0	Up-Link Modulator Carrier Test output attenuation
36	UImCarSpecInv	No	
37	UImSwpDelStF	0	Up-Link Modulator Carrier Sweep: Delta Start Frequency
38	UImSwpDelSpF	0	Up-Link Modulator Carrier Sweep: Delta Stop Frequency
39	UImSwpRate	1	Up-Link Modulator Carrier Sweep: sweep rate
40	UImSwpAccFact	1	Up-Link Modulator Carrier Sweep: acceleration factor
41	UImPrior	No	Up-Link Modulator Carrier modulation TC priority selection
42	UImTcSrc	"TCE1"	Up-Link Modulator TC data source
43	UImTcDataCoding	"NRZ-L"	Up-Link Modulator TC data coding
44	UImTcTceMode	"Normal"	Up-Link Modulator TC TCE mode
45	UImTcModIdx_Ana	0.0000	Up-Link Modulator TC modulation index for analogue source
46	UImTcModIdx_Dig	1.000	Up-Link Modulator TC modulation index for digital source
47	UImTcMod	"PM on sub-carrier"	Up-Link Modulator TC modulation mode
48	UImTcRCBRateN	1	Up-Link Modulator TC bit-rate numerator in RC modes (1=>integer mode)
49	UImTcRCBRateD	8	Up-Link Modulator TC bit-rate denominator in RC modes
50	UImTcSCBRateP	100.00	Up-Link Modulator TC P- channel bit-rate in SC modes
51	UImTcSCBRateQ	100.00	Up-Link Modulator TC Q- channel bit-rate (U-QPSK only)

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	126 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

52	UImTcUnbalRatio	-15.0	Up-Link Modulator TC modulation unbalance ratio (U-QPSK only)
53	UImTcSqWavSubc	No	Up-Link Modulator TC square-wave subcarrier selection (RC only)
54	UImTcRCBRateSel	No	Up-Link Modulator TC irrational bit-rate selection for RC modes
55	UImTcRCIrrBRate	2000.00	Up-Link Modulator TC irrational bit-rate for RC modes
56	UImTcSubF	16000	Up-Link Modulator TC sub-carrier frequency
57	UImRampTime	0.00	Up-Link Modulator TC & Tone modulation index ramp time (0=> no ramp)
58	UImTestPat	N/A in input Data	Up-Link Modulator Test bit pattern selection
59	Cf1Input	N/A in input Data	Common Front End 1 Input selection
60	CfeAgcCst	N/A in input Data	Common Front End 1&2 AGC Time Constant
61	CfeAgcHead	N/A in input Data	Common Front End 1&2 AGC Head room
62	Cf1AGain	N/A in input Data	Common Front End 1 Channel A gain (used if CfeAgcCst is 0)
63	Cf1BGain	N/A in input Data	Common Front End 1 Channel B gain (used if CfeAgcCst is 0)
64	Cf1Dither	N/A in input Data	Common Front End 1 Dither noise enabled
65	Cf2Input	N/A in input Data	Common Front End 2 Input selection
66	Cf2AGain	N/A in input Data	Common Front End 2 Channel A gain (used if CfeAgcCst is 0)
67	Cf2BGain	N/A in input Data	Common Front End 2 Channel B gain (used if CfeAgcCst is 0)
68	Cf2Dither	N/A in input Data	Common Front End 2 Dither noise enabled
69	DceFreqPlan	N/A in input Data	Diversity Combination Estimator Frequency plan selection
70	DceInput	N/A in input Data	Diversity Combination Estimator Input selection
71	DceExpCN0Avail	N/A in input Data	Diversity Combination Estimator Expected C/No available

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	127 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

72	DceExpCN0	N/A in input Data	Diversity Combination Estimator Expected C/No
73	DceCFrUnc	N/A in input Data	Diversity Combination Estimator Carrier frequency uncertainty
74	DceCFrRateUnc	N/A in input Data	Diversity Combination Estimator Carrier frequency rate uncertainty
75	DceCAcqMode	N/A in input Data	Diversity Combination Estimator Acquisition Mode (SC: sweep, RC: FFT1)
76	DceUseAcq	N/A in input Data	Diversity Combination Estimator Use acquisition for initial phase estimate
77	DceCorrBw	N/A in input Data	Diversity Combination Estimator Correlation bandwidth
78	DceEstMode	N/A in input Data	Diversity Combination Estimator Estimator mode
79	DceAngPreSt	N/A in input Data	Diversity Combination Estimator Polarisation angle rate pre-steer
80	DceModRemov	N/A in input Data	Diversity Combination Estimator Modulation removal
81	DceFftCentre	N/A in input Data	Diversity Combination Estimator slow FFT: centre frequency
82	DceFftSpan	N/A in input Data	Diversity Combination Estimator slow FFT: span ratio (actual span is 17.5 MHz / N)
83	DceAna_0	N/A in input Data	Diversity Combination Estimator Analogue driver
84	DceAna_1	N/A in input Data	Diversity Combination Estimator Complex analogue source
85	DceAna_2	N/A in input Data	Diversity Combination Estimator Real analogue source
86	RgdSpecInv	No	Ranging Demodulator Spectrum inversion
87	RgdUpkConv	6936988810	Ranging Demodulator Up-link carrier conversion
88	RgdCoherTrs	Yes	Ranging Demodulator Coherent transponder
89	RgdTR1	880	Ranging Demodulator

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	128 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

			Spacecraft coherent transponder ration numerator
			Ranging Demodulator
			Spacecraft coherent transponder ration denominator
90	RgdTR2	749	Ranging Demodulator
91	RgdDnlkCF	8420429800	Spacecraft non-coherent down-link carrier freq.
92	RgdDnlkConv	8350165420	Ranging Demodulator Down-link carrier conversion
93	RgdPolarisation	"Combined"	
94	RgdPhEst	0.00	Ranging Demodulator Manual phase estimate
95	RgdPostProc	1	Ranging Demodulator Post-processing
96	RgdExpCN0Avail	Yes	Ranging Demodulator Expected C/No available
97	RgdExpCN0	46	Ranging Demodulator Expected C/No
98	RgdCFrUnc	1000000	Ranging Demodulator Carrier frequency uncertain
99	RgdCFrRateUnc	1000	Ranging Demodulator Carrier frequency rate uncertain
100	RgdCAcqMode	"FFT2"	Ranging Demodulator Carrier acquisition
101	RgdUseAcq	Yes	Ranging Demodulator Use acquisition for initial phase estimate
102	RgdCLpNoBw	300.0	Ranging Demodulator Carrier loop noise bandwidth (2BL)
103	RgdCLpOrder	2	Ranging Demodulator Carrier loop order
104	RgdCLpPhEst	"RCD"	Ranging Demodulator Carrier loop phase estimator
105	RgdCLp_ChgDel	"STEP"	Ranging Demodulator Carrier loop – Change delay
106	RgdTLpBw	1.260	Ranging Demodulator Tone loop bandwidth
107	RgdTLPreSt	Yes	Ranging Demodulator Tone loop Doppler presteering enable
108	RgdTLp_ChgDel	"STEP"	Ranging Demodulator Tone loop – Change delay
109	RgdAna_0	N/A in input Data	Ranging Demodulator

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	129 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

			Analogue driver
110	RgdAna_1	N/A in input Data	Ranging Demodulator Complex analogue source
111	RgdAna_2	N/A in input Data	Ranging Demodulator Real analogue source
112	RcdSpecInv	No	Remnant Carrier Demodulator Spectrum inversion
113	RcdUpIkConv	6936988810	Remnant Carrier Demodulator Up-link carrier conversion
114	RcdCoherTrs	Yes	Remnant Carrier Demodulator Coherent transponder
115	RcdTR1	880	Remnant Carrier Demodulator Spacecraft coherent transponder ratio numerator
116	RcdTR2	749	Remnant Carrier Demodulator Spacecraft coherent transponder ratio denominator
117	RcdDnlkCF	8420429800	Remnant Carrier Demodulator Spacecraft non-coherent down-link carrier freq.
118	RcdDnlkConv	8350165420	Remnant Carrier Demodulator Down-link carrier conversion
119	RcdPolarisation	"Combined"	
120	RcdPhEst	0.00	Remnant Carrier Demodulator Manual phase estimate
121	RcdPostProc	1	Remnant Carrier Demodulator Post-processing
122	RcdExpCN0Avail	Yes	Remnant Carrier Demodulator Expected C/No available
123	RcdExpCN0	46	Remnant Carrier Demodulator Expected C/No
124	RcdCFrUnc	1000000	Remnant Carrier Demodulator Carrier frequency uncertainty
125	RcdCFrRateUnc	1000	Remnant Carrier Demodulator Carrier frequency rate uncertainty
126	RcdCAcqMode	"FFT2"	Remnant Carrier Demodulator acquisition mode (FFT1 recommended)
127	RcdUseAcq	Yes	Remnant Carrier Demodulator Use acquisition for initial phase estimate
128	RcdCLpNoBw	100.0	Remnant Carrier Demodulator Carrier loop noise bandwidth (2BL)

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	130 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

129	RcdCLpOrder	2	Remnant Carrier Demodulator Carrier loop order
130	RcdCLpPhEst	"RCD"	Remnant Carrier Demodulator Carrier loop phase estimator
131	RcdCLp_ChgDel	"STEP"	Remnant Carrier Demodulator Carrier loop – Change delay
132	RcdTLpBw	0.00010	Remnant Carrier Demodulator Timing loop bandwidth (2BL)
133	RcdTLpOrder	2	Remnant Carrier Demodulator Timing loop order
134	RcdTLpPhEst	"DD"	Remnant Carrier Demodulator Clock loop estimator
135	RcdTLp_ChgDel	"STEP"	Remnant Carrier Demodulator Timing loop – Change delay
136	RcdSCLpFreq	0	Remnant Carrier Demodulator Subcarrier loop nominal subcarrier frequency
137	RcdSCLpPreSt	No	Remnant Carrier Demodulator Subcarrier loop Subcarrier loop enable pre-steering
138	RcdSCLpBw	0.00010	Remnant Carrier Demodulator Subcarrier loop bandwidth
139	RcdSCLpModInd	1.10	Remnant Carrier Demodulator Subcarrier loop expected modulation index
140	RcdSCLpPhEst	"Decision directed"	Remnant Carrier Demodulator Subcarrier loop phase est. Mode (NDA if Es/No<-2dB)
141	RcdSCLpAcq	"None"	Remnant Carrier Demodulator Subcarrier loop acquisition strategy
142	RcdSCLpBitNum	1	Remnant Carrier Demodulator Subcarrier loop bit clock numerator
143	RcdSCLpBitDen	1	Remnant Carrier Demodulator Subcarrier loop bit clock denominator
144	RcdSCLpSqWavSc	Yes	Remnant Carrier Demodulator Subcarrier loop square wave subcarrier
145	RcdSCLpSRateUsed	Yes	Remnant Carrier Demodulator Subcarrier loop symbol rate used
146	RcdSCLpSRate	419430.40	Remnant Carrier Demodulator Subcarrier loop symbol rate

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	131 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

147	RcdSCLpDecodMode	"NRZ-L"	Remnant Carrier Demodulator Subcarrier loop decoding mode
148	RcdSCLp_ChgDel	"STEP"	Remnant Carrier Demodulator Subcarrier loop – Change delay
149	RcdAna_0	N/A in input Data	Remnant Carrier Demodulator Analogue driver
150	RcdAna_1	N/A in input Data	Remnant Carrier Demodulator Complex analogue source
151	RcdAna_2	N/A in input Data	Remnant Carrier Demodulator Real analogue source
152	ScdSpecInv	No	Suppressed Carrier Demodulator Spectrum inversion
153	ScdUpIkConv	1000000000	Suppressed Carrier Demodulator Up-link carrier conversion
154	ScdCoherTrs	No	Suppressed Carrier Demodulator Coherent transponder
155	ScdTR1	1	Suppressed Carrier Demodulator Spacecraft coherent transponder ratio numerator
156	ScdTR2	1	Suppressed Carrier Demodulator Spacecraft coherent transponder ratio denominator
157	ScdDnIkCF	1000000000	Suppressed Carrier Demodulator Spacecraft non- coherent down-link carrier freq.
158	ScdDnIkConv	1000000000	Suppressed Carrier Demodulator Down-link carrier conversion
159	ScdPolarisation	"X"	Suppressed Carrier Demodulator Manual phase estimate
160	ScdPhEst	0.00	Suppressed Carrier Demodulator Post.processing
161	ScdPostProc	1	Suppressed Carrier Demodulator Expected C/No available
162	ScdExpCN0Avail	No	Suppressed Carrier
163	ScdExpCN0	6	Suppressed Carrier

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	132 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

			Demodulator Expected C/No
			Suppressed Carrier
164	ScdCFrUnc	0	Demodulator Carrier frequency uncertainty
			Suppressed Carrier
165	ScdCFrRateUnc	0	Demodulator Carrier frequency rate uncertainty
			Suppressed Carrier
166	ScdCAcqMode	"Sweep"	Demodulator Carrier acquisition mode (Sweep recommended)
			Suppressed Carrier
167	ScdUseAcq	No	Demodulator Use acquisition for initial phase estimate
			Suppressed Carrier
168	ScdCLpNoBw	0.1	Demodulator Carrier loop Noise bandwidth (2BL)
			Suppressed Carrier
169	ScdCLpOrder	1	Demodulator Carrier loop order
			Suppressed Carrier
170	ScdCLpPhEst	"RCD"	Demodulator Carrier loop phase estimator
			Suppressed Carrier
171	ScdCLp_ChgDel	"STEP"	Demodulator Carrier loop – Change delay
			Suppressed Carrier
172	ScdTLpBw	0.00001	Demodulator Timing loop bandwidth (2BL)
			Suppressed Carrier
173	ScdTLpOrder	1	Demodulator Timing loop order
			Suppressed Carrier
174	ScdTLpPhEst	"DD"	Demodulator Clock loop estimator
			Suppressed Carrier
175	ScdTLp_ChgDel	"STEP"	Demodulator Timing loop – Change delay
			Suppressed Carrier
176	ScdModFormat	"off"	Demodulator Modulation format
			Suppressed Carrier
177	ScdModPRate	100	Demodulator Modulation P symbol rate
			Suppressed Carrier
178	ScdModQRate	100	Demodulator Modulation Q symbol rate (only for U-QPSK)

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	133 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

179	ScdModExpBalAv	No	Suppressed Carrier Demodulator Modulation expected balance ratio available
180	ScdModExpBal	1.0	Suppressed Carrier Demodulator Modulation expected balance ratio
181	ScdModIChCoding	"NRZ-L"	Suppressed Carrier Demodulator Modulation I Channel Coding
182	ScdModQChCoding	"NRZ-L"	Suppressed Carrier Demodulator Modulation Q Channel Coding
183	ScdMchPulse	No	Suppressed Carrier Demodulator match filter: pulse shaped selection
184	ScdMchCosine	No	Suppressed Carrier Demodulator match filter: root raise cosine selection
185	ScdMchExcBw	20	Suppressed Carrier Demodulator match filter: excess bandwidth
186	ScdAna_0	N/A in input Data	Suppressed Carrier Demodulator Analogue driver
187	ScdAna_1	N/A in input Data	Suppressed Carrier Demodulator Complex analogue source
188	ScdAna_2	N/A in input Data	Suppressed Carrier Demodulator Real analogue source
189	D1Dur	72000	Doppler 1 Data Acquisition Process: default duration
190	D1SplPer	"1"	D1 Data Acquisition Process: sampling period
191	D1MaxDs	10000	Doppler 1 Data Acquisition Process: maximum samples per data-set
192	D1DSetKind	"OP"	Doppler 1 Data Acquisition Process: data-set kind (2 characters used)
193	D1Source	"RGD"	Doppler 1 Data Acquisition Process: source
194	D2Dur	72000	Doppler 2 Data Acquisition Process: default duration
195	D2SplPer	"1"	Doppler 2 Data Acquisition

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	134 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

			Process: sampling period
			Doppler 2 Data Acquisition
			Process: maximum samples
196	D2MaxDs	10000	per data-set
			Doppler 2 Data Acquisition
197	D2DSetKind	"OP"	Process: data-set kind (2
			characters used)
			Doppler 2 Data Acquisition
198	D2Source	"RCD"	Process: source
			AGC 1 Data Acquisition
199	G1Dur	72000	Process: default duration
			AGC 1 Data Acquisition
200	G1SplPer	1.0	Process: sampling period
			AGC 1 Data Acquisition
			Process: maximum samples
201	G1MaxDs	10000	per data-set
			AGC 1 Data Acquisition
202	G1DSetKind	"OP"	Process: data-set kind (2
			characters used)
			AGC 1 Data Acquisition
203	G1Source	"RCD"	Process: source
			AGC 2 Data Acquisition
204	G2Dur	72000	Process: default duration
			AGC 2 Data Acquisition
205	G2SplPer	1.0	Process: sampling period
			AGC 2 Data Acquisition
			Process: maximum samples
206	G2MaxDs	10000	per data-set
			AGC 2 Data Acquisition
207	G2DSetKind	"OP"	Process: data-set kind (2
			characters used)
			AGC 2 Data Acquisition
208	G2Source	"RGD"	Process: source
			Meteo Data Acquisition
209	MeDur	72000	Process: default duration
			Meteo Data Acquisition
210	MeSplPer	60	Process: sampling period
			Meteo Data Acquisition
			Process: maximum samples
211	MeMaxDs	10000	per data-set
			Meteo Data Acquisition
212	MeDSetKind	"OP"	Process: data-set kind (2
			characters used)
			Ranging Data Acquisition
213	RgDur	72000	Process: default duration

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	135 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

214	RgSplPer	1	Ranging Data Acquisition Process: sampling period
215	RgMaxDs	10000	Ranging Data Acquisition Process: maximum samples per data-set
216	RgDSetKind	"OP"	Ranging Data Acquisition Process: data-set kind (2 characters used)
217	RgToneF	1061683.200	Ranging Data Acquisition Process: nominal tone frequency
218	RgToneTxModInd	0.7	Ranging Data Acquisition Process: transmitted tone modulation index
219	RgToneRxModInd	0.2	Ranging Data Acquisition Process: expected received tone modulation index
220	RgToneInteg	1.0	Ranging Data Acquisition Process: tone integration time
221	RgToneSettl	1.0	Ranging Data Acquisition Process: tone settling time
222	RgCodeModInd	"High&Low"	Ranging Data Acquisition Process: code modulation index
223	RgCodeMax	14	Ranging Data Acquisition Process: maximum code length
224	RgCodeInteg	0.5	Ranging Data Acquisition Process: code integration time
225	RgCodeRestart	Yes	Ranging Data Acquisition Process: code sequence immediate restart
226	RgCodeRepet	No	Ranging Data Acquisition Process: repetitive code sequence
227	Epd	13.33	Expected propagation delay
228	EpdDer	0.000020099	Expected propagation delay derivative
229	EpdTime	"19700101.000000.000"	Time of given Epd
230	StationId	"NN12"	Station identifier (4 characters used)
231	MissionId	"MEX1"	Mission identifier (8 characters used)
232	SpacecraftId	"MEX1"	Spacecraft identifier (4

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	136 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

233	AdsdAct	N/A in input Data	characters used)
234	AdsdDelay	N/A in input Data	Data-set deletion: enabled
235	AdsdMaxAge	N/A in input Data	Data-set deletion: Delay between runs
236	AdsdPercen	N/A in input Data	Data-set deletion: maximum age for data-sets
237	AdsdMaxSupLog	N/A in input Data	Data-set deletion: maximum percentage used
238	NESim_Duration	N/A in input Data	Data-set handling: maximum support log entries
239	NESim_Height	N/A in input Data	Near-Earth Simulation: Duration (around Zenith)
240	NESim_Speed	N/A in input Data	Near-Earth Simulation: Spacecraft altitude
241	NESim_CoherMode	N/A in input Data	Near-Earth Simulation: Spacecraft speed
242	DSSim_Duration	N/A in input Data	Near-Earth Simulation: Caoherent mode
243	DSSim_RefTime	N/A in input Data	Deep-Space Simulation: Duration
244	DSSim_Offset	N/A in input Data	Deep-Space Simulation: Reference time
245	DSSim_DpRate	N/A in input Data	Deep-Space Simulation: Frequency offset (at RefTime)
246	DSSim_EarthPhase	N/A in input Data	Deep-Space Simulation: Doppler rate
247	DSSim_EarthPer	N/A in input Data	Deep-Space Simulation: Earth rotation phase (at RefTime)
248	DSSim_EarthAmp	N/A in input Data	Deep-Space Simulation: Earth rotation period
249	DCal_MeasL	N/A in input Data	Deep-Space Simulation: Earth rotation freq. Amplitude
250	DCal_MeasR	N/A in input Data	Delay calibration: Left-Hand circular measurement
251	DCal_CorrL	N/A in input Data	Delay calibration: Right-Hand circular measurement
252	DCal_CorrR	N/A in input Data	Delay calibration: Left-Hand circular correction
253	DCal_Calib	N/A in input Data	Delay calibration: Right-Hand circular correction
254	StatLat	N/A in input Data	Delay calibration: Delay Calibration
			Station latitude

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	137 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

255	StatLong	N/A in input Data	Station longitude
256	StatHeight	N/A in input Data	Station height
257	EarthMeanRadius	N/A in input Data	Doppler Prediction: Mean radius of earth model
258	EarthInvFlatCoef	N/A in input Data	Doppler Prediction: Inverse flattening coef. of earth model
259	DpPredDur	N/A in input Data	Doppler Prediction: Default duration

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	138 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

13.2 EXAMPLE PDS LABELS

13.2.1 DSN ODF products

13.2.1.1 Level 1a

```

PDS_VERSION_ID      = PDS3
DATA_SET_ID         = MEX-M-MRS-1/2/3-NEV-0005-V1.0
TARGET_NAME         = MARS
INSTRUMENT_HOST_NAME = "MARS EXPRESS"
SPACECRAFT_ID       = "MEX"
MISSION_PHASE_NAME   = "PRIMARY MISSION"
INSTRUMENT_NAME      = "MARS EXPRESS ORBITER RADIO SCIENCE "
INSTRUMENT_ID        = "MRS"
PRODUCER_ID         = "JPL"
DSN_STATION_NUMBER   = 43
PRODUCT_CREATION_TIME = 2003-07-07T18:21:18
STANDARD_DATA_PRODUCT_ID = "ODF "
PRODUCT_ID          = M43ODF0L1A_DPX_031871454_00.LBL
ORIGINAL_PRODUCT_ID  = "3187187A.ODF"
SOFTWARE_NAME        = "AMMOS"
DESCRIPTION          = "Orbit Data Files (ODFs) are
                        produced by the NASA/JPL Multi-Mission Navigation Radio
                        Metric Data Conditioning Team for use in determining
                        spacecraft trajectories, gravity fields affecting them,
                        and radio propagation conditions. Each ODF consists of
                        many 36-byte logical records, which fall into 7 primary
                        groups plus an End-of-File Group. An ODF usually
                        contains most groups, but may not have all. The first
                        record in each of the 7 primary groups is a header
                        record; depending on the group, there may be from zero
                        to many data records following each header. The ODF is
                        described in JPL/DSN Document 820-13, TRK-2-18
                        (various versions, with significant changes in April
                        1997). The applicable version may be included as file
                        TRK_2_18.TXT in the DOCUMENT directory of this archive."
^ODF1A_TABLE         = ("M43ODF0L1B_DPX_031871454_00.TAB",1)
^ODF1B_TABLE         = ("M43ODF0L1B_DPX_031871454_00.TAB",2)
^ODF2A_TABLE         = ("M43ODF0L1B_DPX_031871454_00.TAB",3)
^ODF2B_TABLE         = ("M43ODF0L1B_DPX_031871454_00.TAB",4)
^ODF3A_TABLE         = ("M43ODF0L1B_DPX_031871454_00.TAB",5)
^ODF3C_TABLE         = ("M43ODF0L1B_DPX_031871454_00.TAB",6)
^ODF4A43_TABLE       = ("M43ODF0L1B_DPX_031871454_00.TAB",425)
^ODF4B43_TABLE       = ("M43ODF0L1B_DPX_031871454_00.TAB",426)
^ODF8A_TABLE         = ("M43ODF0L1B_DPX_031871454_00.TAB",447)

OBJECT              = FILE
RECORD_TYPE         = FIXED_LENGTH
RECORD_BYTES        = 36
FILE_RECORDS        = 448
START_TIME          = 2003-07-06T14:54:24
STOP_TIME           = 2003-07-06T21:14:12

```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	139 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

```
OBJECT                                = ODF1A_TABLE
NAME                                 = "FILE LABEL GROUP HEADER"
INTERCHANGE_FORMAT                  = BINARY
ROWS                                = 1
COLUMNS                            = 4
ROW_BYTES                           = 16
ROW_SUFFIX_BYTES                    = 20
DESCRIPTION                          = "The File Label Group
    is usually the first of several groups of records in
    an Orbit Data File (ODF). It identifies the spacecraft,
    the file creation time, the hardware, and the software
    associated with the ODF. The File Label Group Header
    is the first record in the File Label Group. It is one
    36-byte record and is followed by one 36-byte data
    record. Occasionally, the File Label Group is omitted
    from an ODF. The row suffix bytes in the File Label
    Group Header are set to 0."

OBJECT                                = COLUMN
COLUMN_NUMBER                        = 1
NAME                                 = "PRIMARY KEY"
DATA_TYPE                           = MSB_INTEGER
START_BYTE                           = 1
BYTES                                = 4
DESCRIPTION = "Item 1: The Primary Key indicates the type
    of data records to follow. In the File Label Group Header
    this field is set to 101."
END_OBJECT                           = COLUMN
```

...

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	140 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

13.2.1.2 Level 1b

The following label is an example PDS label for only one ODF closed-loop data file of data level 1b (DPX). The labels of the other ODF level 1b data files are very similar, the differences in the label headers are listed in Table 13-1.

```

PDS_VERSION_ID          = PDS3
DATA_SET_ID              = MEX-M-MRS-1/2/3-NEV-0005-V1.0
TARGET_NAME              = MARS
INSTRUMENT_HOST_NAME    = "MARS EXPRESS"
SPACECRAFT_ID           = "MEX"
MISSION_PHASE_NAME      = "PRIMARY MISSION"
INSTRUMENT_NAME         = "MARS EXPRESS ORBITER RADIO SCIENCE "
INSTRUMENT_ID           = "MRS"
PRODUCER_ID             = "IGM COLOGNE"
DSN_STATION_NUMBER      = 43
PRODUCT_CREATION_TIME    = 2004-03-17T13:58:16.000
STANDARD_DATA_PRODUCT_ID = "ODF "
PRODUCT_ID              = M43ODF0L1B_DPX_031871454_00.LBL
ORIGINAL_PRODUCT_ID     = "M43ODF0L1B_DPX_031871454_00.LBL"
"
SOFTWARE_NAME           = "IFMS-READ-PROGRAM1.0"

^DOPPLER_XBAND          = "M43ODF0L1B_DPX_031871454_00.TAB"
OBJECT                  = FILE
  RECORD_TYPE           = FIXED_LENGTH
  RECORD_BYTES          = 89
  FILE_RECORDS          = 372
  START_TIME            = 2003-07-06T14:54:00.999
  STOP_TIME             = 2003-07-06T21:13:48.999

OBJECT                  = DOPPLER_XBAND_TABLE
  NAME                  = DOPPLER_XBAND_DATA
  INTERCHANGE_FORMAT    = ASCII
  ROWS                  = 372
  COLUMNS              = 9
  ROW_BYTES             = 89

OBJECT                  = COLUMN
  NAME                  = "SAMPLE NUMBER"
  COLUMN_NUMBER         = 1
  START_BYTE            = 1
  BYTES                 = 21
  DATA_TYPE            = ASCII_INTEGER
  UNIT                  = N/A
  DESCRIPTION           = ""
END_OBJECT              = COLUMN
...

```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	141 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

ODF level 1b data type	PRODUCT_ID	ORIGINAL_PRODUCT_ID
DPS	M43ODF1L1B_DPS_031871454_00.LBL	M43ODF1L1B_DPS_031871454_00.LBL
DPX	M43ODF1L1B_DPX_031871454_00.LBL	M43ODF1L1B_DPX_031871454_00.LBL
RGS	M43ODF1L1B_RGS_031871454_00.LBL	M43ODF1L1B_RGS_031871454_00.LBL
RGX	M43ODF1L1B_RGX_031871454_00.LBL	M43ODF1L1B_RGX_031871454_00.LBL

Table 13-1: Differences between ODF level 1b example label and other ODF level 1b data types

13.2.1.3 *Level 2*

Tbd

13.2.2 DSN RSR products

13.2.2.1 *Level 1a*

PDS_VERSION_ID	= PDS3
RECORD_TYPE	= FIXED_LENGTH
RECORD_BYTES	= 8260
FILE_RECORDS	= 5026
DATA_SET_ID	= "MEX-M-MRS-1/2/3-CR1-0010-V1.0"
TARGET_NAME	= "MARS"
INSTRUMENT_HOST_NAME	= "MARS EXPRESS"
INSTRUMENT_NAME	= "RADIO SCIENCE SUBSYSTEM"
PRODUCER_ID	= DSN
DSN_STATION_NUMBER	= 24
NOTE	= ""
PRODUCT_CREATION_TIME	= 2003-10-19T01:38:45
PRODUCT_TYPE	= RSR
PRODUCT_ID	= "3292001F.RSR"
^TABLE	= "3292001F.RSR"
START_TIME	= 2003-10-19T00:15:00
STOP_TIME	= 2003-10-19T01:38:45
SOFTWARE_NAME	= "UNK"
DOCUMENT_NAME	= "JPL D-16765"
OBJECT	= TABLE
INTERCHANGE_FORMAT	= BINARY
ROWS	= 5026
COLUMNS	= 72
ROW_BYTES	= 8260
DESCRIPTION	= "The Radio Science Receiver (RSR) is a computer-controlled open loop receiver that digitally records a spacecraft signal through the use of an analog to digital converter (ADC) and up to four digital filter sub-channels. The digital samples from each sub-channel are stored to disk in one second records in real time. In near real time the one second records are partitioned and formatted into a sequence of RSR Standard Format Data Units (SFDUs) which are transmitted to the Advanced Multi-Mission Operations System (AMMOS) at the Jet Propulsion Laboratory (JPL). Included in each RSR SFDU are the ancillary data necessary to reconstruct the signal represented by the recorded data samples.

Each SFDU is defined here as a single row in a PDS TABLE object; later SFDUs are later rows. The first fields in each row contain the ancillary data (time tags and frequency estimates, for example) that applied while the samples at the end of the record were being collected. The object definitions below explain where the fields are and what the contents represent.

Analysis of variations in the amplitude, frequency, and phase of the recorded signals provides information on the ring structure, atmospheric density, magnetic field, and charged particle environment of planets which occult the spacecraft. Variations in the recorded signal can also

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	144 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

be used for detection of gravitational waves."

OBJECT	= COLUMN
NAME	= "SFDU CONTROL AUTHORITY"
COLUMN_NUMBER	= 1
START_BYTE	= 1
BYTES	= 4
DATA_TYPE	= CHARACTER
UNIT	= "N/A"
DESCRIPTION	= "An ASCII string giving the SFDU Control Authority for this data type. Set to 'NJPL', meaning the data description information for this type of SFDU is maintained by the NASA/JPL Control Authority."
END_OBJECT	= COLUMN

...

13.2.2.2 *Level 2*

Tbd

13.2.3 IFMS closed-loop products

13.2.3.1 Level 1a

The following label is an example PDS label for only one IFMS closed-loop data file of data level 1a (D1X). The labels of the other IFMS level 1a data files are very similar, the differences in the label headers are listed in Table 13-2.

```

PDS_VERSION_ID      = "PDS3"
DATA_SET_ID         = "MEX-M-MRS-1/2/3-MCO-0121-V1.0"
PROCESSING_LEVEL_ID = 1
TARGET_NAME         = "MARS"
INSTRUMENT_HOST_NAME = "MARS EXPRESS"
INSTRUMENT_HOST_ID  = "MEX"
INSTRUMENT_NAME     = "MARS EXPRESS ORBITER RADIO SCIENCE"
INSTRUMENT_ID       = "MRS"
PRODUCER_ID         = "IFMS ESA/NNO"
DSN_STATION_NUMBER  = 32
PRODUCT_CREATION_TIME = 2004-11-23T13:53:28.000
STANDARD_DATA_PRODUCT_ID = "IFMS1"
SOURCE_PRODUCT_ID   = "NN11_MEX1_2004_137_OP_D1_055713_0000"
SOFTWARE_NAME       = "N/A"
DESCRIPTION          = "This is an IFMS Closed Loop Doppler file
                        containing all the necessary information to
                        calculate the Doppler shift. This file begins with
                        a header which contains useful information about
                        the Doppler recording equipment of the ESA 35
                        meter radio antenna station at New Norcia (NNO):
                        the Intermediate Frequency & Modem System (IFMS).
                        A description can be found in the corresponding
                        level 1b data label file in the note which
                        describes the configuration_table. This level 1b
                        label file has almost the same file name as this
                        one. The only difference is that instead of 'L1A'
                        the file name contains 'L1B'. It can be found in
                        the corresponding subfolders under DATA/LEVEL1B/.
                        A short description can also be found under
                        section 13.1 in the file naming convention
                        document MEX-MRS-IGM-IS-3016 which is located
                        under DOCUMENT/MRS_DOC. For an even more
                        detailed description see chapter 6 in the IFSM-OCC
                        interface control document IFMS_OCCFTP which is
                        located under DOCUMENT/ESA_DOC.

                        Below the header section the data section starts:
                        The 1st column contains the SampleNumber.
                        The 2nd column contains the UTC ground received
                        time of measurement in the format:
                        CCYYMMDD.HHMMSS.sss .
                        The 3rd column contains the IntervalCount which is
                        the internal General Purpose Digital Signal
                        Processor (GDSP) 17.5 MHZ Numerically Controlled
                        Oscillator (NCO) clock counts since arbitrary
                        origin.
                        The 4th column contains the unwrapped CarrierPhase
                        which is the unwrapped phase of the internal GDSP
                        carrier NCO in unit cycle.
                        The 5th column is a flag to indicate whether
                        carrier is within the window of a known spurious

```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	147 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

```

frequency (value in this case=YES) or not (value
is in this case=NO).
The 6th column is the accumulated DeltaDelay from
the data acquisition start in seconds. This value
is always one-way (More precisely: half the
two-way delta delay)."
```

```

^FILE          = "M32ICL1L1A_D1X_041370557_00.RAW"
OBJECT         = FILE
  PRODUCT_ID    = "M32ICL1L1A_D1X_041370557_00.RAW"
  RECORD_TYPE   = UNDEFINED
  START_TIME    = 2004-05-16T05:57:13.000
  STOP_TIME     = 2004-05-16T06:57:12.000

END_OBJECT     = FILE

END
```

IFMS level 1a data type	PRODUCT_ID	SOURCE_PRODUCT_ID
AG1	M32ICL1L1A_AG1_031801832_02.LBL	NN11_MEX1_2003_180_RO_G1_183209_0002
AG2	M32ICL1L1A_AG2_031801832_02.LBL	NN11_MEX1_2003_180_RO_G2_183209_0002
D1X	M32ICL1L1A_D1X_031801832_02.LBL	NN11_MEX1_2003_180_OP_D1_183209_0002
D1S	M32ICL1L1A_D1S_031801832_02.LBL	NN13_MEX1_2003_180_OP_D1_183209_0002
D2X	M32ICL1L1A_D2X_031801832_02.LBL	NN11_MEX1_2003_180_OP_D2_183209_0002
D2S	M32ICL1L1A_D2S_031801832_02.LBL	NN13_MEX1_2003_180_OP_D2_183209_0002
MET	M32ICL1L1A_MET_031801832_02.LBL	NN11_MEX1_2003_180_OP_ME_183209_0002
RGX	M32ICL1L1A_RGX_031801832_02.LBL	NN11_MEX1_2003_180_OP_RG_183209_0002
RGS	M32ICL1L1A_RGS_031801832_02.LBL	NN13_MEX1_2003_180_OP_RG_183209_0002
RCX	M32ICL1L1A_RCX_031801832_02.LBL	NN11_MEX1_2003_180_CL_RG_183209_0002
RCS	M32ICL1L1A_RCS_031801832_02.LBL	NN13_MEX1_2003_180_CL_RG_183209_0002

Table 13-2: Differences between IFMS level 1a example label and other IFMS level 1a data types

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	148 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

13.2.3.2 Level 1b

The following label is an example PDS label for only one IFMS closed-loop data file of data level 1b (D1X). The labels of the other IFMS level 1b data files are very similar, the differences in the label headers are listed in Table 13-3.

```

PDS_VERSION_ID      = "PDS3"
DATA_SET_ID         = "MEX-M-MRS-1/2/3-MCO-0121-V1.0"
PROCESSING_LEVEL_ID = 2
TARGET_NAME         = "MARS"
INSTRUMENT_HOST_NAME = "MARS EXPRESS"
INSTRUMENT_HOST_ID  = "MEX"
INSTRUMENT_NAME     = "MARS EXPRESS ORBITER RADIO SCIENCE"
INSTRUMENT_ID       = "MRS"
PRODUCER_ID         = "IGM COLOGNE"
DSN_STATION_NUMBER  = 32
PRODUCT_CREATION_TIME = 2004-11-23T13:53:28.000
STANDARD_DATA_PRODUCT_ID = "IFMS1"
SOURCE_PRODUCT_ID   = "M32ICL1L1A_D1X_041370557_00.LBL"
SOFTWARE_NAME       = "IFMS-READ-PROGRAM1.0"
DESCRIPTION          = "This label describes two files which apart from
                        the file ending .CFG and .TAB have the same name
                        as this .LBL file. The .CFG file is a ASCII text
                        file and contains configuration information about
                        the Intermediate Frequency & Modem System (IFMS).
                        The .TAB file contains the actual data. For
                        more information see the description of the .TAB
                        file and the note for the .CFG text file below."

OBJECT              = FILE
  PRODUCT_ID        = "M32ICL1L1B_D1X_041370557_00.TAB"
  RECORD_TYPE       = FIXED_LENGTH
  RECORD_BYTES      = 141
  FILE_RECORDS      = 3600
  START_TIME        = 2004-05-16T05:57:13.000
  STOP_TIME         = 2004-05-16T06:57:12.000
  DESCRIPTION        = "This is an IFMS Closed Loop Doppler file
                        containing necessary information to calculate
                        the Doppler shift. For more information see
                        column description."

^DOPPLER_TABLE      = "M32ICL1L1B_D1X_041370557_00.TAB"
  OBJECT            = DOPPLER_TABLE
    NAME            = DOPPLER_DATA
    INTERCHANGE_FORMAT = ASCII
    ROWS            = 3600
    COLUMNS        = 8
    ROW_BYTES       = 141

  OBJECT            = COLUMN
    NAME            = "SAMPLE NUMBER"
    COLUMN_NUMBER    = 1
    START_BYTE       = 1
    BYTES            = 23
    DATA_TYPE       = ASCII_INTEGER
    UNIT             = "N/A"
    DESCRIPTION      = "IDENTIFIER OF THE CURRENT SAMPLE"
  END_OBJECT        = COLUMN

  OBJECT            = COLUMN

```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	149 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

```

NAME                                = "ISO-FORMATED TIME STRING"
COLUMN_NUMBER                       = 2
START_BYTE                          = 24
BYTES                               = 24
DATA_TYPE                           = TIME
UNIT                                = "N/A"
DESCRIPTION                          = "GROUND RECEIVED SAMPLE TIME IN
                                     UTC.THE FORMAT IS
                                     CCYY-MM-DDTHH:MM:SS.sss"

END_OBJECT                          = COLUMN

OBJECT                              = COLUMN
NAME                                = "DAY OF YEAR"
COLUMN_NUMBER                       = 3
START_BYTE                          = 48
BYTES                               = 11
DATA_TYPE                           = ASCII_REAL
UNIT                                = "DAY"
DESCRIPTION                          = "GROUND RECEIVED UTC SAMPLE
                                     TIME IN FRACTIONAL DAYS OF YEAR
                                     STARTING WITH 1.00000000 AT
                                     MIDNIGHT (0 H) ON 1 JANUARY."

END_OBJECT                          = COLUMN

OBJECT                              = COLUMN
NAME                                = "EPHEMERIS TIME"
COLUMN_NUMBER                       = 4
START_BYTE                          = 59
BYTES                               = 16
DATA_TYPE                           = ASCII_REAL
UNIT                                = "SECOND"
DESCRIPTION                          = "GROUND RECEIVED SAMPLE TIME IN
                                     EPHEMERIS TIME STARTING FROM
                                     J2000 (12 h 1 January 2000 TDB)."

END_OBJECT                          = COLUMN

OBJECT                              = COLUMN
NAME                                = "INTERVAL COUNT"
COLUMN_NUMBER                       = 5
START_BYTE                          = 75
BYTES                               = 21
DATA_TYPE                           = ASCII_INTEGER
UNIT                                = "N/A"
DESCRIPTION                          = "INTERNAL GENERAL PURPOSE DIGITAL
                                     SIGNAL PROCESSOR (GDSP) 17.5 MHz
                                     NUMERICALLY CONTROLLED OSCILLATOR
                                     (NCO) CLOCK COUNT SINCE ARBITRARY
                                     ORIGIN"

END_OBJECT                          = COLUMN

OBJECT                              = COLUMN
NAME                                = "UNWRAPPED PHASE"
COLUMN_NUMBER                       = 6
START_BYTE                          = 96
BYTES                               = 21
DATA_TYPE                           = ASCII_REAL
UNIT                                = "CYCLE"
DESCRIPTION                          = "UNWRAPPED PHASE OF THE INTERNAL
                                     GDSP (GENERAL PURPOSE DIGITAL
                                     SIGNAL PROCESSOR) CARRIER
                                     NUMERICALLY CONTROLLED
                                     OSCILLATOR (NCO) "

```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	150 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

```

END_OBJECT                = COLUMN

OBJECT                     = COLUMN
  NAME                     = "SPURIOUS CARRIER"
  COLUMN_NUMBER            = 7
  START_BYTE               = 117
  BYTES                    = 2
  DATA_TYPE               = ASCII_INTEGER
  UNIT                     = "N/A"
  DESCRIPTION              = "PSEUDO LOGICAL FLAG INDICATING
                             CARRIER IS WITHIN THE WINDOW OF A
                             KNOWN SPURIOUS FREQUENCY. CAN ONLY
                             BE 0 (NO SPURIOUS CARRIER)
                             OR 1 (SPURIOUS CARRIER) "

END_OBJECT                = COLUMN

OBJECT                     = COLUMN
  NAME                     = "DELTA DELAY"
  COLUMN_NUMBER            = 8
  START_BYTE               = 119
  BYTES                    = 20
  DATA_TYPE               = ASCII_REAL
  UNIT                     = "SECOND"
  DESCRIPTION              = "ACCUMULATED DELTA DELAY FROM THE
                             DATA ACQUISITION PROCESS (DAP)
                             START. THIS VALUE IS ALWAYS
                             ONE WAY (MORE PRECISELY: HALF THE
                             TWO-WAY DELTA DELAY) "

END_OBJECT                = COLUMN
END_OBJECT                = DOPPLER_TABLE

END_OBJECT                = FILE

OBJECT                     = FILE
  PRODUCT_ID               = "M32ICL1L1B_D1X_041370557_00.CFG"
  RECORD_TYPE              = FIXED_LENGTH
  RECORD_BYTES             = 17377
  FILE_RECORDS             = 1
  START_TIME               = 2004-05-16T05:57:13.000
  STOP_TIME                = 2004-05-16T06:57:12.000
^CONFIGURATION_TEXT       = "M32ICL1L1B_D1X_041370557_00.CFG"
  OBJECT                   = TEXT
  NOTE                     = "The .CFG file contains a table with
                             useful information about the Doppler
                             recording equipment of the ESA 35 meter
                             radio antenna station at New Norcia (NNO):
                             the Intermediate Frequency & Modem System
                             (IFMS). It is in principle the same as the
                             header of the corresponding raw data file
                             in the Level 1A folder. The only
                             difference is that the second column, the
                             sample time in UTC was reformatted to ISO
                             format. In additon two other columns with
                             sample time as UTC in fraction of day of
                             year and sample time as ephemeris time in
                             seconds were inserted. See column
                             description of the TABLE object above. In
                             addition the flag values were changed from
                             YES and NO in the 1A file to the numerical
                             values 1 and 0 in the 1B file.

                             For data processors a brief description of

```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	151 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

the most important keywords:

IMPORTANT NOTE: IF ONE OR MORE OF THE FOLLOWING KEYWORDS HAS VALUES N/A THEN PROBABLY SOMETHING WENT WRONG WITH DATA RECORDING OR/AND SIGNAL RECEIVING!

DAP_TYPE identifies which Data Acquisition Process (DAP) was used for the data file. There are two subrecording systems for each IFMS receiving device denoted by the numbers 1 and 2.

DAP_TYPE = D1 identifies Doppler data from recording system 1

DAP_TYPE = D2 identifies Doppler data from recording system 2

DAP_TYPE = G1 identifies Auto Gain Control (AGC) data from recording system 1

DAP_TYPE = G2 identifies Auto Gain Control (AGC) data from recording system 2

DAP_TYPE = ME identifies meteo data

DAP_TYPE = RG identifies ranging data

FIRST_SAMPLE_TIME and LAST_SAMPLE_TIME give the time of the first and last sample recorded in the corresponding data file in UTC: Format (CCYYMMDD.HHMMSS.sss).

Example: 20040621.025208.000 corresponds to the 2004-06-21T02:52:08.000 in UTC.

SAMPLE_PERIOD is the time elapsed between subsequent measurements in seconds.

ACTUAL_CARRIER_INDIC provides the actual uplink carrier frequency offset as follows: $\text{ActualCarrierFreqOffset} = 50 \text{ MHz} - \text{actual_carrier_indic} \times 17.5\text{E}6/2\text{EXP}30$.

ACTUAL_TONE_INDIC (only meaningful for ranging data) provides the actual tone frequency as follows: $\text{tone_frequency} = \text{actual_tone_indic} \times 17.4\text{E}6/2\text{EXP}32 \text{ Hz}$.

RG_DATA_CORRECTED: (only meaningful for ranging data) Flag to indicate whether the measurements during the ambiguity resolution process have been corrected.

The following keywords are needed to compute the actual uplink and downlink frequency: Modulator used to generate the output carrier frequency. Can assume the values 70 or 230 MHz. For each DAP_TYPE there is a corresponding SOURCE keyword of the form DAP_TYPESource (Example: D1Source, D2Source etc.) which can be found further down in the .CFG table and can assume one of the following values: Rgd, Rcd, Scd. These are abbreviations for Ranging receiver and demodulator, Remnant and Suppress Carrier demodulators. Only the DAP_TYPESource value corresponding to the actual DAP_TYPE as indicated in the 4th row of the .CFG table is meaningful for the corresponding data file.

For ranging data DAP_TYPESource is always equal RGD thus there is no such keyword as RgSource. For each DAP_TYPESource value exist two other important keywords of the

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	152 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

form:
DAP_TYPESourceUplkConv and
DAP_TYPESourceDnlkConv
(Example RgdUplkConv, RgdDnlkConv)

Now the uplink frequency can be computed
by:

UplinkCarrierFreq=UlmCarFrSel
+ ActualCarrierFreqOffset
+ DAP_TYPESourceUplkConv

The two keywords DAP_TYPESourceTR1 and
DAP_TYPESourceTR2 provide the transponder
ratio DAP_TYPESourceTR1/DAP_TYPESourceTR2
with which the frequency of the incoming
radio signal on board the space craft was
multiplied to generate a coherent downlink
frequency.

Further explanation of the IFMS
configuration file format can be found
under section 13.1 in the file naming
convention document MEX-MRS-IGM-IS-3016
which is located under DOCUMENT/MRS_DOC .
For an even more detailed description see
chapter 6 in the IFMS-OCC interface
control document IFMS_OCCFTP which is
located under DOCUMENT/ESA_DOC . "

```
INTERCHANGE_FORMAT      = ASCII
PUBLICATION_DATE         = "2004-09-21"
END_OBJECT               = TEXT
END_OBJECT                = FILE
END
```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	153 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

IFMS 1b type	level data	PRODUCT_ID	SOURCE_PRODUCT_ID
AG1		M32ICL1L1B_AG1_031801832_02.LBL	NN11_MEX1_2003_180_RO_G1_183209_0002
AG2		M32ICL1L1B_AG2_031801832_02.LBL	NN11_MEX1_2003_180_RO_G2_183209_0002
D1X		M32ICL1L1B_D1X_031801832_02.LBL	NN11_MEX1_2003_180_OP_D1_183209_0002
D1S		M32ICL1L1B_D1S_031801832_02.LBL	NN13_MEX1_2003_180_OP_D1_183209_0002
D2X		M32ICL1L1B_D2X_031801832_02.LBL	NN11_MEX1_2003_180_OP_D2_183209_0002
D2S		M32ICL1L1B_D2S_031801832_02.LBL	NN13_MEX1_2003_180_OP_D2_183209_0002
MET		M32ICL1L1B_MET_031801832_02.LBL	NN11_MEX1_2003_180_OP_ME_183209_0002
RGX		M32ICL1L1B_RGX_031801832_02.LBL	NN11_MEX1_2003_180_OP_RG_183209_0002
RGS		M32ICL1L1B_RGS_031801832_02.LBL	NN13_MEX1_2003_180_OP_RG_183209_0002
RCX		M32ICL1L1B_RCX_031801832_02.LBL	NN11_MEX1_2003_180_CL_RG_183209_0002
RCS		M32ICL1L1B_RCS_031801832_02.LBL	NN13_MEX1_2003_180_CL_RG_183209_0002

Table 13-3: Differences between IFMS level 1b example label and other IFMS level 1b data types

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	154 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

13.2.3.3 Level 2

The following label is an example PDS label for only one IFMS closed-loop data file of data level 2 (D1X). The labels of the other IFMS level 2 data files are very similar, the differences in the label headers are listed in Table 13-4.

```

PDS_VERSION_ID      = "PDS3"
DATA_SET_ID         = "MEX-M-MRS-1/2/3-MCO-0121-V1.0"
PROCESSING_LEVEL_ID = 3
TARGET_NAME        = "MARS"
INSTRUMENT_HOST_NAME = "MARS EXPRESS"
INSTRUMENT_HOST_ID  = "MEX"
INSTRUMENT_NAME     = "MARS EXPRESS ORBITER RADIO SCIENCE"
INSTRUMENT_ID       = "MRS"
PRODUCER_ID        = "IGM COLOGNE"
DSN_STATION_NUMBER  = 32
PRODUCT_CREATION_TIME = 2004-10-12T10:11:14.000
STANDARD_DATA_PRODUCT_ID = "IFMS1"
PRODUCT_ID          = "M32ICL1L02_D1X_041370557_00.LBL"
SOURCE_PRODUCT_ID   = "NN11_MEX1_2004_137_OP_D1_055713_0000"
SOFTWARE_NAME       = "IFMS-DOPPLER-1ATO2-PROGRAM1.0"
DESCRIPTION          = "This is a calibrated IFMS Closed Loop Doppler
                        file containing skyfrequency, impact parameter,
                        observed and calibrated Doppler shift in frequency
                        AGC and Differential Doppler. For more information
                        see column description."

^DOPPLER_TABLE      = "M32ICL1L02_D1X_041370557_00.TAB"
OBJECT              = FILE
    RECORD_TYPE      = FIXED_LENGTH
    RECORD_BYTES     = 490
    FILE_RECORDS     = 3598
    START_TIME       = 2004-05-16T05:57:13.000
    STOP_TIME        = 2004-05-16T06:57:12.000
    OBJECT            = DOPPLER_TABLE
        NAME          = DOPPLER_DATA
        INTERCHANGE_FORMAT = ASCII
        ROWS          = 3598
        COLUMNS      = 19
        ROW_BYTES     = 490

    OBJECT            = COLUMN
        NAME          = "SAMPLE NUMBER"
        COLUMN_NUMBER = 1
        START_BYTE    = 1
        BYTES         = 7
        DATA_TYPE    = ASCII_INTEGER
        UNIT          = "N/A"
        DESCRIPTION   = "IDENTIFIER OF THE CURRENT SAMPLE"
    END_OBJECT        = COLUMN

    OBJECT            = COLUMN
        NAME          = "ISO TIME"
        COLUMN_NUMBER = 2
        START_BYTE    = 8
        BYTES         = 25
        DATA_TYPE    = TIME
        UNIT          = "N/A"
        DESCRIPTION   = "GROUND RECEIVED SAMPLE TIME IN

```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	155 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

```

                                UTC, THE FORMAT IS
                                CCYY-MM-DDTHH:MM:SS.sss"
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = "FRACTIONS OF DAY OF YEAR"
  COLUMN_NUMBER                 = 3
  START_BYTE                    = 33
  BYTES                          = 17
  DATA_TYPE                    = ASCII_REAL
  UNIT                          = "DAY"
  DESCRIPTION                    = "GROUND RECEIVED SAMPLE TIME
                                AS UTC IN FRACTIONS OF DAY OF YEAR"
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = "EPHEMERIS TIME SINCE 01.01.2000"
  COLUMN_NUMBER                 = 4
  START_BYTE                    = 50
  BYTES                          = 17
  DATA_TYPE                    = ASCII_REAL
  UNIT                          = "SECOND"
  DESCRIPTION                    = "GROUND RECEIVED TIME AS EPHEMERIS
                                TIME SINCE 01.01.2000"
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = "IMPACT PARAMETER"
  COLUMN_NUMBER                 = 5
  START_BYTE                    = 67
  BYTES                          = 12
  DATA_TYPE                    = ASCII_REAL
  UNIT                          = "KM"
  DESCRIPTION                    = "CLOSEST APPROACH OF THE RADIO RAY PATH
                                TO THE PLANET CENTER OR THE SUN'S
                                CENTER (GEOMETRIC) FOR OCCULTATIONS,
                                RESPECTIVELY OR DISTANCE OF THE S/C TO
                                THE CENTER OF MASS FOR GRAVITY
                                OBSERVATIONS"
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = "TRANSMIT TIME IN ISO TIME"
  COLUMN_NUMBER                 = 6
  START_BYTE                    = 79
  BYTES                          = 25
  DATA_TYPE                    = TIME
  UNIT                          = "N/A"
  DESCRIPTION                    = "TRANSMIT OF THE UPLINK SIGNAL TIME IN
                                ISO-FORMAT, UTC"
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = "UPLINK FREQUENCY"
  COLUMN_NUMBER                 = 7
  START_BYTE                    = 104
  BYTES                          = 17
  DATA_TYPE                    = ASCII_REAL
  UNIT                          = "HZ"
  DESCRIPTION                    = "UPLINK FREQUENCY"
END_OBJECT                      = COLUMN

```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	156 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

```

OBJECT                                = COLUMN
NAME                                = "UPLINK FREQUENCY DRIFT RATE"
COLUMN_NUMBER                       = 8
START_BYTE                         = 121
BYTES                              = 12
DATA_TYPE                          = ASCII_REAL
UNIT                               = "HZ PER SECOND"
DESCRIPTION                        = "UPLINK FREQUENCY DRIFT RATE"
END_OBJECT                         = COLUMN

OBJECT                                = COLUMN
NAME                                = "OBSERVED S-BAND SKY FREQUENCY"
COLUMN_NUMBER                       = 9
START_BYTE                         = 133
BYTES                              = 17
DATA_TYPE                          = ASCII_REAL
UNIT                               = "HZ"
DESCRIPTION                        = "TRUE OBSERVED SKY FREQUENCY"
END_OBJECT                         = COLUMN

OBJECT                                = COLUMN
NAME                                = "PREDICTED S-BAND SKY FREQUENCY"
COLUMN_NUMBER                       = 10
START_BYTE                         = 150
BYTES                              = 17
DATA_TYPE                          = ASCII_REAL
UNIT                               = "HZ"
DESCRIPTION                        = "PREDICTED SKY FREQUENCY"
END_OBJECT                         = COLUMN

OBJECT                                = COLUMN
NAME                                = "OBSERVED S-BAND FREQUENCY SHIFT"
COLUMN_NUMBER                       = 11
START_BYTE                         = 167
BYTES                              = 17
DATA_TYPE                          = ASCII_REAL
UNIT                               = "HZ"
DESCRIPTION                        = "THE TRUE OBSERVED FREQUENCY SHIFT"
END_OBJECT                         = COLUMN

OBJECT                                = COLUMN
NAME                                = "CALIBRATED S-BAND FREQUENCY SHIFT"
COLUMN_NUMBER                       = 12
START_BYTE                         = 184
BYTES                              = 17
DATA_TYPE                          = ASCII_REAL
UNIT                               = "HZ"
DESCRIPTION                        = "OBSERVED S-BAND FREQUENCY SHIFT CORREC
ONLY FOR PROPAGATION IN THE EARTH
NEUTRAL ATMOSPHERE. CORRECTED FOR
DOWNLINK PLASMA PROPAGATION USING
DUAL-FREQUENCY DOPPLER DATA IF
AVAILABLE ONLY FOR GRAVITY
OBSERVATIONS. FOR OCCULTATIONS, SOLAR
CONJUNCTIONS AND IF DUAL-FREQUENCY
DATA ARE NOT AVAILABLE, AN EARTH
IONOSPHERE MODEL IS USED"
END_OBJECT                         = COLUMN

OBJECT                                = COLUMN
NAME                                = "PREDICTED S-BAND FREQUENCY SHIFT"
COLUMN_NUMBER                       = 13

```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number	Issue: 10	Revision:	5
MEX-MRS-IGM-IS-3016	Date: 01.12.2004	Page	157 of 161
ROS-RSI-IGM-IS-3087			
VEX-VRA-IGM-IS-3009			

```

START_BYTE      = 201
BYTES           = 17
DATA_TYPE       = ASCII_REAL
UNIT            = "HZ"
DESCRIPTION     = "PREDICTED S-BAND FREQUENCY SHIFT WITH
                  KNOWN GRAVITY FIELD AND RADIATION
                  PRESSURE"

END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "RESIDUAL S-BAND FREQUENCY SHIFT"
COLUMN_NUMBER   = 14
START_BYTE     = 218
BYTES          = 14
DATA_TYPE      = ASCII_REAL
UNIT           = "HZ"
DESCRIPTION    = "RESIDUAL CALIBRATED S-BAND FREQUENCY
                  S"

END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "AGC S-BAND"
COLUMN_NUMBER   = 15
START_BYTE     = 232
BYTES          = 14
DATA_TYPE      = ASCII_REAL
UNIT           = DBM
DESCRIPTION    = "FOR OPEN-LOOP THIS VALUE IS SET
                  -9999999.999"

INVALID_CONSTANT = -9999999.999
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "DIFFERENTIAL DOPPLER"
COLUMN_NUMBER   = 16
START_BYTE     = 246
BYTES          = 14
DATA_TYPE      = ASCII_REAL
UNIT           = "HZ"
DESCRIPTION    = "S-BAND - 3/11 X-BAND, IF S-BAND IS NOT
                  AVAILABLE THIS COLUMN IS SET
                  -9999999.999"

INVALID_CONSTANT = -9999999.999
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "STANDARD DEVIATION FREQUENCY S-BAND"
COLUMN_NUMBER   = 17
START_BYTE     = 260
BYTES          = 14
DATA_TYPE      = ASCII_REAL
UNIT           = "HZ"
DESCRIPTION    = "ONLY AVAILABLE FOR OPEN-LOOP,
                  IF CLOSED-LOOP THIS COLUMN IS SET
                  -9999999.999"

INVALID_CONSTANT = -9999999.999
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "SNR S-BAND"
COLUMN_NUMBER   = 18
START_BYTE     = 264

```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa
Document name : File Naming Convention

Document number

Issue: 10

Revision:

5

MEX-MRS-IGM-IS-3016

Date: 01.12.2004

Page

158 of 161

ROS-RSI-IGM-IS-3087

VEX-VRA-IGM-IS-3009

```

    BYTES                                = 14
    DATA_TYPE                           = ASCII_REAL
    UNIT                                 = "DB"
    DESCRIPTION                           = "ONLY AVAILABLE FOR OPEN-LOOP,
                                           IF CLOSED-LOOP THIS COLUMN IS SET
                                           -9999999.999"

    INVALID_CONSTANT                      = -9999999.999
END_OBJECT                              = COLUMN

OBJECT                                  = COLUMN
    NAME                                = "STANDARD DEVIATION SNR S-BAND"
    COLUMN_NUMBER                        = 19
    START_BYTE                           = 278
    BYTES                                = 14
    DATA_TYPE                           = ASCII_REAL
    UNIT                                 = "DB"
    DESCRIPTION                           = "ONLY AVAILABLE FOR OPEN-LOOP,
                                           IF CLOSED-LOOP THIS COLUMN IS SET
                                           -9999999.999"

    INVALID_CONSTANT                      = -9999999.999
END_OBJECT                              = COLUMN
END_OBJECT                              = DOPPLER_TABLE

END_OBJECT                              = FILE

END
```

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa

Document name: **File Naming Convention**

Document number: **MEX-MRS-IGM-IS-3016** Issue: 10 Revision: 3
ROS-RSI-IGM-IS-3087 Date: 23.11.2004 Page 159 of 161
VEX-VRA-IGM-IS-3009

IFMS level 2 data type	PRODUCT_ID	SOURCE_PRODUCT_ID	SOFTWARE_NAME
AG1	M32ICL1L1B_AG1_031801832_02.LBL	NN11_MEX1_2003_180_RO_G1_183209_0002	IFMS-DOPPLER-1ATO2-PROGRAM-6_8-V1.
AG2	M32ICL1L1B_AG2_031801832_02.LBL	NN11_MEX1_2003_180_RO_G2_183209_0002	IFMS-DOPPLER-1ATO2-PROGRAM-6_8-V1.
D1X	M32ICL1L1B_D1X_031801832_02.LBL	NN11_MEX1_2003_180_OP_D1_183209_0002	IFMS-RANGE-1ATO2-PROGRAM-6_8-V1.
D1S	M32ICL1L1B_D1S_031801832_02.LBL	NN13_MEX1_2003_180_OP_D1_183209_0002	IFMS-DOPPLER-1ATO2-PROGRAM-6_8-V1.
D2X	M32ICL1L1B_D2X_031801832_02.LBL	NN11_MEX1_2003_180_OP_D2_183209_0002	IFMS-RANGE-1ATO2-PROGRAM-6_8-V1.
D2S	M32ICL1L1B_D2S_031801832_02.LBL	NN13_MEX1_2003_180_OP_D2_183209_0002	IFMS-DOPPLER-1ATO2-PROGRAM-6_8-V1.
MET	M32ICL1L1B_MET_031801832_02.LBL	NN11_MEX1_2003_180_OP_ME_183209_0002	IFMS-RANGE-1ATO2-PROGRAM-6_8-V1.
RGX	M32ICL1L1B_RGX_031801832_02.LBL	NN11_MEX1_2003_180_OP_RG_183209_0002	IFMS-DOPPLER-1ATO2-PROGRAM-6_8-V1.
RGS	M32ICL1L1B_RGS_031801832_02.LBL	NN13_MEX1_2003_180_OP_RG_183209_0002	IFMS-RANGE-1ATO2-PROGRAM-6_8-V1.
RCX	M32ICL1L1B_RCX_031801832_02.LBL	NN11_MEX1_2003_180_CL_RG_183209_0002	IFMS-DOPPLER-1ATO2-PROGRAM-6_8-V1.
RCS	M32ICL1L1B_RCS_031801832_02.LBL	NN13_MEX1_2003_180_CL_RG_183209_0002	IFMS-RANGE-1ATO2-PROGRAM-6_8-V1.

Table 13-4: Differences between IFMS level 2 example label and other IFMS level 2 data types

13.2.4 IFMS open-loop products

13.2.4.1 Level 1a

tbd

13.2.4.2 Level 2

Tbd

ROSETTA Radio Science Investigations RSI
MARS EXPRESS Radio Science Experiment MaRS
VENUS EXPRESS Radio Science VeRa

Document name: **File Naming Convention**

Document number: **MEX-MRS-IGM-IS-3016**

ROS-RSI-IGM-IS-3087

VEX-VRA-IGM-IS-3009

Issue: 10

Date: 23.11.2004

Revision: 3

Page 161 of 161

Page left free